Pella® Impervia® Sliding Patio Door Accessibility Sill Filler
Installation Instruction

These instructions apply to:
Sliding Patio Door 06/2021 - Current

Tools Required:
- Measuring tape
- Metal cutting saw


1 Sill Filler Installation:

A. Open vent panel and screen door to the fully open position.


B. Measure the distance between the jamb and the sill bracket.



Measure from here

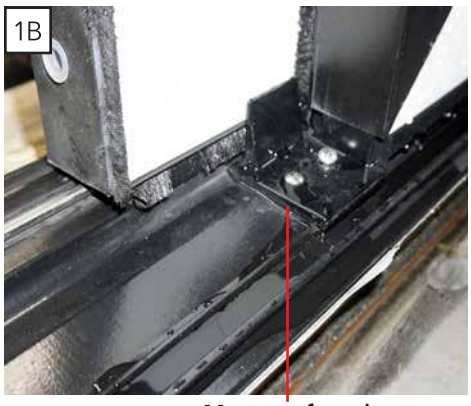

Measure from here

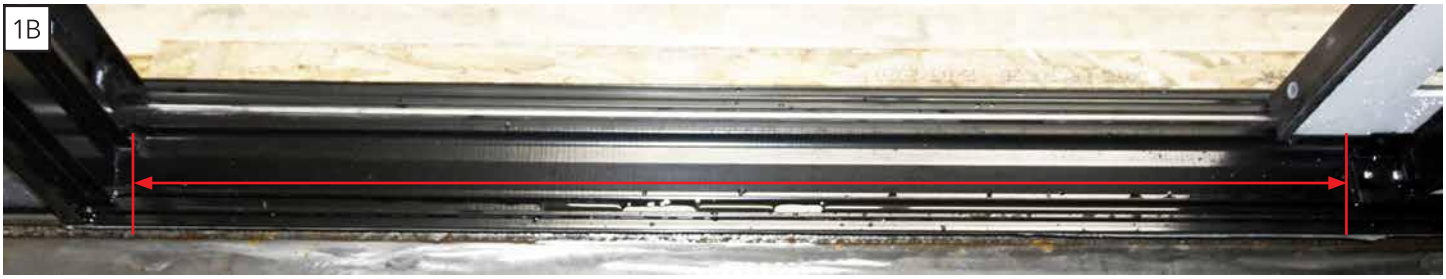

C. Cut the “Accessibility Sill Filler” to the measured length minus 1".

D. Remove the foam tape backer on the back side of the sill filler to expose the tape.




© 2021 Pella Corporation

GIF-000002747- Part Number: 82LM0000

1 Sill Filler Installation (Continued):

E. Place the part tape side down with the snap feature of the part landing on the 2nd track of the door sill. DO NOT press down to secure the tape yet. Sill can not be easily adjusted once the tape is pressed down.



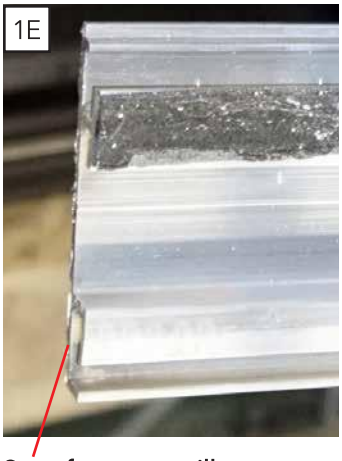





F. Adjust the part along the sill until it is approximately 1/2" from the jamb on one side and the sill bracket on the other side with the snap feature on the 2nd track as noted in Step 1E.





G. Press down on the part to secure the tape and ensure the part is fully snapped on the door sill.





© 2021 Pella Corporation