VINYL WINDOWS AND DOORS

Manufactured by Pella Corporation

Questions? Call 1 (800) 374-4758

INSTALLATION INSTRUCTION

Double-Hung and Single-Hung Sash Lift

These instructions apply to:

350 Series 2011 - 04/2021

Tools Required:

- Phillips #2 screwdriver
- Pencil
- Scissors
- Tape measure

Pella® Material Required:


- Double-Hung and Single-Hung Sash Package




1 Determine Where To Put The Sash Lift(s):

A. For windows with a single lock, measure and locate the center line of the bottom vent rail. Mark with a pencil line.

B. For 2-lock windows, measure 5-3/16" from the edge of glass and mark with a pencil.

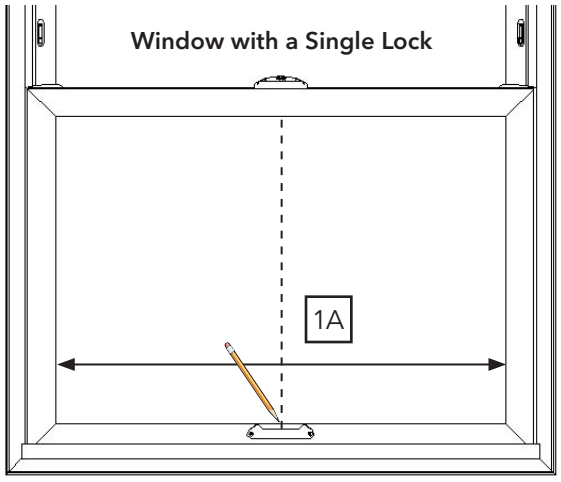

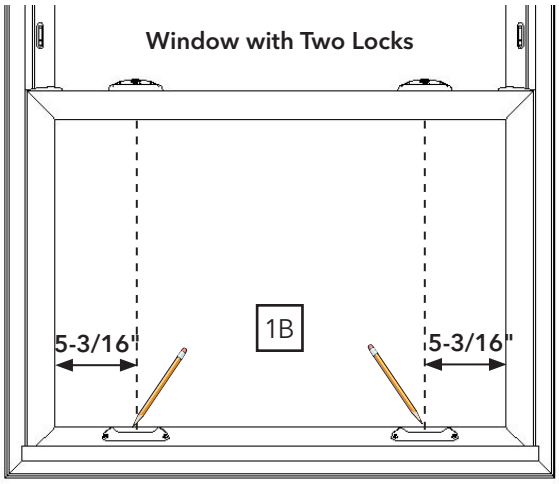


2 Use Template To Attach Sash Lift(s):

A. Cut out the template, and poke small holes through the center of the screw hole locations.

B. With the window open, align dashed line "B" with the bottom of the sash rail. Align the center line of the template with the centerline mark that was placed on the sash in step 1.

C. With the template in place, use a pencil to mark the center of the screw hole locations.

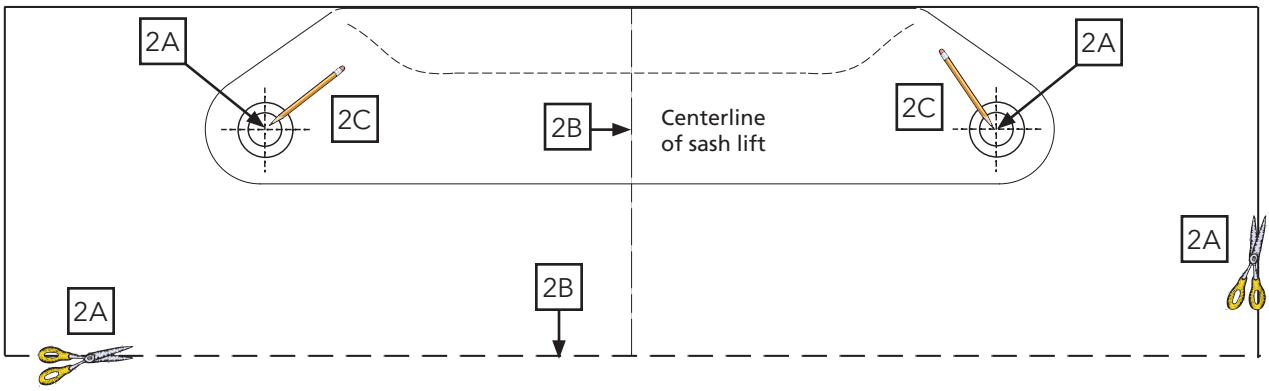

3 Attach The Sash Lift With The Screws Provided. DO NOT Over Tighten The Screws.

© 2014 Pella Corporation