Sliding Patio Door OXO Screen Joiner

INSTALLATION INSTRUCTION

Note: The Sliding Screen is installed on the **Exterior** of the Sliding Patio Door.


Parts List (Unit: OXO):


- (1) Top end cap
- (1) Bottom end cap
- (6) #8 x 1/2" self drilling screw (mull cover)
- (1) 1-1/2" mull vover
- (1) Screen joiner


Tools Required:

- Drill with Phillips bit


To remove existing joiner, see service instruction.

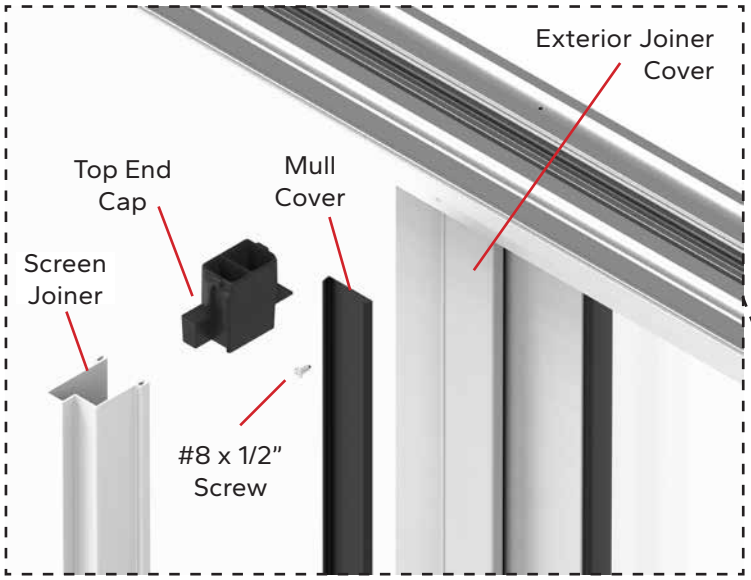

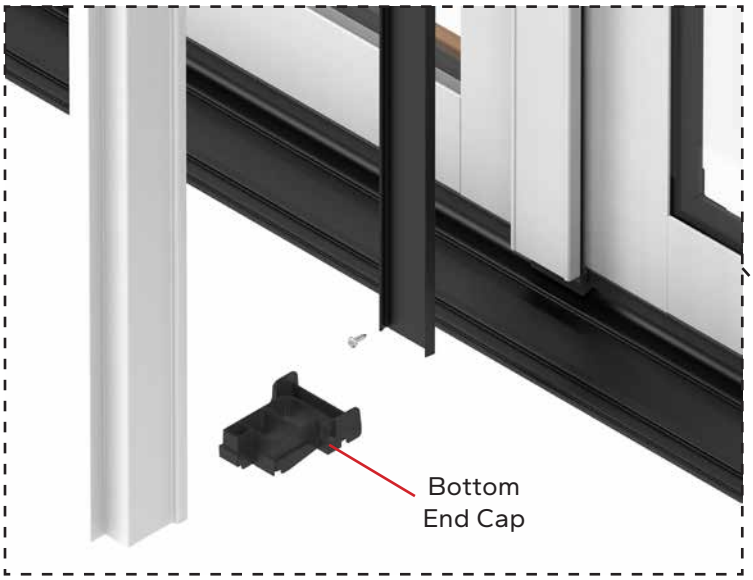

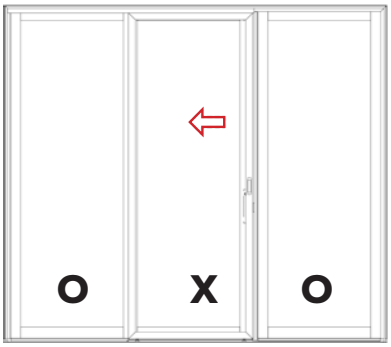

(OX) Locking Screen

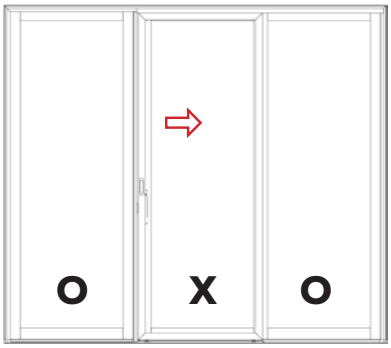

(XO) Locking Screen





1 Attach the Top End Cap:


A. **Insert the top end cap into the exterior frame at the head.** It is easier to start to the right of the exterior joiner and slide into position after snapping in the cap.

B. **Rotate the top end cap counter-clockwise** to snap it into the door frame head.

C. **Slide the top end cap** until it is centered in the exterior joiner cover.

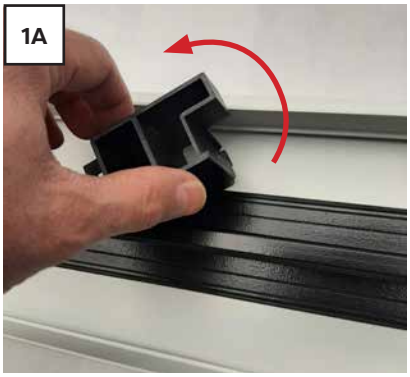


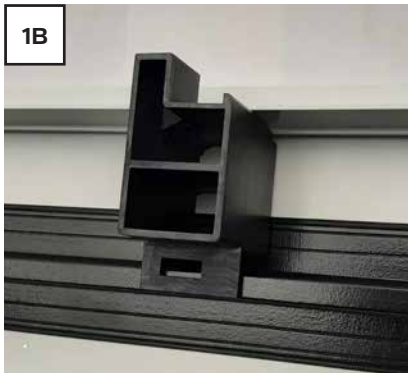

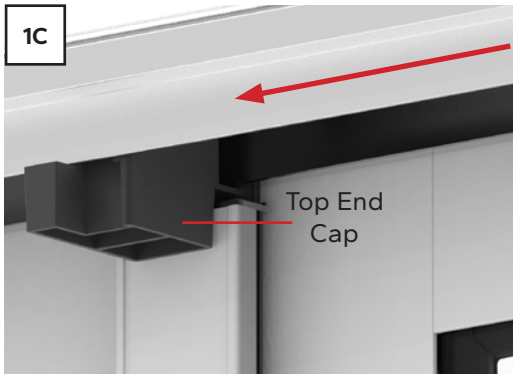

2 Attach the Lower End Cap:


A. **At the center of the exterior joiner cover,** place the lower end cap onto the sill.

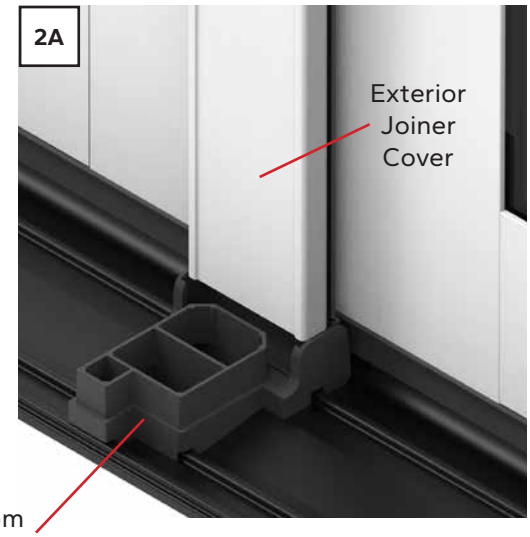


3 Attach the Mull Cover:

A. **Position the mull cover in the center of the exterior joiner cover.**

B. **Attach the mull cover to the exterior joiner cover** using #8 x 1/2" self drilling screws. Locate screws 2" from each end of mull cover and the spaced no more than 24" apart.

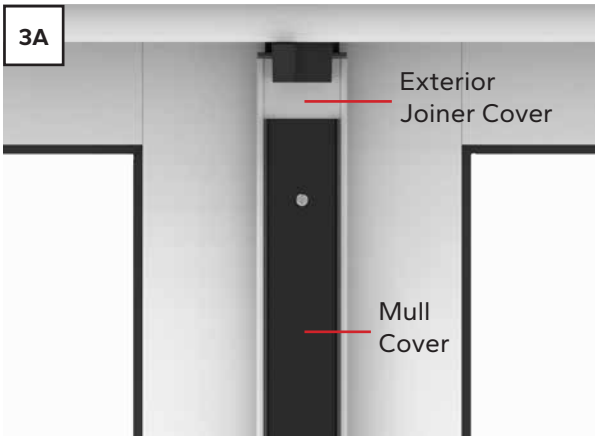

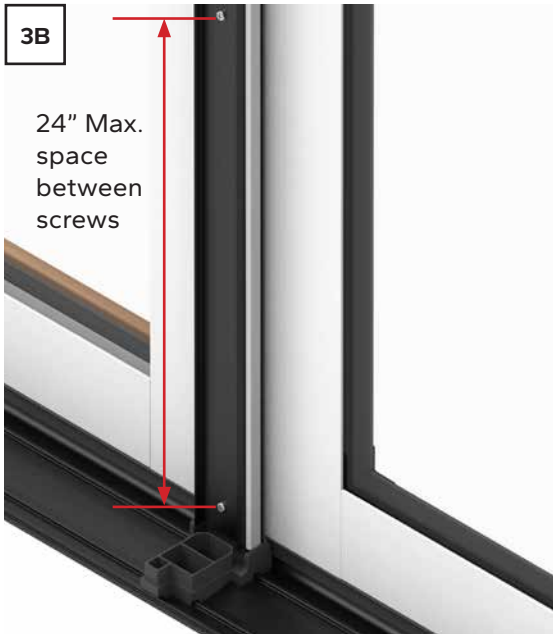

4 Attach the Screen Joiner:

A. **Position the screen joiner at the center of the mull cover.** Align the ends caps into the screen joiner profile. Starting at the bottom, squeeze the screen joiner and press it straight onto the mull cover.

B. **Squeeze and press,** working from the bottom up to the top until the screen joiner is attached all the way to the top.

