Multi-Point Lock Strike Replacement

Service Instruction

These instructions apply to:

Pella® Entry Doors 7/2011-02/2020
Architect Series® Entry Doors 7/2011-02/2020
Pella Entry Doors 03/2020 - Current

Tools Required:

- Powered driver with a Phillips bit

1 Multi-Point Lock Strike Removal


Note: One of the strike attachment screws is located behind the frame weatherstrip.

A. Use a putty knife to pry the weatherstrip out of the frame kerf at the strike location.





B. Remove the strike attachment screws

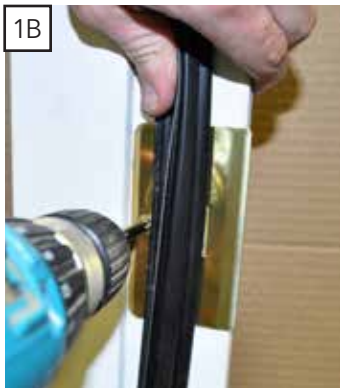



C. Remove the strike and the strike reinforcement plate.





© 2011 Pella Corporation

1 Multi-Point Lock Strike Removal (continued)

D. Remove the strike dust box from the frame.





2 Multi-Point Lock Strike Installation

A. Insert the strike dust box in the orientation as shown into the center of the frame rout.





B. Place the reinforcement plate and the strike onto the frame.





C. Install the strike attachment screws and reseat the frame weatherstrip into the frame kerf.







© 2011 Pella Corporation