SERVICE INSTRUCTION

Roller Adjustment—Sliding Patio Door

These instructions apply to:

Pella® 150 Series 02/2020 - Current
Centera by Pella™ 02/2007 - 02/2012
ThermaStar by Pella® 2003 - 03/2021
Encompass by Pella® 02/2008 - Current

Tools Required:

- Phillips #2 or #3 screwdriver

TWO OR MORE PEOPLE WILL BE REQUIRED FOR THE FOLLOWING INSTRUCTION!

NOTE: Remember to work safely while doing any maintenance or repair. This includes wearing safety glasses and using safe work practices. Make sure your work area is unobstructed and clear of window coverings, etc.

1 Adjusting The Roller:

A. Unlock patio door and slide the operating panel open 1/4".

B. Check the gap between the door panel lockstile and the frame. If the gap at the top and bottom are not equal, the rollers may be adjusted to make the gap equal.

C. Locate the patio door roller adjustment screws on both sides of the slide panel near the bottom. The lower of the two screws is the adjustment screw.

D. Adjust the patio door rollers by turning the screw clockwise (to raise a side of the door panel) and counter-clockwise (to lower it).

E. Adjust the sliding panel initially so that it is plumb or parallel with the door jamb.

F. Next, to position the sliding panel so the weatherstrip makes equal contact with the head and sill, adjust both rollers up or down the same number of turns, until centered.


1B



1C



1E

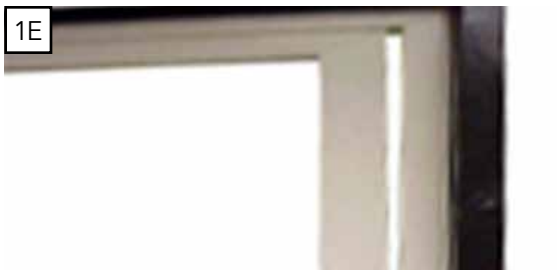

1E



© 2021 Pella Corporation