VINYL WINDOWS AND DOORS

Manufactured by Pella Corporation

Questions? Call 1 (800) 374-4758

SERVICE INSTRUCTION


Weep Slot Enhancement - East Sliding Window, Double-Hung; West Sliding Window and Single-Hung Block Frame, 3-1/4" Frame Depth Nail Fin, 4" Frame Depth, Nail Fin with J-Channel, 4-3/16" Frame Depth

These instructions apply to:

Pella® 150 Series 2020 - Current
Centera by Pella™ 12/2006 - 2011
ThermaStar by Pella® 2003 - 01/2022
Encompass by Pella® 02/2008 - Current

Supplies Needed:

• Weep slot covers




NOTE: Use of a weep slot cover may impact product performance.

1 Weep Cover Installation:

A. Locate the weep slots on the exterior of the frame sill.


B. Clean the surface area around the weep slot with warm, soapy water. Using a clean soft cloth, thoroughly dry the cleaned area.

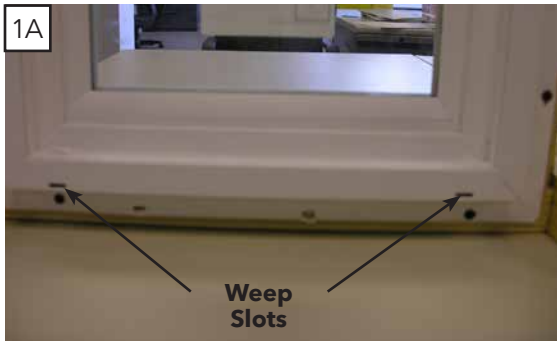

C. Test fit the weep slot covers over the weep slots, check orientation and location.

Orientation: Ensure the hinged flap of the weep slot cover is at the top.

Location: Ensure the hinged flap fully covers the weep slot in the sill. Make pencil mark at the top and side of the weep slot cover to simplify final placement.

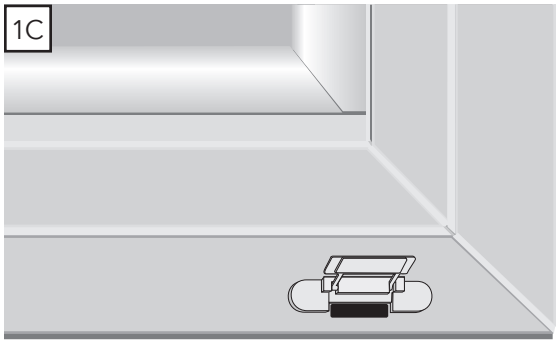

D. Remove the release paper from the back of the Hinged weep cover.

E. Place a weep slot cover over one of the weep slots, and press down to adhere it to the window frame.

F. Repeat for the second weep slot.

