SERVICE INSTRUCTION
J-Channel Corner Cover Replacement


These instructions apply to:
Pella® 350 Series 2011 - 04/2021

Tools Required:
- Flat-Blade Screwdriver


NOTE: Remember to work safely while doing any maintenance or repair. This includes wearing safety glasses and using safe work practices. Make sure your work area is unobstructed and clear of window coverings, etc..

1 J-Channel Corner Cover Removal:

A. Use a flat blade screwdriver to pry the corner cover off the J-channel. Insert the screwdriver at the position indicated and pry the cover from the corner.

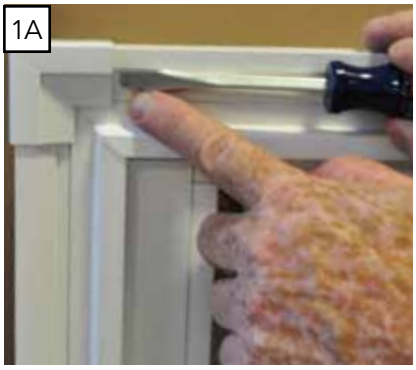



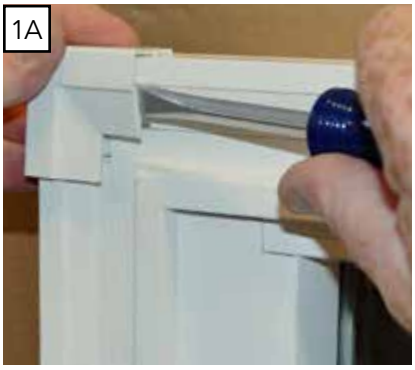





© 2021 Pella Corporation

2 J-Channel Corner Cover Installationl:

A. Install the corner cover over the J-channel, press to snap the tabs into the slots in the channel.





