SERVICE INSTRUCTION

Patio Door Lock Adjustment–Sliding Patio Door

These instructions apply to:

Pella® 150 Series 02/2020 - Current
Centera by Pella™ 02/2007 - 02/2012
ThermaStar by Pella® 2003 - 03/2021
Encompass by Pella® 02/2008 - Current

Tools Required:

- Small flat-head screwdriver

NOTE: Remember to work safely while doing any maintenance or repair. This includes wearing safety glasses and using safe work practices. Make sure your work area is unobstructed and clear of window coverings, etc.

NOTE: If a sliding patio door has more than 1/8" movement from side-to-side with the slide panel in the locked position, or if the door is difficult to latch, the lock can be adjusted.

1 Adjusting The Patio Door Lock:

A. Unlock the door and slide the operating door panel to the open position. Extend the lock hook by operating the latch lever.






B. Locate the patio door lock adjustment screw on the lockstile of the slide panel near the handle.

C. Adjust the lock by turning the screw counter-clockwise to tighten the lock (shorten how far the lock hook extends) or clockwise to loosen it (lengthen how far the lock hook extends).

D. Retract the lock hook and close the operating panel. Check to make sure the door will latch, and the movement of the door panel when locked is 1/8" or less. Readjust as needed.



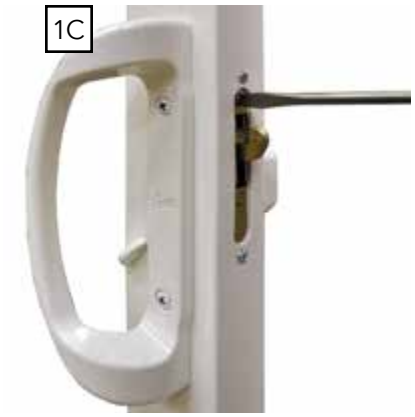

© 2021 Pella Corporation