SERVICE INSTRUCTION

Half Screen Bugstrip (Mohair) Replacement–Double-Hung

These instructions apply to:

Pella® 150 Series 2020 - Current
ThermaStar by Pella® 2003 - 01/2022
Encompass by Pella® 02/2008 - Current
Centera by Pella™ 02/2007 - 2011
Pella® 250 Series 01/2014 - Current

Tools Required:


- Utility knife

NOTE: Pella® 250 Series weatherstrip is black in color.


1 Replacing Screen Bugstrip (Mohair):

A. Remove the screen from the window. See supporting documents–***Half Screen Replacement***–in PERL.

B. Starting at one corner, lift up the bugstrip and remove. Be sure to clean off any adhesive residue from the screen frame before applying replacement bugstrip.

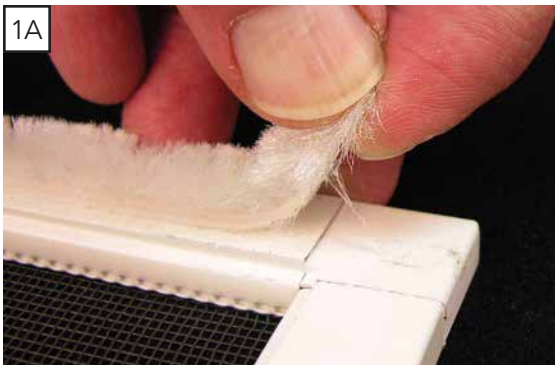

C. Remove adhesive release paper from back of replacement bugstrip. Place bugstrip on the screen check rail in the same location from which the previous piece was removed. Be sure to center it along the length of the rail.

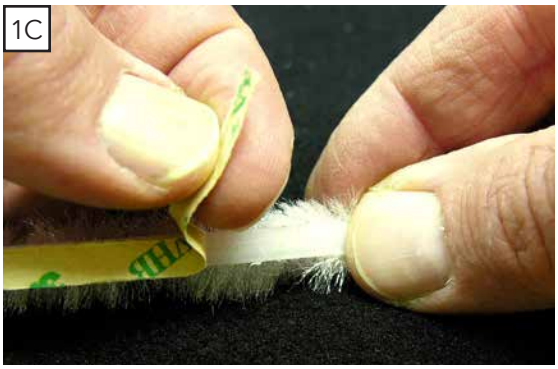

D. Cut the bugstrip to length.



E. Reinstall the screen. See supporting documents–***Half Screen Replacement***–in PERL.

©2020 Pella Corporation