Adding a Ramp to Casement Windows

Service Instruction

These instructions apply to:

Pella® 250 Series Casement 4/2018 - Current

Tools Required:

- Powered driver with a Phillips bit

Note: Remember to work safely while doing any maintenance or repair. This includes wearing safety glasses and using safe work practices. Make sure your work area is unobstructed and clear of window coverings, etc.

1 Casement Ramp Installation:


A. Remove the screen by disengaging the screen clips and lifting out of the frame. Unlock sash and open to its fully open position.





B. Measure 2” from the lock jamb and place a mark on the sill.



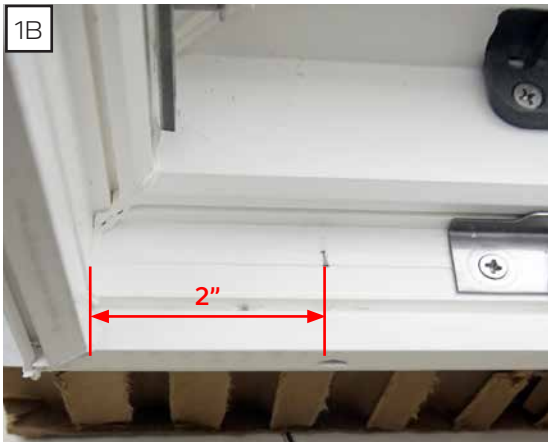


© 2023 Pella Corporation

GIF-000002870- Part Number: V989289

1 Casement Ramp Installation (continued):

C. Position the ramp with the tall side against the frame and the edge aligned with the 2" mark as shown. Make sure the ramp's thinner edge is toward the exterior.



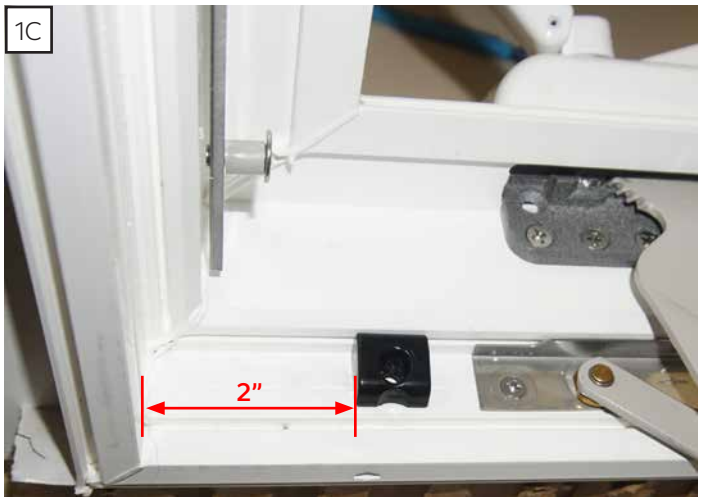

D. Attach with the provided screw.

NOTE: DO NOT overtighten screw.





E. Crank window closed, fold down crank and engage lock. Install the screen and engage the screen clips.





© 2023 Pella Corporation