Hinged Door Panel Replacement

SERVICE INSTRUCTION

These instructions apply to:

Vinyl Hinged Door 05/2024 - Current

Tools Required:


- Suction cups


1 Panel Removal:

A. Open the panel until it clears the frame then lift the panel from the hinges. Using suction cups is recommended. Place the panel in a safe location.





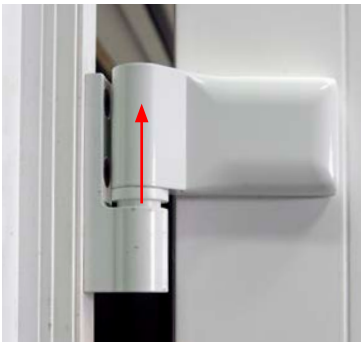

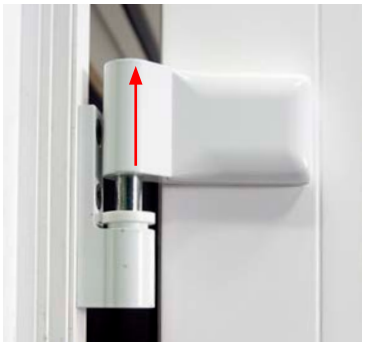

Top Hinge






Bottom Hinge


© 2026

GIF-000003014-1 Part Number: V989716

2 Panel Installation:

A. Install the panel by aligning the panel hinge pins with the frame hinge mounts and lower the panel onto the frame hinge mounts. Using suction cups is recommended.

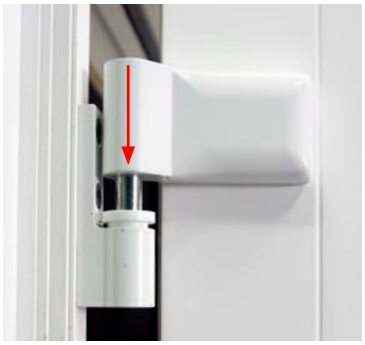

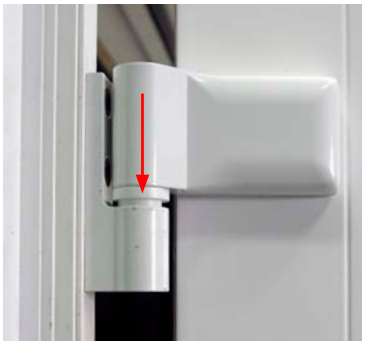

Top Hinge





Bottom Hinge





B. Close and lock the door panel and check the reveals.

If any panel adjustments are needed; see Supporting Documents – ***Hinge Door Side-to-Side Adjustment or Hinge Door Height Adjustment.***