VINYL WINDOWS AND DOORS

Manufactured by Pella Corporation

Questions? Call 1 (800) 374-4758

SERVICE INSTRUCTION

Anti-Lift Clip Replacement — Sliding Windows



Possible clip profiles


Tools Required:


- Flat blade screwdriver


Note: Remember to work safely while doing any maintenance or repair. This includes wearing safety glasses and using safe work practices. Make sure your work area is unobstructed and clear of window coverings, etc..

1 Anti-Lift Clip Replacement:


A. Unlock the window and slide the operating sash to the fully open position to access the anti-lift clips. Anti-lift clips are installed in the head (top) of the frame above the operating sash.

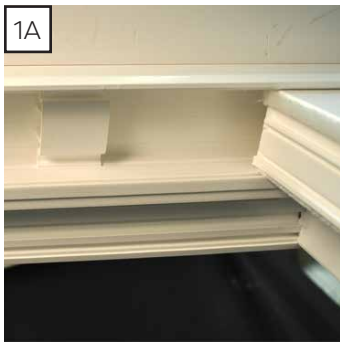


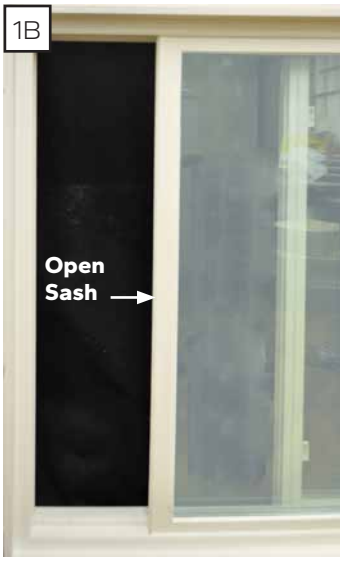

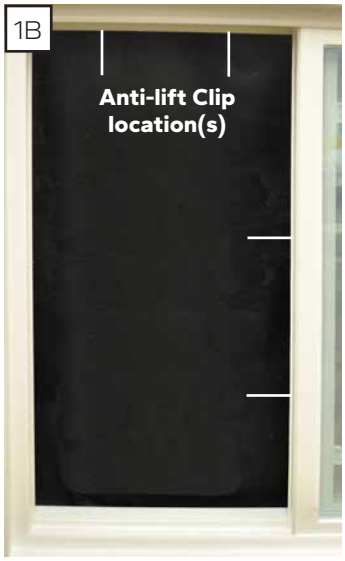


B. Grasp and pull the anti-lift clip(s) from the frame. If needed, a flat blade screwdriver may be used to pry the clip(s) from the frame.

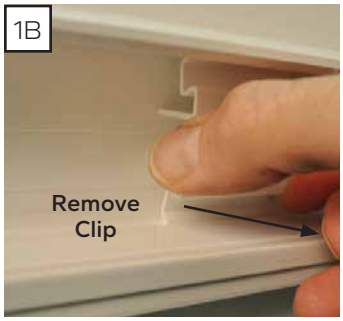


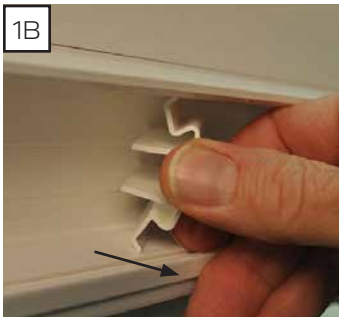




C. Insert the clip into the head (top) with the flat surface oriented down. Press clip until it snaps into place.

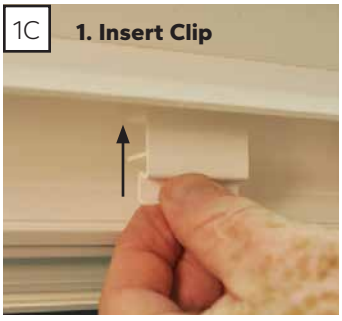

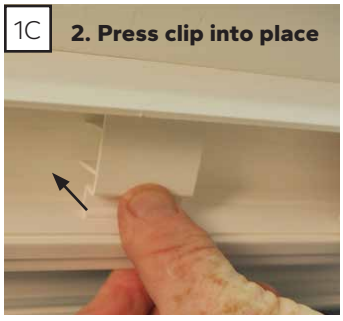

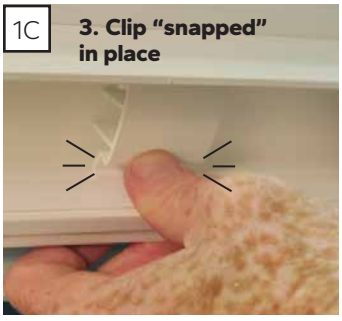



D. Close the operating sash and lock the window.

Note: If the clip(s) block sash travel, make sure clips are completely seated in the frame.

© 2025 Pella Corporation

GIF-000003083- Part Number: V985116