Sliding Patio Door Panel Track Replacement

SERVICE INSTRUCTION

03/2026-Current

Tools Required:

- Channel locks
- Rag (optional)
- Mallet
- Block of wood


NOTE: Sliding patio door track replacement requires removing the vent panel(s) before replacing the track and reinstalling it afterward. For detailed panel removal steps, please refer to the ***Vent Panel Replacement*** on the product website.

1 Track Removal:

A. **Grasp and remove the door panel bumper** from the fixed jamb side of the sill track.



B. **Use Channel lock pliers to grasp the raised section of the sliding patio door track** (where the panel rollers sit). If reusing the sill track, place a rag over it before gripping to prevent damage.

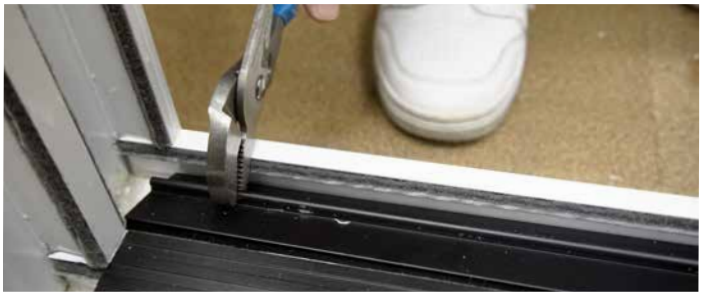


C. **Carefully tilt the track towards the interior** to free one edge from the door frame to free one edge from the door frame.



D. **Once one corner is free,** work down the length of the track, gently pulling it loose from the frame until fully removed.



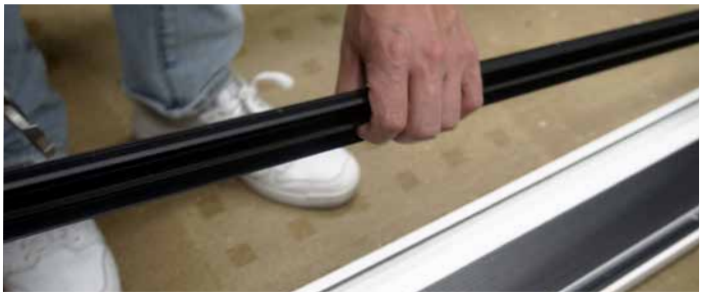

© 2026

GIF-000003120- Part Number: V990528

2 Track Installation:

A. **Insert the track into the sill channel**.



B. **Start at one end and insert the corner first.** Make sure the track is centered on the sill.

Work along the length of the track, pressing down firmly until it snaps into place.



C. **Once the track is fully seated in the sill channel,** check to make sure it is completely snapped in and secure along its entire length. It may be necessary to use a mallet and block of wood to tap the track down along the length of the track until it is fully seated in the sill.







D. **Reinstall the sill track bumper.**



