SERVICE INSTRUCTION

2 and 3-Wide Single-Hung & Fixed Pocket Cover Replacement

These instructions apply to:
Pella® 250 Series 2014–Current

Tools Required:
- Flat Blade Screwdriver

Supplies Needed:
- Pocket Service Package

1 Pocket Cover Replacement:


A. Remove pocket cover by prying it out of the channel pocket.





B. Insert pocket cover into pocket.

C. Press pocket cover until it "snaps" into place.

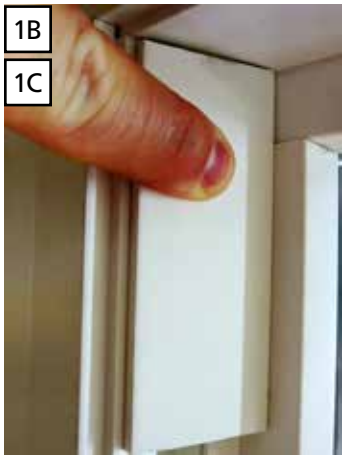

© 2013 Pella Corporation

Part Number: V985125