Product Selection Guide
- Size and Performance Data AL-MSD-2
- Features and Options AL-MSD-3

Glazing Performance AL-MSD-4
Grilles AL-MSD-8
Size Tables
- One-Panel AL-MSD-9
- Two-Panel AL-MSD-11
- Three-Panel AL-MSD-18
- Four-Panel AL-MSD-23
- Five-Panel AL-MSD-35
- Six-Panel AL-MSD-41
- Eight-Panel AL-MSD-57
- Ten-Panel AL-MSD-67

Design Data AL-MSD-78
Detailed Product Description AL-MSD-82
Unit Sections
- Frame Types Overview AL-MSD-83
- Glazing Beads AL-MSD-84
- One-way Stacking AL-MSD-85
- Bi-parting stacking AL-MSD-87
- One-way Pocket AL-MSD-88
- T-Track Sill AL-MSD-89

Document Navigation Tips:

Items listed in the table of contents above are active links that will take you to the corresponding page.

The Pella logo on each page is a link back to this table of contents.

Bookmarks are also included in this PDF document and are available as an additional navigation option.

The information published in this document is believed to be accurate at the time of publication. However, because we are constantly working to improve our products, specifications are subject to change without notice. Consult your local sales representative for regional availability and up-to-date product information.

Vista Series Premium Aluminum Multi-Slide Doors

Size and Performance Data

	Multi-slide Door 2.5" Sill Riser
Sizes	
Standard Sizes[1]	S
Special Sizes Available Built on 1/8" Increments	O
Frames	
Nail Fin - 1-1/16" setback	S
Block Frame	O
Performance[2]	
Meets or Exceeds AAMA/WDMA Ratings	LC-PG35-SD
Air Infiltration[4] (cfm/ft^2 of frame @ 1.57 psf wind pressure)	0.30 psf
Design Pressure (psf)	+/-35
Water Resistance (psf)	5.25 psf
Forced Entry[3]	10
FPAS	48021

S = Standard; O = Optional; (—) = Not Available

(1) See size charts in this section for available sizes.

(2) Published performance data is for units with Integral Nail Fin, Multi-slide door 4-Panel Stacking Single direction. Performance dependent upon using appropriate glazing, sill riser and Interlocker options, contact your local Pella representative for complete information.

(3) The higher the level, the greater the product's ability to resist forced entry.

The presence of low-E or argon have negligible effect on sound attenuation characteristics.

Performance with additional options may not be the same as Standard and Special size units. Please contact your local Pella representative for complete information.

Features and Options

	Multi-Slide Doors
Glazing	
Glazing Type	
Dual-pane insulating glass	S
Triple-pane insulating glass	O
Insulated Glass Options / Low-E Types	
Advanced Low-E	S
NaturalSun Low-E	O
NaturalSun+ Low-E	O
SunDefense	O
SunDefense+	O
SunDefense Laminated	O
Insulated Low-E 240	O
Insulated Low-E 340	O
Triple Insulated Low-E	O
Triple Insulated LE 272 / Clear / LE 272	O
Triple Insulated LE 272 / Clear / LE i89	O
Advanced Low-E Triple	O
SunDefense Triple	O
ES - SunDefense Triple	O
ES - Triple Low-E Insulating Glass	O
ES - Triple Insulated LE 272 / Clear / LE 272	O
ES - Triple Insulated LE 272 / Clear / LE i89	O
ES - Advanced Low-E Triple	O
ES - SunDefense+ Triple	O
ES - Triple Insulated LE 366 / Clear / LE 180	O
Additional Glazing Options	
Tempered Glass	S
Laminated	O
Gas Fill / High Altitude	
Argon	S
High altitude	O
Glazing Profile	
Square exterior glazing bead	S
Beveled	O
Narrow	O

	Multi-Slide Doors
Interior/Exterior Color	
6 Standard Anodized Colors[2]	S
71 Standard Paint Colors[3]	S
Custom Paint Colors[3]	O
Grilles	
Simulated -Divided-Light Grille Profiles	
Exterior 7/8" Flat	O
Interior 7/8" Flat	O
Grilles-Between-the-Glass	
5/8" Flat	O
11/16" Contoured	O
Grille Patterns	
Traditional	O
9-Lite Prairie	O
6-Lite Prairie	O
Top Row	O
Custom	O
Hardware	
Flush Style Handle	S
Keyed Random or Keyed Alike	O
Hardware Finishes	
Black	S
Additional Interior Finishes: Satin Nickel, Rustic Bronze	O

S = Standard; O = Optional

(1) Not available with triple-pane glazing.

(2) Anodized Finish is AAMA 611 Class 1.

(3) Standard and Custom Paint are 2605 Classified.

Glazing Performance - Total Unit

Glazing Thickness	Type of Glazing	NFRC Certified Product #	Performance Values[1]				Shaded Areas Meet ENERGY STAR® Performance Criteria in Zones Shown					
			U-Factor	SHGC	VLT	CR	U. S.				Canada[2]	
							Zone				ER	Zone
1" Dual-Pane Insulating Glass - No Grilles							N	NC	SC	S		CA
1"	Advanced Low-E	WEA-N-337-00067-00001	0.36	0.31	0.53	51						
1"	Advanced Low-E w/Argon	WEA-N-337-00083-00001	0.33	0.31	0.53	53						
1"	NaturalSun Low-E	WEA-N-337-00073-00001	0.37	0.49	0.58	50						
1"	NaturalSun Low-E w/Argon	WEA-N-337-00089-00001	0.34	0.49	0.58	53						
1"	NaturalSun+ Low-E	WEA-N-337-00075-00001	0.31	0.44	0.57	41						
1"	NaturalSun+ Low-E w/Argon	WEA-N-337-00091-00001	0.29	0.44	0.57	44						
1"	SunDefense Low-E	WEA-N-337-00069-00001	0.36	0.21	0.48	51						
1"	SunDefense Low-E w/Argon	WEA-N-337-00085-00001	0.32	0.21	0.48	53						
1"	SunDefense+ Low-E	WEA-N-337-00071-00001	0.31	0.21	0.46	42						
1"	SunDefense+ Low-E w/Argon	WEA-N-337-00087-00001	0.28	0.21	0.46	44			SC	S		
1"	SunDefense Lami 0.030	WEA-N-337-00133-00001	0.36	0.21	0.48	51						
1"	SunDefense Lami 0.030 w/Argon	WEA-N-337-00149-00001	0.32	0.21	0.48	53						
1"	SunDefense Lami 0.060	WEA-N-337-00143-00001	0.35	0.21	0.47	51						
1"	SunDefense Lami 0.060 w/Argon	WEA-N-337-00159-00001	0.32	0.21	0.47	53						
1"	Insulated Low-E 240	WEA-N-337-00077-00001	0.36	0.19	0.28	51						
1"	Insulated Low-E 240 w/Argon	WEA-N-337-00093-00001	0.33	0.19	0.28	53						
1"	Insulated Low-E 340	WEA-N-337-00079-00001	0.36	0.15	0.29	51						
1"	Insulated Low-E 340 w/Argon	WEA-N-337-00095-00001	0.33	0.14	0.29	53						

R-Value = 1/U-Factor
SHGC = Solar Heat Gain Coefficient
VLT % = Visible Light Transmission
CR = Condensation Resistance
ER = Canadian Energy Rating

(1) Glazing performance values are calculated based on NFRC 100, NFRC 200 and NFRC 500. ENERGY STAR® values are updated to 2023 (Version 7) criteria.

(2) The values shown are based on Canada's updated ENERGY STAR® 2020 initiative.

Visit www.energystar.gov for Energy Star guidelines.

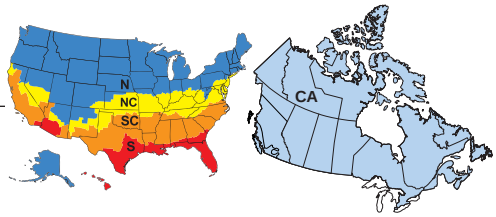

Glazing Performance - Total Unit

Glazing Thickness	Type of Glazing	NFRC Certified Product #	Performance Values[1]				Shaded Areas Meet ENERGY STAR® Performance Criteria in Zones Shown					
			U-Factor	SHGC	VLT	CR	U. S. Zone				Canada[2] ER	Canada[2] Zone
1" Triple-Pane Insulating Glass - No Grilles							N	NC	SC	S		CA
1"	SunDefense Triple	WEA-N-337-00017-00001	0.30	0.20	0.39	57						
1"	SunDefense Triple w/Argon	WEA-N-337-00021-00001	0.26	0.19	0.39	59	N	NC	SC	S		
1-9/16" Triple-Pane Insulating Glass - No Grilles												
1-9/16"	ES - SunDefense Triple	WEA-N-337-00208-00001	0.25	0.19	0.38	60	N	NC	SC	S		
1-9/16"	ES - SunDefense Triple w/Argon	WEA-N-337-00216-00001	0.23	0.19	0.38	60	N	NC	SC	S		
1-9/16"	ES - Triple Insulated Low-e	WEA-N-337-00201-00001	0.30	0.29	0.49	56						
1-9/16"	ES - Triple Insulated Low-e w/Argon	WEA-N-337-00209-00001	0.28	0.29	0.49	58						
1-9/16"	ES - Triple Insulated LE 272 / Clear / LE 272	WEA-N-337-00202-00001	0.26	0.27	0.42	60	N	NC				
1-9/16"	ES - Triple Insulated LE 272 / Clear / LE 272 w/Argon	WEA-N-337-00210-00001	0.23	0.26	0.42	60	N	NC				
1-9/16"	ES - Triple Insulated LE 272 / Clear / LE i89	WEA-N-337-00204-00001	0.27	0.28	0.47	47						
1-9/16"	ES - Triple Insulated LE 272 / Clear / LE i89 w/Argon	WEA-N-337-00212-00001	0.25	0.28	0.47	49	N	NC				
1-9/16"	ES - Advanced Low-e Triple	WEA-N-337-00203-00001	0.26	0.28	0.47	60	N	NC				
1-9/16"	ES - Advanced Low-e Triple w/Argon	WEA-N-337-00211-00001	0.24	0.28	0.47	60	N	NC				
1-9/16"	ES - SunDefense+ Triple	WEA-N-337-00207-00001	0.27	0.19	0.43	47			SC	S		
1-9/16"	ES - SunDefense+ Triple w/Argon	WEA-N-337-00215-00001	0.25	0.19	0.43	49	N	NC	SC	S		
1-9/16"	ES - Triple Insulated LE 366 / Clear / LE 180	WEA-N-337-00206-00001	0.26	0.19	0.42	60	N	NC	SC	S		
1-9/16"	ES - Triple Insulated LE 366 / Clear / LE 180 w/Argon	WEA-N-337-00214-00001	0.23	0.19	0.42	60	N	NC	SC	S		

R-Value = 1/U-Factor
SHGC = Solar Heat Gain Coefficient
VLT % = Visible Light Transmission
CR = Condensation Resistance
ER = Canadian Energy Rating

(1) Glazing performance values are calculated based on NFRC 100, NFRC 200 and NFRC 500. ENERGY STAR® values are updated to 2023 (Version 7) criteria.

(2) The values shown are based on Canada's updated ENERGY STAR® 2020 initiative.

Visit www.energystar.gov for Energy Star guidelines.

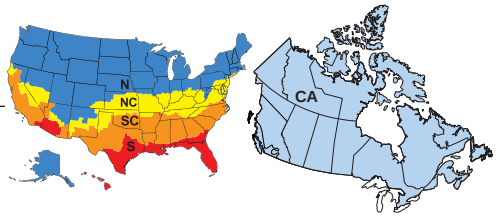

Glazing Performance - Total Unit

Glazing Thickness	Type of Glazing	NFRC Certified Product #	Performance Values[1]				Shaded Areas Meet ENERGY STAR® Performance Criteria in Zones Shown					
			U-Factor	SHGC	VLT	CR	U. S.				Canada[2]	
							Zone				ER	Zone
1" Dual-Pane Insulating Glass - With Grilles							N	NC	SC	S		CA
1"	Advanced Low-E	WEA-N-337-00067-00002	0.36	0.27	0.46	51						
1"	Advanced Low-E w/Argon	WEA-N-337-00083-00002	0.33	0.27	0.46	53						
1"	NaturalSun Low-E	WEA-N-337-00073-00002	0.37	0.43	0.51	50						
1"	NaturalSun Low-E w/Argon	WEA-N-337-00089-00002	0.34	0.43	0.51	53						
1"	NaturalSun+ Low-E	WEA-N-337-00075-00002	0.31	0.39	0.50	41						
1"	NaturalSun+ Low-E w/Argon	WEA-N-337-00091-00002	0.29	0.39	0.50	44						
1"	SunDefense Low-E	WEA-N-337-00069-00002	0.36	0.19	0.42	51						
1"	SunDefense Low-E w/Argon	WEA-N-337-00085-00002	0.32	0.19	0.42	53						
1"	SunDefense+ Low-E	WEA-N-337-00071-00002	0.31	0.19	0.41	42						
1"	SunDefense+ Low-E w/Argon	WEA-N-337-00087-00002	0.28	0.18	0.41	44			SC	S		
1"	SunDefense Lami 0.030	WEA-N-337-00133-00002	0.36	0.19	0.42	51						
1"	SunDefense Lami 0.030 w/Argon	WEA-N-337-00149-00002	0.32	0.19	0.42	53						
1"	SunDefense Lami 0.060	WEA-N-337-00143-00002	0.35	0.19	0.41	51						
1"	SunDefense Lami 0.060 w/Argon	WEA-N-337-00159-00002	0.32	0.18	0.41	53						
1"	Insulated Low-E 240	WEA-N-337-00077-00002	0.36	0.17	0.25	51						
1"	Insulated Low-E 240 w/Argon	WEA-N-337-00093-00002	0.33	0.17	0.25	53						
1"	Insulated Low-E 340	WEA-N-337-00079-00002	0.36	0.13	0.25	51						
1"	Insulated Low-E 340 w/Argon	WEA-N-337-00095-00002	0.33	0.13	0.25	53						

R-Value = 1/U-Factor
SHGC = Solar Heat Gain Coefficient
VLT % = Visible Light Transmission
CR = Condensation Resistance
ER = Canadian Energy Rating

(1) Glazing performance values are calculated based on NFRC 100, NFRC 200 and NFRC 500. ENERGY STAR® values are updated to 2023 (Version 7) criteria.

(2) The values shown are based on Canada's updated ENERGY STAR® 2020 initiative.

Visit www.energystar.gov for Energy Star guidelines.

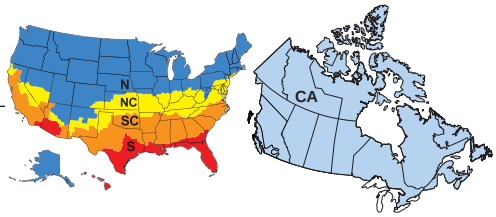

Glazing Performance - Total Unit

Glazing Thickness	Type of Glazing	NFRC Certified Product #	Performance Values[1]				Shaded Areas Meet ENERGY STAR® Performance Criteria in Zones Shown					
			U-Factor	SHGC	VLT	CR	U. S. Zone				Canada[2] ER	Canada[2] Zone
1" Triple-Pane Insulating Glass - With Grilles							N	NC	SC	S		CA
1"	SunDefense Triple	WEA-N-337-00018-00001	0.30	0.17	0.34	57						
1"	SunDefense Triple w/Argon	WEA-N-337-00022-00001	0.27	0.17	0.34	59			SC	S		
1-9/16" Triple-Pane Insulating Glass - With Grilles												
1-9/16"	ES - SunDefense Triple	WEA-N-337-00208-00002	0.25	0.17	0.33	60	N	NC	SC	S		
1-9/16"	ES - SunDefense Triple w/Argon	WEA-N-337-00216-00002	0.23	0.17	0.33	60	N	NC	SC	S		
1-9/16"	ES - Triple Insulated Low-e	WEA-N-337-00201-00002	0.30	0.26	0.42	56						
1-9/16"	ES - Triple Insulated Low-e w/Argon	WEA-N-337-00209-00002	0.28	0.25	0.42	58						
1-9/16"	ES - Triple Insulated LE 272 / Clear / LE 272	WEA-N-337-00202-00002	0.26	0.24	0.37	60	N	NC				
1-9/16"	ES - Triple Insulated LE 272 / Clear / LE 272 w/Argon	WEA-N-337-00210-00002	0.23	0.24	0.37	60	N	NC				
1-9/16"	ES - Triple Insulated LE 272 / Clear / LE i89	WEA-N-337-00204-00002	0.27	0.25	0.41	47						
1-9/16"	ES - Triple Insulated LE 272 / Clear / LE i89 w/Argon	WEA-N-337-00212-00002	0.25	0.25	0.41	49	N	NC				
1-9/16"	ES - Advanced Low-e Triple	WEA-N-337-00203-00002	0.26	0.25	0.41	60	N	NC				
1-9/16"	ES - Advanced Low-e Triple w/Argon	WEA-N-337-00211-00002	0.24	0.25	0.41	60	N	NC				
1-9/16"	ES - SunDefense+ Triple	WEA-N-337-00207-00002	0.27	0.17	0.37	47			SC	S		
1-9/16"	ES - SunDefense+ Triple w/Argon	WEA-N-337-00215-00002	0.25	0.17	0.37	49	N	NC	SC	S		
1-9/16"	ES - Triple Insulated LE 366 / Clear / LE 180	WEA-N-337-00206-00002	0.26	0.17	0.37	60	N	NC	SC	S		
1-9/16"	ES - Triple Insulated LE 366 / Clear / LE 180 w/Argon	WEA-N-337-00214-00002	0.23	0.17	0.37	60	N	NC	SC	S		

R-Value = 1/U-Factor
SHGC = Solar Heat Gain Coefficient
VLT % = Visible Light Transmission
CR = Condensation Resistance
ER = Canadian Energy Rating

(1) Glazing performance values are calculated based on NFRC 100, NFRC 200 and NFRC 500. ENERGY STAR® values are updated to 2023 (Version 7) criteria.

(2) The values shown are based on Canada's updated ENERGY STAR® 2020 initiative.

Visit www.energystar.gov for Energy Star guidelines.

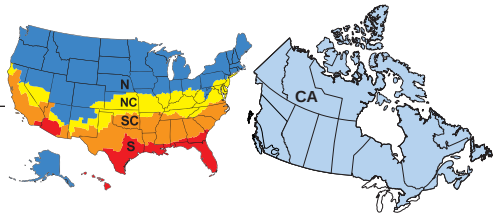

Grille Profiles

Simulated-Divided-Light Grilles

7/8" SQUARE SDL GRILLE



7/8" SQUARE SDL GRILLE TRIPLE GLAZED

7/8" SQUARE SDL GRILLE WITH NO SPACER

Grilles-Between-the-Glass

11/16" CONTOUR GBG GRILLE

5/8" FLAT GBG GRILLE

7/8" SQUARE SDL GRILLE TRIPLE GLAZED

Grille Patterns

Prairie Lite Patterns



9-Lite Prairie



6-Lite Prairie

Prairie

- Approximately 4" from edge of sash to center of bar.
- Minimum actual glass is 13".

Other Available Patterns



Traditional



Top Row

Traditional

- Specify number of lites.
- Grilles must be equally divided on visible glass.
- Minimum 6" x 6".

Top Row

- Standard visible glass to separator bar must be ≤1/2 upper actual glass.



Custom

Size Tables

Multi-Slide Doors - 2-1/4" Panel (4701) 1 Panel Pocket

Exposed Jamb Width	3'-3 9/32"	4'-3 9/32"	5'-3 9/32"	6'-3 9/32"
Exposed RO Width	3'-3 15/16"	4'-3 15/16"	5'-3 15/16"	6'-3 15/16"
Pocket Width	3'-3 3/4"	4'-3 3/4"	5'-3 3/4"	6'-3 3/4"
Jamb Dimension	6'-6 23/32"	8'-6 23/32"	10'-6 23/32"	12'-6 23/32"
Rough Opening	6'-7 23/32"	8'-7 23/32"	10'-7 23/32"	12'-7 23/32"
Soft Metric R.O. (mm)	2025	2634	3244	3854
Glass Size	31 1/4"	43 1/4"	55 1/4"	67 1/4"

Pocket Depth - 6"

Note: for motorized doors add 20" to rough opening

6'-7 21/32"	6'-8 5/32"	2036	71 9/16"	1P-3068	1P-4068	1P-5068	1P-6068
6'-10 5/32"	6'-10 21/32"	2099	74 1/16"	1P-30610	1P-40610	1P-50610	1P-60610
7'-2 5/32"	7'-2 21/32"	2201	78 1/16"	1P-3072	1P-4072	1P-5072	1P-6072
8'-0 5/32"	8'-0 21/32"	2455	88 1/16"	1P-3080	1P-4080	1P-5080	1P-6080
8'-2 5/32"	8'-2 21/32"	2506	90 1/16"	1P-3082	1P-4082	1P-5082	1P-6082
9'-0 5/32"	9'-0 21/32"	2760	100 1/16"	1P-3090	1P-4090	1P-5090	1P-6090
10'-0 5/32"	10'-0 21/32"	3065	112 1/16"	1P-30100	1P-40100	1P-50100	1P-60100

1L shown; 1R available

Not to scale.

Size Tables

Multi-Slide Doors - 2-1/4" Panel (4701) 1 Panel Pocket

Exposed Jamb Width	3'-3 9/32"	4'-3 9/32"	5'-3 9/32"	6'-3 9/32"
Exposed RO Width	3'-3 15/16"	4'-3 15/16"	5'-3 15/16"	6'-3 15/16"
Pocket Width	3'-3 3/4"	4'-3 3/4"	5'-3 3/4"	6'-3 3/4"
Jamb Dimension	6'-6 23/32"	8'-6 23/32"	10'-6 23/32"	12'-6 23/32"
Rough Opening	6'-7 23/32"	8'-7 23/32"	10'-7 23/32"	12'-7 23/32"
Soft Metric R.O. (mm)	2025	2634	3244	3854
Glass Size	31 1/4"	43 1/4"	55 1/4"	67 1/4"

11'-0 5/32" | 11'-0 21/32" | 3369 | 124 1/16"

12'-0 5/32" | 12'-0 21/32" | 3674 | 136 1/16"

Pocket Depth - 6"

Note: for motorized doors add 20" to rough opening

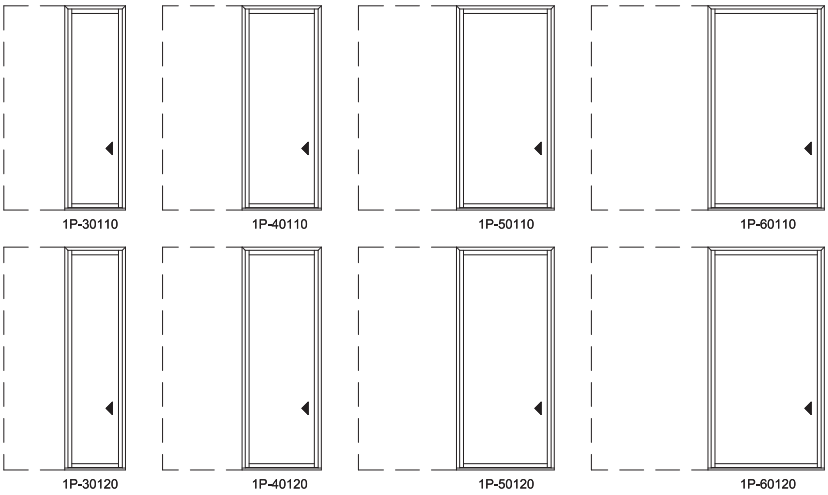

1L shown; 1R available

Not to scale.

Size Tables

Multi-Slide Doors - 2-1/4" Panel (4701) 2 Panel

Jamb Dimension	6'-0"	8'-0"	10'-0"	12'-0"
Rough Opening	6'-1"	8'-1"	10'-1"	12'-1"
Soft Metric R.O. (mm)	1854	2464	3073	3683
Glass Size	31 1/4"	43 1/4"	55 1/4"	67 1/4"

Note: for motorized doors add 20" to rough opening

6'-7 21/32"	6'-8 5/32"	2036	71 9/16"	2-3068	2-4068	2-5068	2-6068
6'-10 5/32"	6'-10 21/32"	2099	74 1/16"	2-30610	2-40610	2-50610	2-60610
7'-2 5/32"	7'-2 21/32"	2201	78 1/16"	2-3072	2-4072	2-5072	2-6072
8'-0 5/32"	8'-0 21/32"	2455	88 1/16"	2-3080	2-4080	2-5080	2-6080
8'-2 5/32"	8'-2 21/32"	2506	90 1/16"	2-3082	2-4082	2-5082	2-6082
9'-0 5/32"	9'-0 21/32"	2760	100 1/16"	2-3090	2-4090	2-5090	2-6090
10'-0 5/32"	10'-0 21/32"	3065	112 1/16"	2-30100	2-40100	2-50100	2-60100

2L shown; 2R available

Not to scale.

Size Tables

Multi-Slide Doors - 2-1/4" Panel (4701) 2 Panel

Jamb Dimension	6'-0"	8'-0"	10'-0"	12'-0"
Rough Opening	6'-1"	8'-1"	10'-1"	12'-1"
Soft Metric R.O. (mm)	1854	2464	3073	3683
Glass Size	31 1/4"	43 1/4"	55 1/4"	67 1/4"

Note: for motorized doors add 20" to rough opening

11'-0 5/32" | 11'-0 21/32" | 3369 | 124 1/16"

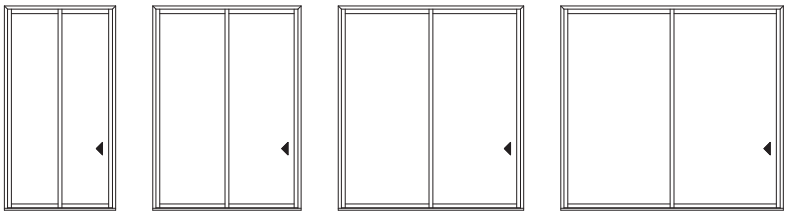

2-30110 2-40110 2-50110 2-60110

12'-0 5/32" | 12'-0 21/32" | 3674 | 136 1/16"

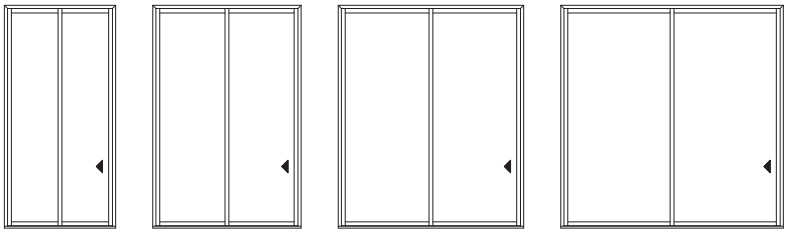

2-30120 2-40120 2-50120 2-60120

2L shown; 2R available

Not to scale.

Size Tables

Multi-Slide Doors - 2-1/4" Panel (4701) 2 Panel Pocket

Exposed Jamb Width	6'-0"	8'-0"	10'-0"	12'-0"
Exposed RO Width	6'-0 11/16"	8'-0 11/16"	10'-0 11/16"	12'-0 11/16"
Pocket Width	3'-3"	4'-3"	5'-3"	6'-3"
Jamb Dimension	9'-2 21/32"	12'-2 21/32"	15'-2 21/32"	18'-2 21/32"
Rough Opening	9'-3 21/32"	12'-3 21/32"	15'-3 21/32"	18'-3 21/32"
Soft Metric R.O. (mm)	2836	3750	4665	5579
Glass Size	31 1/4"	43 1/4"	55 1/4"	67 1/4"

Pocket Depth - 8"

Note: for motorized doors add 20" to rough opening

6'-7 21/32"	6'-8 5/32"	2036	71 9/16"	2P-3068	2P-4068	2P-5068	2P-6068
6'-10 5/32"	6'-10 21/32"	2099	74 1/16"	2P-30610	2P-40610	2P-50610	2P-60610
7'-2 5/32"	7'-2 21/32"	2201	78 1/16"	2P-3072	2P-4072	2P-5072	2P-6072
8'-0 5/32"	8'-0 21/32"	2455	88 1/16"	2P-3080	2P-4080	2P-5080	2P-6080
8'-2 5/32"	8'-2 21/32"	2506	90 1/16"	2P-3082	2P-4082	2P-5082	2P-6082
9'-0 5/32"	9'-0 21/32"	2760	100 1/16"	2P-3090	2P-4090	2P-5090	2P-6090
10'-0 5/32"	10'-0 21/32"	3065	112 1/16"	2P-30100	2P-40100	2P-50100	2P-60100

2L shown; 2R available

Not to scale.

Size Tables

Multi-Slide Doors - 2-1/4" Panel (4701) 2 Panel Pocket

Exposed Jamb Width	6'-0"	8'-0"	10'-0"	12'-0"
Exposed RO Width	6'-0 11/16"	8'-0 11/16"	10'-0 11/16"	12'-0 11/16"
Pocket Width	3'-3"	4'-3"	5'-3"	6'-3"
Jamb Dimension	9'-2 21/32"	12'-2 21/32"	15'-2 21/32"	18'-2 21/32"
Rough Opening	9'-3 21/32"	12'-3 21/32"	15'-3 21/32"	18'-3 21/32"
Soft Metric R.O. (mm)	2836	3750	4665	5579
Glass Size	31 1/4"	43 1/4"	55 1/4"	67 1/4"

Pocket Depth - 8"

Note: for motorized doors add 20" to rough opening

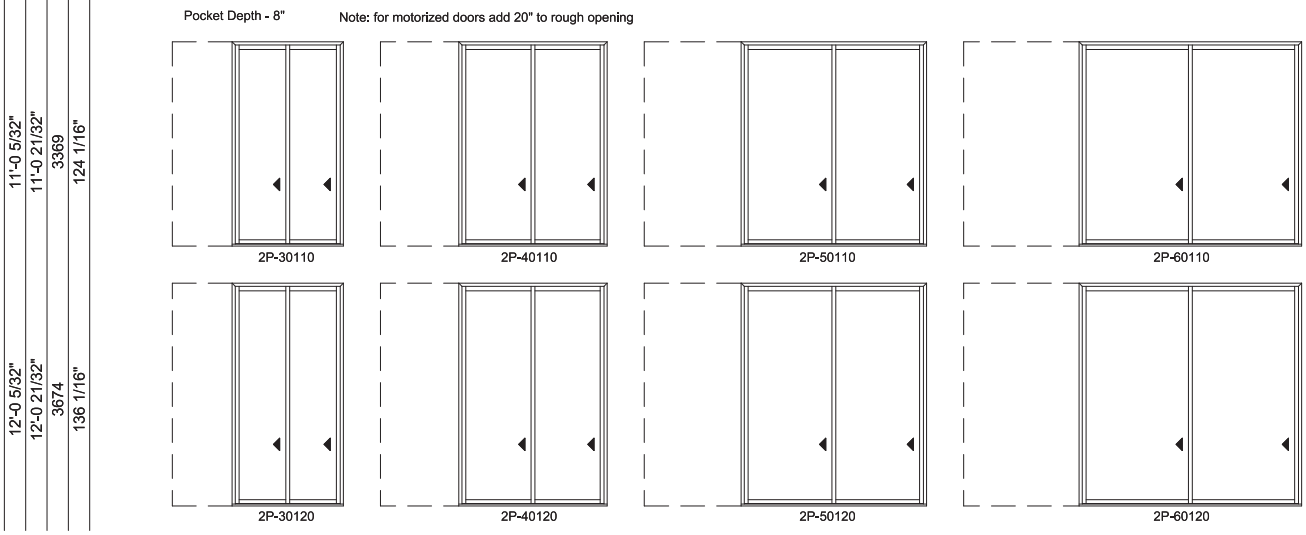

2L shown; 2R available

Not to scale.

Size Tables

Multi-Slide Doors - 2-1/4" Panel (4701) 1L1R Panel Pocket

Exposed Jamb Width	6'-4 3/8"	8'-4 3/8"	10'-4 3/8"
Exposed RO Width	6'-4 3/4"	8'-4 3/4"	10'-4 3/4"
Pocket Width	3'-3 3/4"	4'-3 3/4"	5'-3 3/4"
Jamb Dimension	12'-11 9/32"	16'-11 9/32"	20'-11 9/32"
Rough Opening	13'-0 9/32"	17'-0 9/32"	21'-0 9/32"
Soft Metric R.O. (mm)	3970	5189	6408
Glass Size	31 1/4"	43 1/4"	55 1/4"

Pocket Depth - 6"

Note: for motorized doors add 20" to rough opening

6'-7 21/32"	6'-8 5/32"	2036	71 9/16"	11P-3068	11P-4068	11P-5068
6'-10 5/32"	6'-10 21/32"	2099	74 1/16"	11P-30610	11P-40610	11P-50610
7'-2 5/32"	7'-2 21/32"	2201	78 1/16"	11P-3072	11P-4072	11P-5072
8'-0 5/32"	8'-0 21/32"	2455	88 1/16"	11P-3080	11P-4080	11P-5080
8'-2 5/32"	8'-2 21/32"	2506	90 1/16"	11P-3082	11P-4082	11P-5082
9'-0 5/32"	9'-0 21/32"	2760	100 1/16"	11P-3090	11P-4090	11P-5090
10'-0 5/32"	10'-0 21/32"	3065	112 1/16"	11P-30100	11P-40100	11P-50100

Not to scale.

Size Tables

Multi-Slide Doors - 2-1/4" Panel (4701) 1L1R Panel Pocket

Exposed Jamb Width	12'-4 3/8"
Exposed RO Width	12'-4 3/4"
Pocket Width	6'-3 3/4"
Jamb Dimension	24'-11 9/32"
Rough Opening	25'-0 9/32"
Soft Metric R.O. (mm)	7627
Glass Size	67 1/4"

Pocket Depth - 6"

Note: for motorized doors add 20" to rough opening

6'-7 21/32"	6'-8 5/32"	2036	71 9/16"	11P-6068
6'-10 5/32"	6'-10 21/32"	2099	74 1/16"	11P-60610
7'-2 5/32"	7'-2 21/32"	2201	78 1/16"	11P-6072
8'-0 5/32"	8'-0 21/32"	2455	88 1/16"	11P-6080
8'-2 5/32"	8'-2 21/32"	2506	90 1/16"	11P-6082
9'-0 5/32"	9'-0 21/32"	2760	100 1/16"	11P-6090
10'-0 5/32"	10'-0 21/32"	3065	112 1/16"	11P-60100

Not to scale.

Multi-Slide Doors - 2-1/4" Panel (4701) 1L1R Panel Pocket

Exposed Jamb Width	6'-4 3/8"	8'-4 3/8"	10'-4 3/8"
Exposed RO Width	6'-4 3/4"	8'-4 3/4"	10'-4 3/4"
Pocket Width	3'-3 3/4"	4'-3 3/4"	5'-3 3/4"
Jamb Dimension	12'-11 9/32"	16'-11 9/32"	20'-11 9/32"
Rough Opening	13'-0 9/32"	17'-0 9/32"	21'-0 9/32"
Soft Metric R.O. (mm)	3970	5189	6408
Glass Size	31 1/4"	43 1/4"	55 1/4"

11'-0 5/32" | 11'-0 21/32" | 3369 | 124 1/16"

12'-0 5/32" | 12'-0 21/32" | 3674 | 136 1/16"

Pocket Depth - 6"

Note: for motorized doors add 20" to rough opening

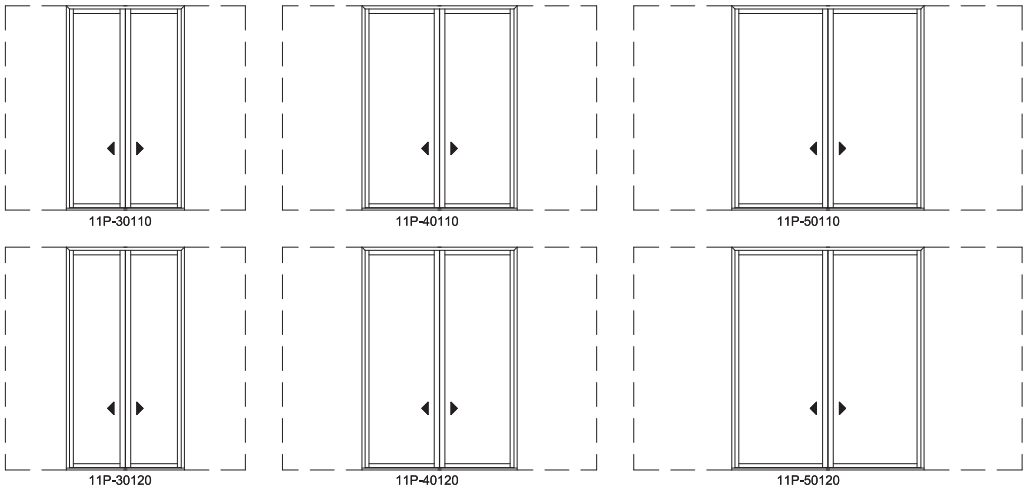

Multi-Slide Doors - 2-1/4" Panel (4701) 1L1R Panel Pocket

Exposed Jamb Width	12'-4 3/8"
Exposed RO Width	12'-4 3/4"
Pocket Width	6'-3 3/4"
Jamb Dimension	24'-11 9/32"
Rough Opening	25'-0 9/32"
Soft Metric R.O. (mm)	7627
Glass Size	67 1/4"

11'-0 5/32" | 11'-0 21/32" | 3369 | 124 1/16"

12'-0 5/32" | 12'-0 21/32" | 3674 | 136 1/16"

Pocket Depth - 6"

Note: for motorized doors add 20" to rough opening

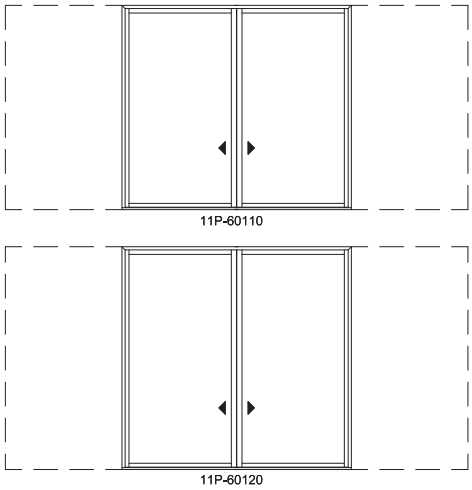

Not to scale.

Multi-Slide Doors - 2-1/4" Panel (4701) 3 Panel

Jamb Dimension	8'-8 11/16"	11'-8 11/16"	14'-8 11/16"	17'-8 11/16"
Rough Opening	8'-9 11/16"	11'-9 11/16"	14'-9 11/16"	17'-9 11/16"
Soft Metric R.O. (mm)	2684	3599	4513	5428
Glass Size	31 1/4"	43 1/4"	55 1/4"	67 1/4"

Note: for motorized doors add 20" to rough opening

6'-7 21/32"	6'-8 5/32"	2036	71 9/16"	3-3068	3-4068	3-5068	3-6068
6'-10 5/32"	6'-10 21/32"	2099	74 1/16"	3-30610	3-40610	3-50610	3-60610
7'-2 5/32"	7'-2 21/32"	2201	78 1/16"	3-3072	3-4072	3-5072	3-6072
8'-0 5/32"	8'-0 21/32"	2455	88 1/16"	3-3080	3-4080	3-5080	3-6080
8'-2 5/32"	8'-2 21/32"	2506	90 1/16"	3-3082	3-4082	3-5082	3-6082
9'-0 5/32"	9'-0 21/32"	2760	100 1/16"	3-3090	3-4090	3-5090	3-6090
10'-0 5/32"	10'-0 21/32"	3065	112 1/16"	3-30100	3-40100	3-50100	3-60100

3L shown; 3R available

Not to scale.

Size Tables

Multi-Slide Doors - 2-1/4" Panel (4701) 3 Panel

Jamb Dimension	8'-8 11/16"	11'-8 11/16"	14'-8 11/16"	17'-8 11/16"
Rough Opening	8'-9 11/16"	11'-9 11/16"	14'-9 11/16"	17'-9 11/16"
Soft Metric R.O. (mm)	2684	3599	4513	5428
Glass Size	31 1/4"	43 1/4"	55 1/4"	67 1/4"

Note: for motorized doors add 20" to rough opening

11'-0 5/32"
11'-0 21/32"
3369
124 1/16"

12'-0 5/32"
12'-0 21/32"
3674
136 1/16"

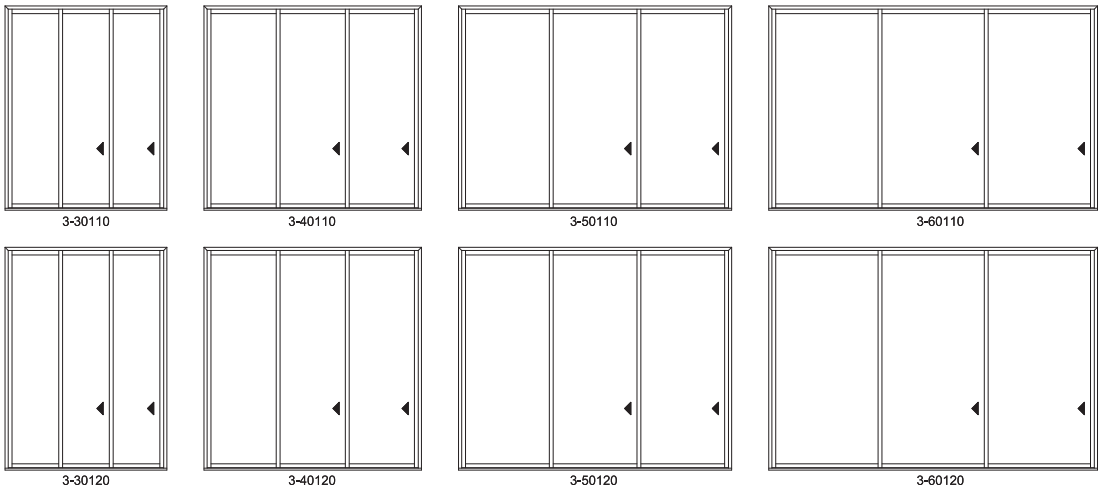

3L shown; 3R available

Not to scale.

Size Tables

Multi-Slide Doors - 2-1/4" Panel (4701) 3 Panel Pocket

Exposed Jamb Width	8'-8 23/32"	11'-8 23/32"	14'-8 23/32"
Exposed RO Width	8'-9 13/32"	11'-9 13/32"	14'-9 13/32"
Pocket Width	3'-3"	4'-3"	5'-3"
Jamb Dimension	11'-11 3/8"	15'-11 3/8"	19'-11 3/8"
Rough Opening	12'-0 3/8"	16'-0 3/8"	20'-0 3/8"
Soft Metric R.O. (mm)	3667	4886	6106
Glass Size	31 1/4"	43 1/4"	55 1/4"

Pocket Depth - 11"

Note: for motorized doors add 20" to rough opening

6'-7 21/32"	6'-8 5/32"	2036	71 9/16"	3P-3068, 3P-4068, 3P-5068
6'-10 5/32"	6'-10 21/32"	2099	74 1/16"	3P-30610, 3P-40610, 3P-50610
7'-2 5/32"	7'-2 21/32"	2201	78 1/16"	3P-3072, 3P-4072, 3P-5072
8'-0 5/32"	8'-0 21/32"	2455	88 1/16"	3P-3080, 3P-4080, 3P-5080
8'-2 5/32"	8'-2 21/32"	2506	90 1/16"	3P-3082, 3P-4082, 3P-5082
9'-0 5/32"	9'-0 21/32"	2760	100 1/16"	3P-3090, 3P-4090, 3P-5090
10'-0 5/32"	10'-0 21/32"	3065	112 1/16"	3P-30100, 3P-40100, 3P-50100

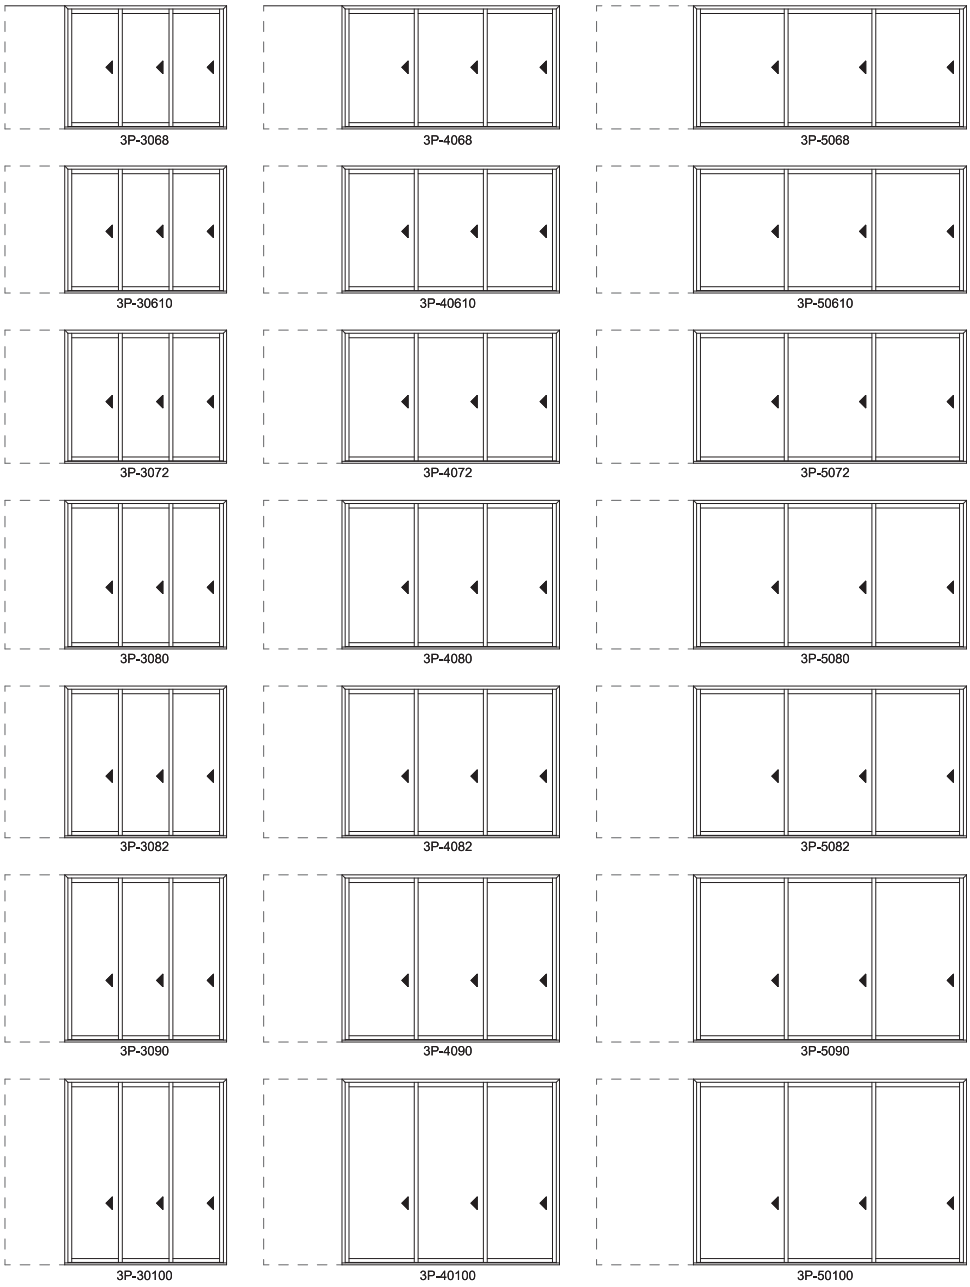

3L shown; 3R available

Not to scale.

Size Tables

Multi-Slide Doors - 2-1/4" Panel (4701) 3 Panel Pocket

Exposed Jamb Width	17'-8 23/32"
Exposed RO Width	17'-9 13/32"
Pocket Width	6'-3"
Jamb Dimension	23'-11 3/8"
Rough Opening	24'-0 3/8"
Soft Metric R.O. (mm)	7325
Glass Size	67 1/4"

Pocket Depth - 11"

Note: for motorized doors add 20" to rough opening

6'-7 21/32"	6'-10 5/32"	7'-2 5/32"	8'-0 5/32"	8'-2 5/32"	9'-0 5/32"	10'-0 5/32"
6'-8 5/32"	6'-10 21/32"	7'-2 21/32"	8'-0 21/32"	8'-2 21/32"	9'-0 21/32"	10'-0 21/32"
2036	2099	2201	2455	2506	2760	3065
71 9/16"	74 1/16"	78 1/16"	88 1/16"	90 1/16"	100 1/16"	112 1/16"

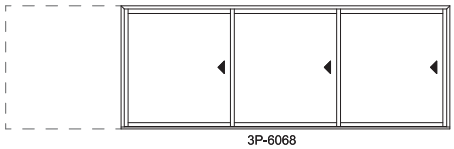

3P-6068



3P-60610



3P-6072

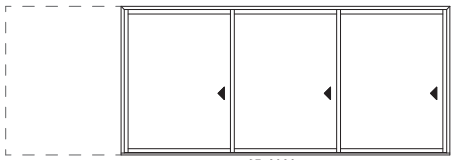

3P-6080

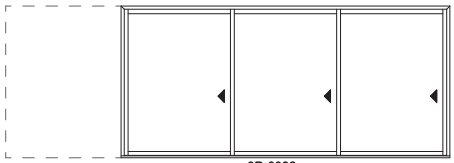

3P-6082

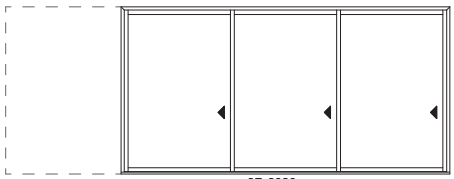

3P-6090

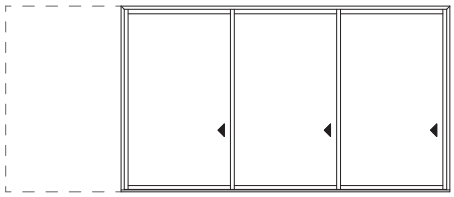

3P-60100

3L shown; 3R available

Not to scale.

Size Tables

Multi-Slide Doors - 2-1/4" Panel (4701) 3 Panel Pocket

Exposed Jamb Width	8'-8 23/32"	11'-8 23/32"	14'-8 23/32"
Exposed RO Width	8'-9 13/32"	11'-9 13/32"	14'-9 13/32"
Pocket Width	3'-3"	4'-3"	5'-3"
Jamb Dimension	11'-11 3/8"	15'-11 3/8"	19'-11 3/8"
Rough Opening	12'-0 3/8"	16'-0 3/8"	20'-0 3/8"
Soft Metric R.O. (mm)	3667	4886	6106
Glass Size	31 1/4"	43 1/4"	55 1/4"

11'-0 5/32" | 11'-0 21/32" | 3369 | 124 1/16"

12'-0 5/32" | 12'-0 21/32" | 3674 | 136 1/16"

Pocket Depth - 11"

Note: for motorized doors add 20" to rough opening

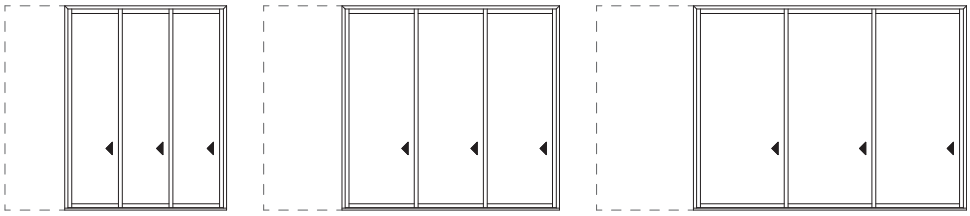

3P-30110 3P-40110 3P-50110

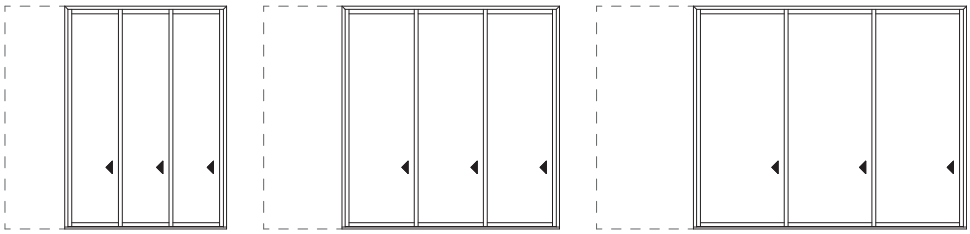

3P-30120 3P-40120 3P-50120

3L shown; 3R available

Multi-Slide Doors - 2-1/4" Panel (4701) 3 Panel Pocket

Exposed Jamb Width	17'-8 23/32"
Exposed RO Width	17'-9 13/32"
Pocket Width	6'-3"
Jamb Dimension	23'-11 3/8"
Rough Opening	24'-0 3/8"
Soft Metric R.O. (mm)	7325
Glass Size	67 1/4"

11'-0 5/32" | 11'-0 21/32" | 3369 | 124 1/16"

12'-0 5/32" | 12'-0 21/32" | 3674 | 136 1/16"

Pocket Depth - 11"

Note: for motorized doors add 20" to rough opening

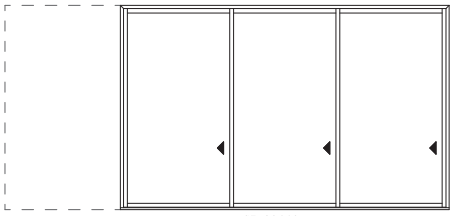

3P-60110

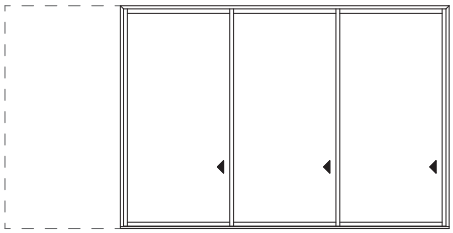

3P-60120

Not to scale.

Size Tables

Multi-Slide Doors - 2-1/4" Panel (4701) 4 Panel

Jamb Dimension	11'-5 7/16"	15'-5 7/16"	19'-5 7/16"
Rough Opening	11'-6 7/16"	15'-6 7/16"	19'-6 7/16"
Soft Metric R.O. (mm)	3516	4736	5955
Glass Size	31 1/4"	43 1/4"	55 1/4"

Note: for motorized doors add 20" to rough opening

6'-7 21/32"	6'-8 5/32"	2036	71 9/16"	4-3068	4-4068	4-5068
6'-10 5/32"	6'-10 21/32"	2099	74 1/16"	4-30610	4-40610	4-50610
7'-2 5/32"	7'-2 21/32"	2201	78 1/16"	4-3072	4-4072	4-5072
8'-0 5/32"	8'-0 21/32"	2455	88 1/16"	4-3080	4-4080	4-5080
8'-2 5/32"	8'-2 21/32"	2506	90 1/16"	4-3082	4-4082	4-5082
9'-0 5/32"	9'-0 21/32"	2760	100 1/16"	4-3090	4-4090	4-5090
10'-0 5/32"	10'-0 21/32"	3065	112 1/16"	4-30100	4-40100	4-50100

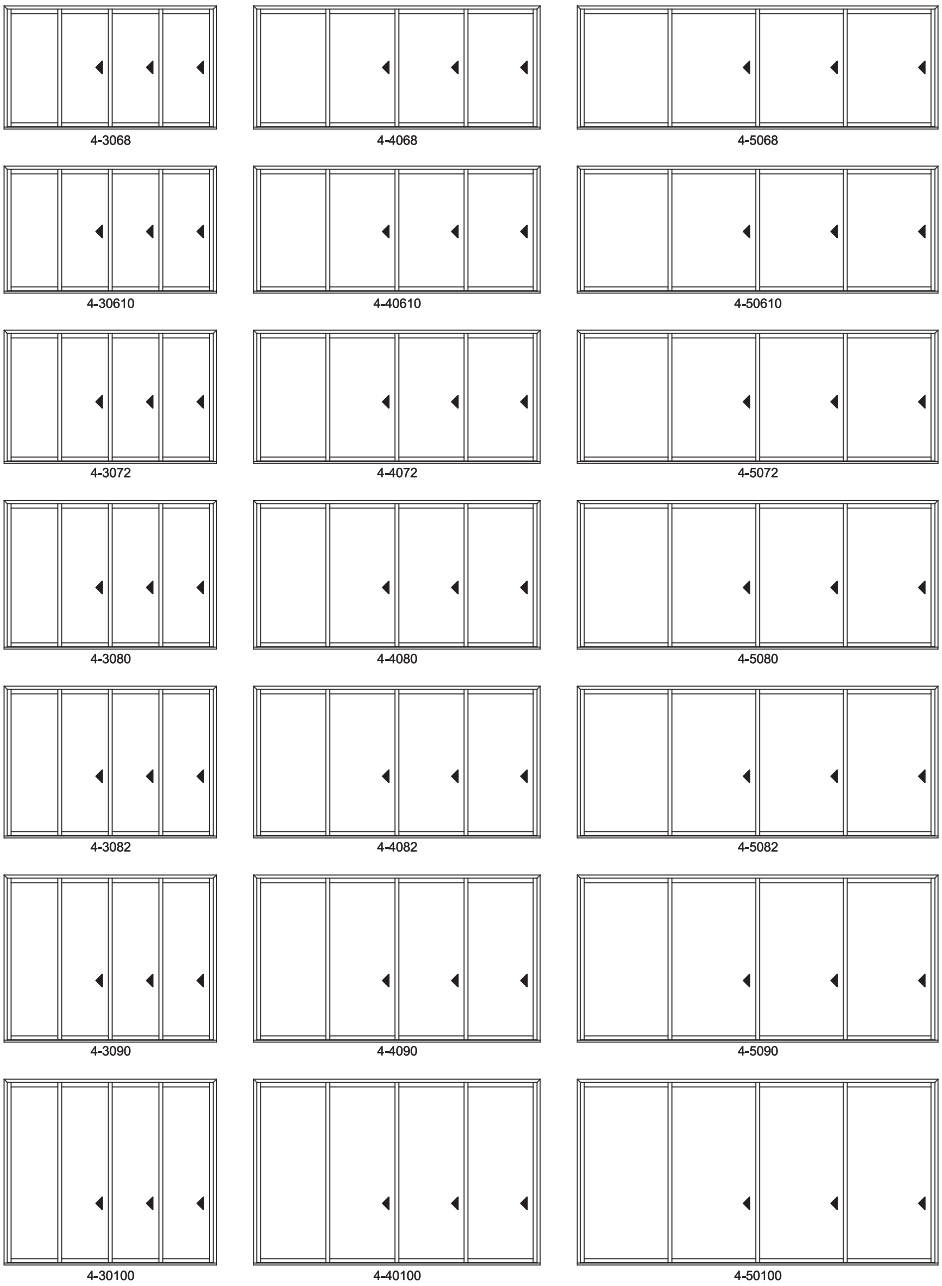

4L shown; 4R available

Not to scale.

Size Tables

Multi-Slide Doors - 2-1/4" Panel (4701) 4 Panel

Jamb Dimension	23'-5 7/16"
Rough Opening	23'-6 7/16"
Soft Metric R.O. (mm)	7174
Glass Size	67 1/4"

Note: for motorized doors add 20" to rough opening

Jamb Dimension	Rough Opening	Soft Metric R.O. (mm)	Glass Size
6'-7 21/32"	6'-8 5/32"	2036	71 9/16"
6'-10 5/32"	6'-10 21/32"	2099	74 1/16"
7'-2 5/32"	7'-2 21/32"	2201	78 1/16"
8'-0 5/32"	8'-0 21/32"	2455	88 1/16"
8'-2 5/32"	8'-2 21/32"	2506	90 1/16"
9'-0 5/32"	9'-0 21/32"	2760	100 1/16"
10'-0 5/32"	10'-0 21/32"	3065	112 1/16"



4-6068



4-60610



4-6072

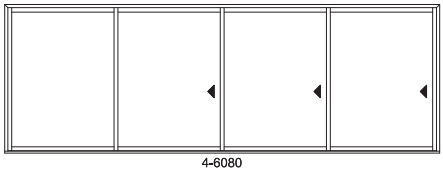

4-6080

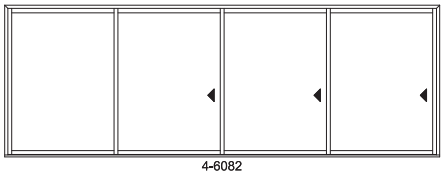

4-6082

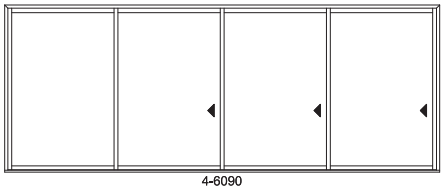

4-6090

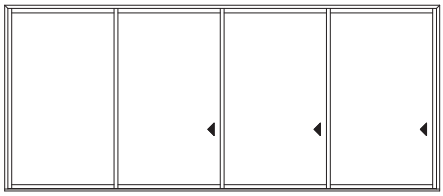

4-60100

Not to scale.

Size Tables

Multi-Slide Doors - 2-1/4" Panel (4701) 4 Panel

Jamb Dimension	11'-5 7/16"	15'-5 7/16"	19'-5 7/16"
Rough Opening	11'-6 7/16"	15'-6 7/16"	19'-6 7/16"
Soft Metric R.O. (mm)	3516	4736	5955
Glass Size	31 1/4"	43 1/4"	55 1/4"

Note: for motorized doors add 20" to rough opening

11'-0 5/32" | 11'-0 21/32" | 3369 | 124 1/16"

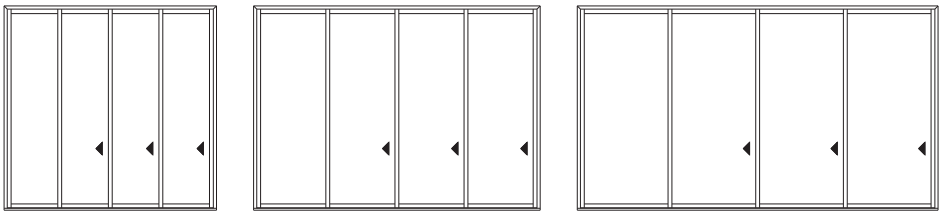

4-30110 4-40110 4-50110

12'-0 5/32" | 12'-0 21/32" | 3674 | 136 1/16"

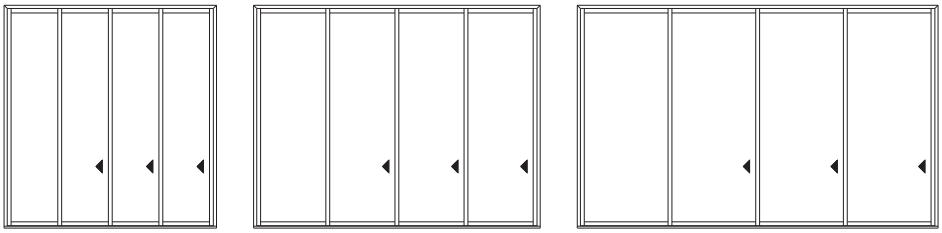

4-30120 4-40120 4-50120

4L shown; 4R available

Multi-Slide Doors - 2-1/4" Panel (4701) 4 Panel

Jamb Dimension	23'-5 7/16"
Rough Opening	23'-6 7/16"
Soft Metric R.O. (mm)	7174
Glass Size	67 1/4"

Note: for motorized doors add 20" to rough opening

11'-0 5/32" | 11'-0 21/32" | 3369 | 124 1/16"

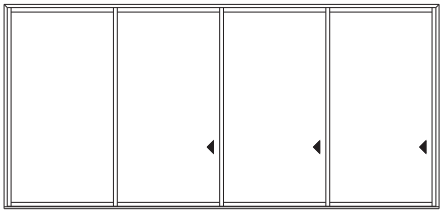

4-60110

12'-0 5/32" | 12'-0 21/32" | 3674 | 136 1/16"

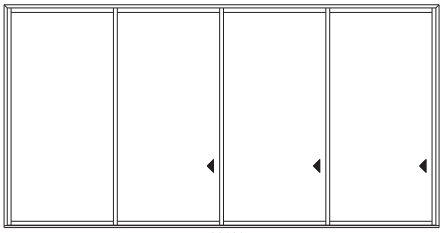

4-60120

Not to scale.

Size Tables

Multi-Slide Doors - 2-1/4" Panel (4701) 2L2R Panel

Jamb Dimension	11'-9 25/32"	15'-9 25/32"	19'-9 25/32"
Rough Opening	11'-10 25/32"	15'-10 25/32"	19'-10 25/32"
Soft Metric R.O. (mm)	3627	4846	6065
Glass Size	31 1/4"	43 1/4"	55 1/4"

Note: for motorized doors add 20" to rough opening

6'-7 21/32"	6'-8 5/32"	2036	71 9/16"	22-3068	22-4068	22-5068
6'-10 5/32"	6'-10 21/32"	2099	74 1/16"	22-30610	22-40610	22-50610
7'-2 5/32"	7'-2 21/32"	2201	78 1/16"	22-3072	22-4072	22-5072
8'-0 5/32"	8'-0 21/32"	2455	88 1/16"	22-3080	22-4080	22-5080
8'-2 5/32"	8'-2 21/32"	2506	90 1/16"	22-3082	22-4082	22-5082
9'-0 5/32"	9'-0 21/32"	2760	100 1/16"	22-3090	22-4090	22-5090
10'-0 5/32"	10'-0 21/32"	3065	112 1/16"	22-30100	22-40100	22-50100

Not to scale.

Size Tables

Multi-Slide Doors - 2-1/4" Panel (4701) 2L2R Panel

Jamb Dimension	23'-9 25/32"
Rough Opening	23'-10 25/32"
Soft Metric R.O. (mm)	7284
Glass Size	67 1/4"

Note: for motorized doors add 20" to rough opening

6'-7 21/32"	6'-8 5/32"	2036	71 9/16"
6'-10 5/32"	6'-10 21/32"	2099	74 1/16"
7'-2 5/32"	7'-2 21/32"	2201	78 1/16"
8'-0 5/32"	8'-0 21/32"	2455	88 1/16"
8'-2 5/32"	8'-2 21/32"	2506	90 1/16"
9'-0 5/32"	9'-0 21/32"	2760	100 1/16"
10'-0 5/32"	10'-0 21/32"	3065	112 1/16"



22-6068



22-60610

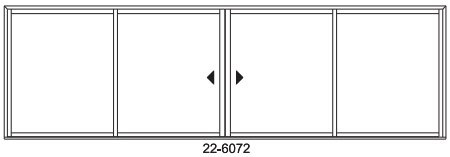

22-6072

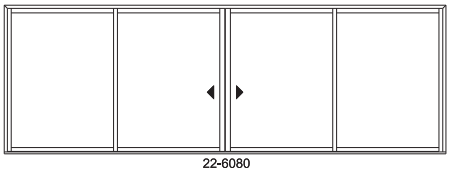

22-6080

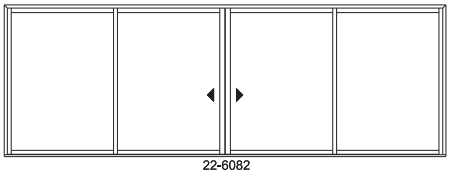

22-6082

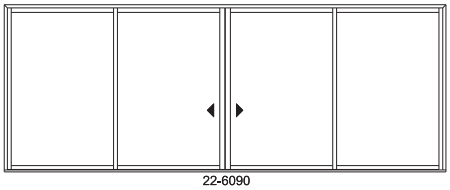

22-6090

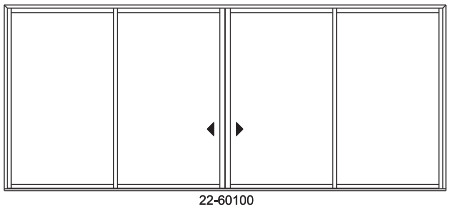

22-60100

Not to scale.

Size Tables

Multi-Slide Doors - 2-1/4" Panel (4701) 2L2R Panel

Jamb Dimension	11'-9 25/32"	15'-9 25/32"	19'-9 25/32"
Rough Opening	11'-10 25/32"	15'-10 25/32"	19'-10 25/32"
Soft Metric R.O. (mm)	3627	4846	6065
Glass Size	31 1/4"	43 1/4"	55 1/4"

Note: for motorized doors add 20" to rough opening

11'-0 5/32" | 11'-0 21/32" | 3369 | 124 1/16"

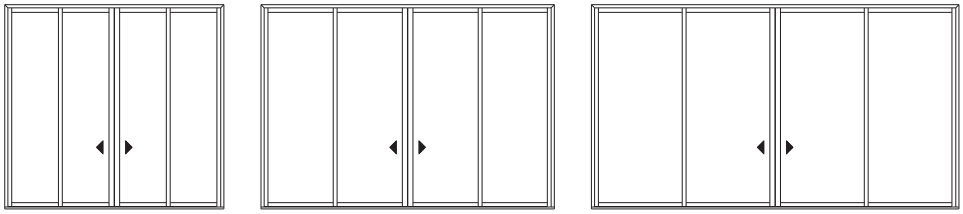

22-30110 22-40110 22-50110

12'-0 5/32" | 12'-0 21/32" | 3674 | 136 1/16"

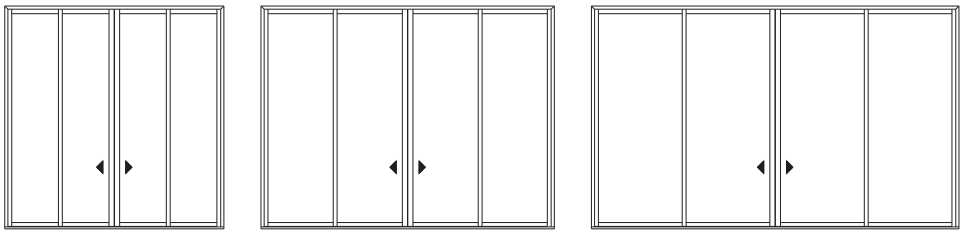

22-30120 22-40120 22-50120

Multi-Slide Doors - 2-1/4" Panel (4701) 2L2R Panel

Jamb Dimension	23'-9 25/32"
Rough Opening	23'-10 25/32"
Soft Metric R.O. (mm)	7284
Glass Size	67 1/4"

Note: for motorized doors add 20" to rough opening

11'-0 5/32" | 11'-0 21/32" | 3369 | 124 1/16"

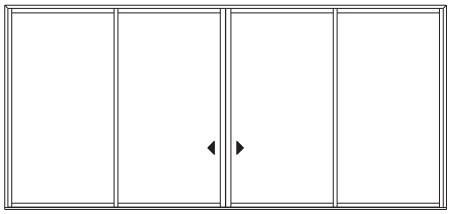

22-60110

12'-0 5/32" | 12'-0 21/32" | 3674 | 136 1/16"

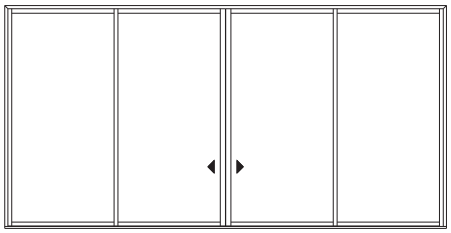

22-60120

Not to scale.

Multi-Slide Doors - 2-1/4" Panel (4701) 4 Panel Pocket

Exposed Jamb Width	11'-5 7/16"	15'-5 7/16"	19'-5 7/16"
Exposed RO Width	11'-6 1/8"	15'-6 1/8"	19'-6 1/8"
Pocket Width	3'-3"	4'-3"	5'-3"
Jamb Dimension	14'-8 3/32"	19'-8 3/32"	24'-8 3/32"
Rough Opening	14'-9 3/32"	19'-9 3/32"	24'-9 3/32"
Soft Metric R.O. (mm)	4498	6022	7546
Glass Size	31 1/4"	43 1/4"	55 1/4"

Pocket Depth - 14"

Note: for motorized doors add 20" to rough opening

6'-7 21/32"	6'-8 5/32"	2036	71 9/16"	4P-3068	4P-4068	4P-5068
6'-10 5/32"	6'-10 21/32"	2099	74 1/16"	4P-30610	4P-40610	4P-50610
7'-2 5/32"	7'-2 21/32"	2201	78 1/16"	4P-3072	4P-4072	4P-5072
8'-0 5/32"	8'-0 21/32"	2455	88 1/16"	4P-3080	4P-4080	4P-5080
8'-2 5/32"	8'-2 21/32"	2506	90 1/16"	4P-3082	4P-4082	4P-5082
9'-0 5/32"	9'-0 21/32"	2760	100 1/16"	4P-3090	4P-4090	4P-5090
10'-0 5/32"	10'-0 21/32"	3065	112 1/16"	4P-30100	4P-40100	4P-50100

4L shown; 4R available

Not to scale.

Size Tables

Multi-Slide Doors - 2-1/4" Panel (4701) 4 Panel Pocket

Exposed Jamb Width	23'-5 7/16"
Exposed RO Width	23'-6 1/8"
Pocket Width	6'-3"
Jamb Dimension	29'-8 3/32"
Rough Opening	29'-9 3/32"
Soft Metric R.O. (mm)	9070
Glass Size	67 1/4"

Pocket Depth - 14"

Note: for motorized doors add 20" to rough opening

6'-7 21/32"	6'-8 5/32"	2036	71 9/16"	4P-6068
6'-10 5/32"	6'-10 21/32"	2099	74 1/16"	4P-60610
7'-2 5/32"	7'-2 21/32"	2201	78 1/16"	4P-6072
8'-0 5/32"	8'-0 21/32"	2455	88 1/16"	4P-6080
8'-2 5/32"	8'-2 21/32"	2506	90 1/16"	4P-6082
9'-0 5/32"	9'-0 21/32"	2760	100 1/16"	4P-6090
10'-0 5/32"	10'-0 21/32"	3065	112 1/16"	4P-60100

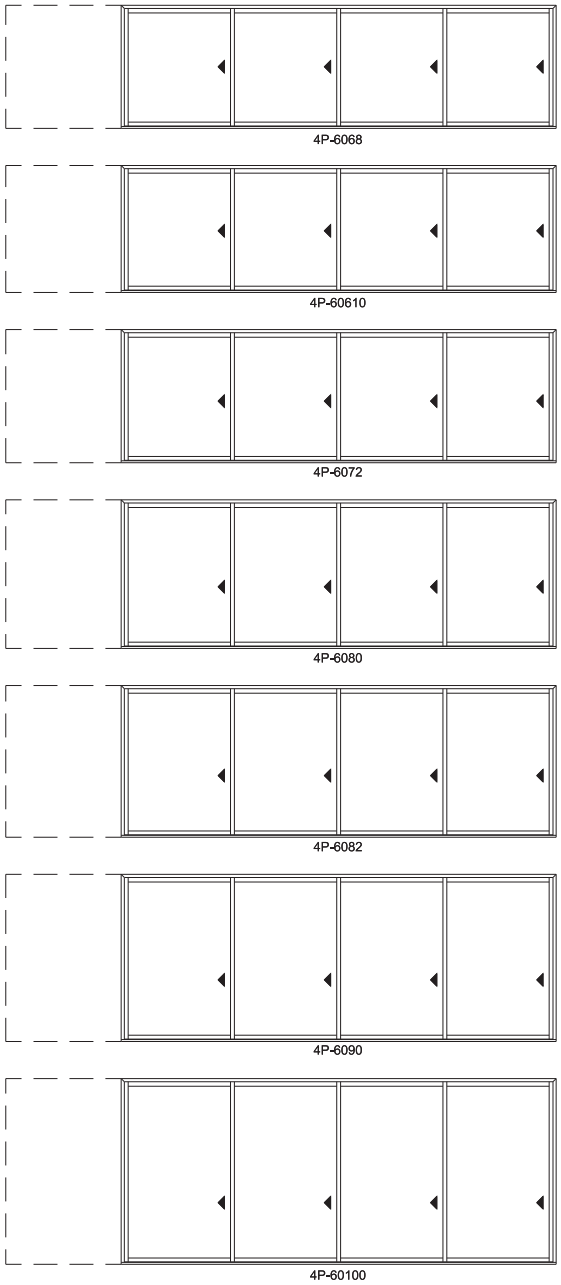

4L shown; 4R available

Not to scale.

Multi-Slide Doors - 2-1/4" Panel (4701) 4 Panel Pocket

Exposed Jamb Width	11'-5 7/16"	15'-5 7/16"	19'-5 7/16"
Exposed RO Width	11'-6 1/8"	15'-6 1/8"	19'-6 1/8"
Pocket Width	3'-3"	4'-3"	5'-3"
Jamb Dimension	14'-8 3/32"	19'-8 3/32"	24'-8 3/32"
Rough Opening	14'-9 3/32"	19'-9 3/32"	24'-9 3/32"
Soft Metric R.O. (mm)	4498	6022	7546
Glass Size	31 1/4"	43 1/4"	55 1/4"

11'-0 5/32" | 11'-0 21/32" | 3369 | 124 1/16"

12'-0 5/32" | 12'-0 21/32" | 3674 | 136 1/16"

Pocket Depth - 14"

Note: for motorized doors add 20" to rough opening

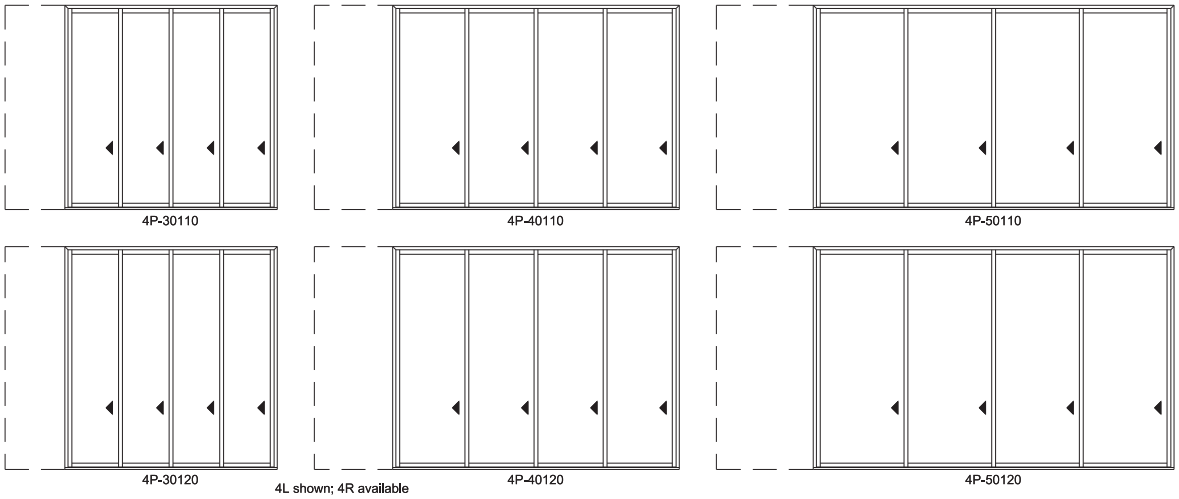

4L shown; 4R available

Multi-Slide Doors - 2-1/4" Panel (4701) 4 Panel Pocket

Exposed Jamb Width	23'-5 7/16"
Exposed RO Width	23'-6 1/8"
Pocket Width	6'-3"
Jamb Dimension	29'-8 3/32"
Rough Opening	29'-9 3/32"
Soft Metric R.O. (mm)	9070
Glass Size	67 1/4"

11'-0 5/32" | 11'-0 21/32" | 3369 | 124 1/16"

12'-0 5/32" | 12'-0 21/32" | 3674 | 136 1/16"

Pocket Depth - 14"

Note: for motorized doors add 20" to rough opening

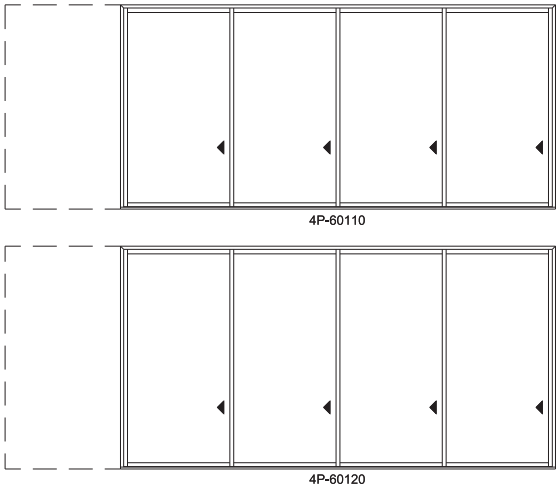

Not to scale.

Size Tables

Multi-Slide Doors - 2-1/4" Panel (4701) 2L2R Panel Pocket

Exposed Jamb Width	11'-9 25/32"	15'-9 25/32"
Exposed RO Width	11'-10 5/32"	15'-10 5/32"
Pocket Width	3'-3"	4'-3"
Jamb Dimension	18'-3 5/32"	24'-3 5/32"
Rough Opening	18'-4 5/32"	24'-4 5/32"
Soft Metric R.O. (mm)	5592	7421
Glass Size	31 1/4"	43 1/4"

Pocket Depth - 8"

Note: for motorized doors add 20" to rough opening

6'-7 21/32"	6'-8 5/32"	2036	71 9/16"	22P-3068	22P-4068
6'-10 5/32"	6'-10 21/32"	2099	74 1/16"	22P-30610	22P-40610
7'-2 5/32"	7'-2 21/32"	2201	78 1/16"	22P-3072	22P-4072
8'-0 5/32"	8'-0 21/32"	2455	88 1/16"	22P-3080	22P-4080
8'-2 5/32"	8'-2 21/32"	2506	90 1/16"	22P-3082	22P-4082
9'-0 5/32"	9'-0 21/32"	2760	100 1/16"	22P-3090	22P-4090
10'-0 5/32"	10'-0 21/32"	3065	112 1/16"	22P-30100	22P-40100

Not to scale.

Size Tables

Multi-Slide Doors - 2-1/4" Panel (4701) 2L2R Panel Pocket

Exposed Jamb Width	19'-9 25/32"	23'-9 25/32"
Exposed RO Width	19'-10 5/32"	23'-10 5/32"
Pocket Width	5'-3"	6'-3"
Jamb Dimension	30'-3 5/32"	36'-3 5/32"
Rough Opening	30'-4 5/32"	36'-4 5/32"
Soft Metric R.O. (mm)	9250	11078
Glass Size	55 1/4"	67 1/4"

Pocket Depth - 8"

Note: for motorized doors add 20" to rough opening

6'-7 21/32"	6'-8 5/32"	2036	71 9/16"	22P-5068 / 22P-6068
6'-10 5/32"	6'-10 21/32"	2099	74 1/16"	22P-50610 / 22P-60610
7'-2 5/32"	7'-2 21/32"	2201	78 1/16"	22P-5072 / 22P-6072
8'-0 5/32"	8'-0 21/32"	2455	88 1/16"	22P-5080 / 22P-6080
8'-2 5/32"	8'-2 21/32"	2506	90 1/16"	22P-5082 / 22P-6082
9'-0 5/32"	9'-0 21/32"	2760	100 1/16"	22P-5090 / 22P-6090
10'-0 5/32"	10'-0 21/32"	3065	112 1/16"	22P-50100 / 22P-60100

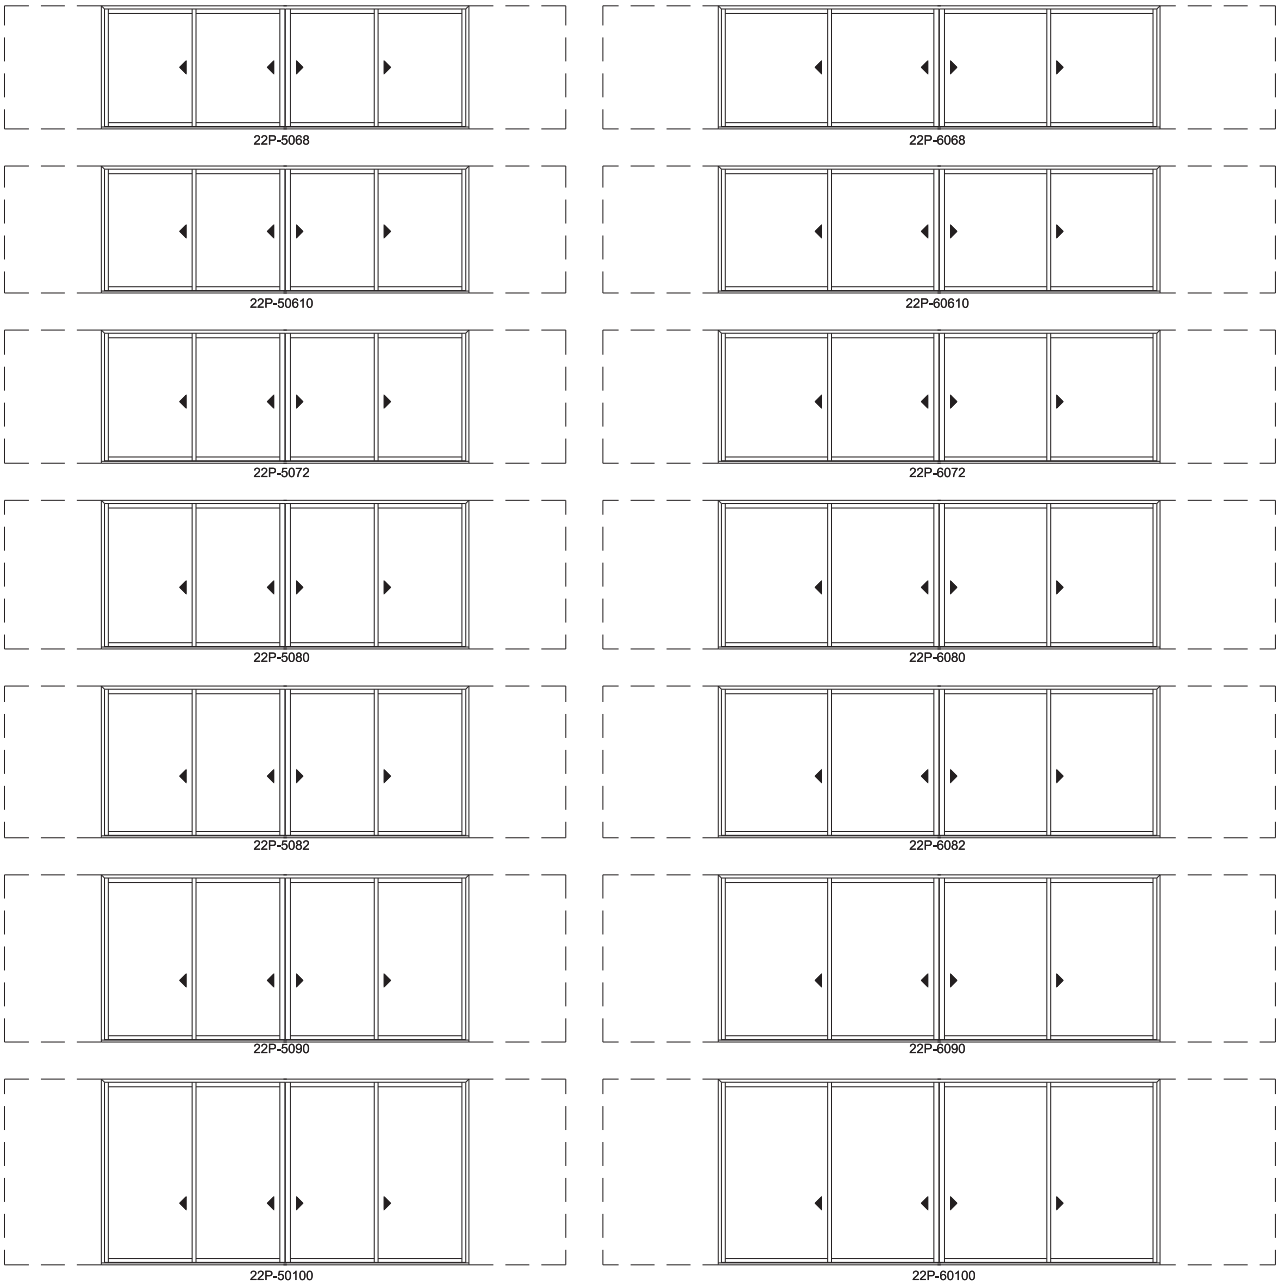

Not to scale.

Multi-Slide Doors - 2-1/4" Panel (4701) 2L2R Panel Pocket

Exposed Jamb Width	11'-9 25/32"	15'-9 25/32"
Exposed RO Width	11'-10 5/32"	15'-10 5/32"
Pocket Width	3'-3"	4'-3"
Jamb Dimension	18'-3 5/32"	24'-3 5/32"
Rough Opening	18'-4 5/32"	24'-4 5/32"
Soft Metric R.O. (mm)	5592	7421
Glass Size	31 1/4"	43 1/4"

Pocket Depth - 8"

Note: for motorized doors add 20" to rough opening

11'-0 5/32"
11'-0 21/32"
3369
124 1/16"



22P-30110

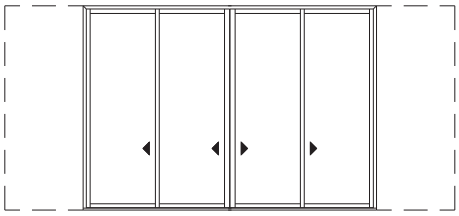

22P-40110

12'-0 5/32"
12'-0 21/32"
3674
136 1/16"



22P-30120

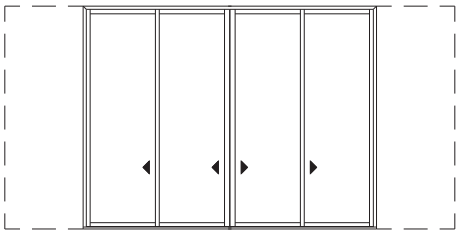

22P-40120

Multi-Slide Doors - 2-1/4" Panel (4701) 2L2R Panel Pocket

Exposed Jamb Width	19'-9 25/32"	23'-9 25/32"
Exposed RO Width	19'-10 5/32"	23'-10 5/32"
Pocket Width	5'-3"	6'-3"
Jamb Dimension	30'-3 5/32"	36'-3 5/32"
Rough Opening	30'-4 5/32"	36'-4 5/32"
Soft Metric R.O. (mm)	9250	11078
Glass Size	55 1/4"	67 1/4"

Pocket Depth - 8"

Note: for motorized doors add 20" to rough opening

11'-0 5/32"
11'-0 21/32"
3369
124 1/16"

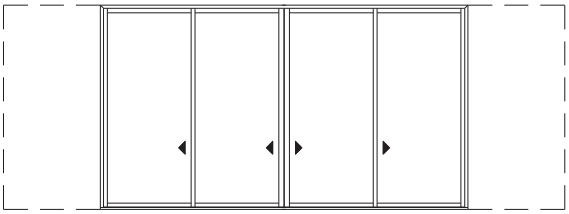

22P-50110

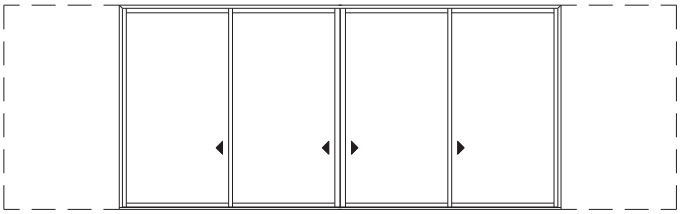

22P-60110

12'-0 5/32"
12'-0 21/32"
3674
136 1/16"

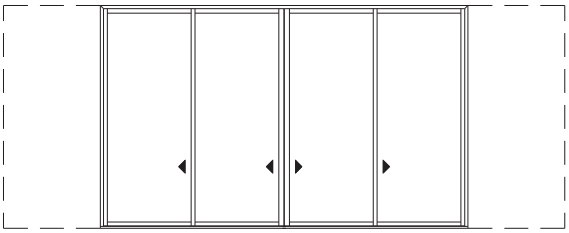

22P-50120

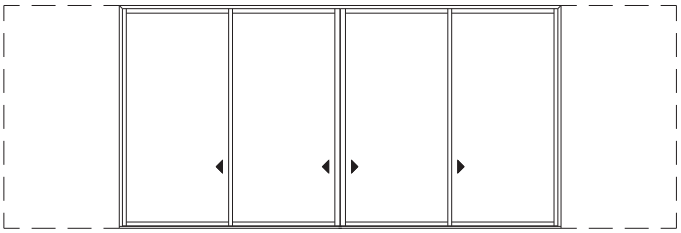

22P-60120

Not to scale.

Multi-Slide Doors - 2-1/4" Panel (4701) 5 Panel

Jamb Dimension	14'-2 1/8"	19'-2 1/8"	24'-2 1/8"
Rough Opening	14'-3 1/8"	19'-3 1/8"	24'-3 1/8"
Soft Metric R.O. (mm)	4347	5871	7395
Glass Size	31 1/4"	43 1/4"	55 1/4"

Note: for motorized doors add 20" to rough opening

6'-7 21/32"	6'-8 5/32"	2036	71 9/16"	5-3068				5-4068				5-5068
6'-10 5/32"	6'-10 21/32"	2099	74 1/16"	5-30610				5-40610				5-50610
7'-2 5/32"	7'-2 21/32"	2201	78 1/16"	5-3072				5-4072				5-5072
8'-0 5/32"	8'-0 21/32"	2455	88 1/16"	5-3080				5-4080				5-5080
8'-2 5/32"	8'-2 21/32"	2506	90 1/16"	5-3082				5-4082				5-5082
9'-0 5/32"	9'-0 21/32"	2760	100 1/16"	5-3090				5-4090				5-5082
10'-0 5/32"	10'-0 21/32"	3065	112 1/16"	5-30100				5-40100				5-50100

5L shown; 5R available

Not to scale.

Size Tables

Multi-Slide Doors - 2-1/4" Panel (4701) 5 Panel

Jamb Dimension	29'-2 1/8"
Rough Opening	29'-3 1/8"
Soft Metric R.O. (mm)	8919
Glass Size	67 1/4"

Note: for motorized doors add 20" to rough opening

6'-7 21/32"	6'-8 5/32"	2036	71 9/16"		5-6068
6'-10 5/32"	6'-10 21/32"	2099	74 1/16"		5-60610
7'-2 5/32"	7'-2 21/32"	2201	78 1/16"	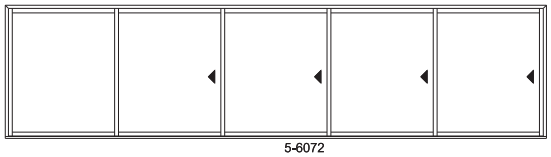	5-6072
8'-0 5/32"	8'-0 21/32"	2455	88 1/16"	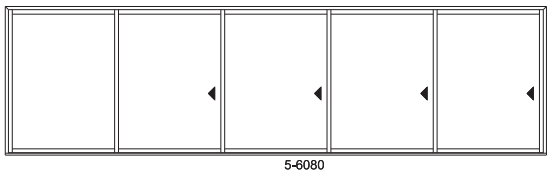	5-6080
8'-2 5/32"	8'-2 21/32"	2506	90 1/16"	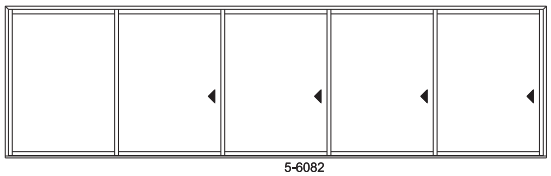	5-6082
9'-0 5/32"	9'-0 21/32"	2760	100 1/16"	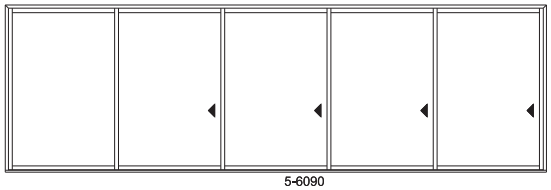	5-6090
10'-0 5/32"	10'-0 21/32"	3065	112 1/16"	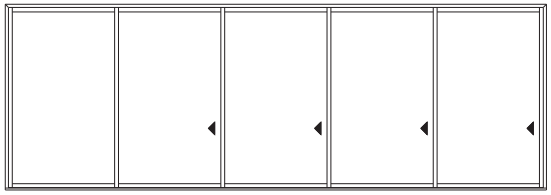	5-60100

5L shown; 5R available

Not to scale.

Multi-Slide Doors - 2-1/4" Panel (4701) 5 Panel

Jamb Dimension	14'-2 1/8"	19'-2 1/8"	24'-2 1/8"
Rough Opening	14'-3 1/8"	19'-3 1/8"	24'-3 1/8"
Soft Metric R.O. (mm)	4347	5871	7395
Glass Size	31 1/4"	43 1/4"	55 1/4"

11'-0 5/32" | 11'-0 21/32" | 3369 | 124 1/16"

12'-0 5/32" | 12'-0 21/32" | 3674 | 136 1/16"

Note: for motorized doors add 20" to rough opening

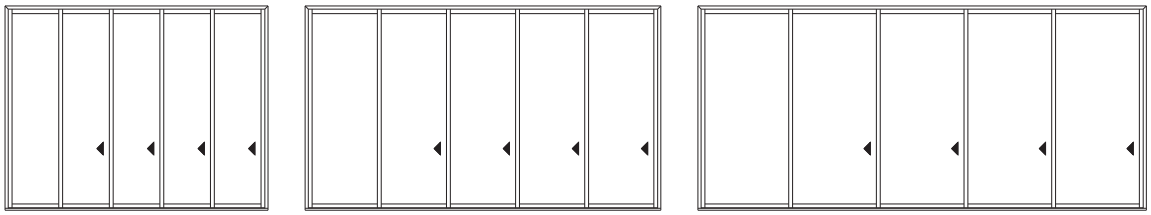

5-30110 5-40110 5-50110

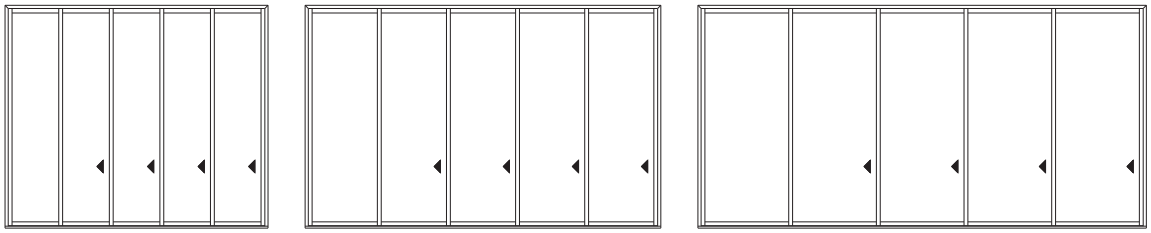

5-30120 5-40120 5-50120

5L shown; 5R available

Multi-Slide Doors - 2-1/4" Panel (4701) 5 Panel

Jamb Dimension	29'-2 1/8"
Rough Opening	29'-3 1/8"
Soft Metric R.O. (mm)	8919
Glass Size	67 1/4"

11'-0 5/32" | 11'-0 21/32" | 3369 | 124 1/16"

12'-0 5/32" | 12'-0 21/32" | 3674 | 136 1/16"

Note: for motorized doors add 20" to rough opening

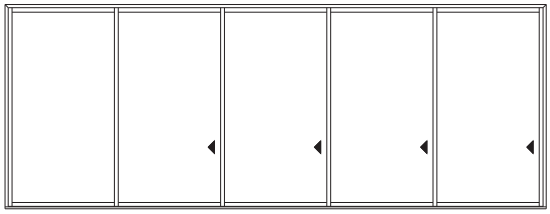

5-60110

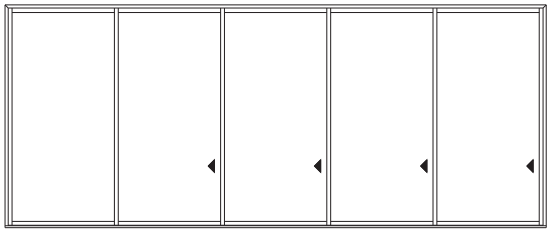

5-60120

Not to scale.

Size Tables

Multi-Slide Doors - 2-1/4" Panel (4701) 5 Panel Pocket

Exposed Jamb Width	14'-2 1/8"	19'-2 1/8"
Exposed RO Width	14'-2 13/16"	19'-2 13/16"
Pocket Width	3'-3"	4'-3"
Jamb Dimension	17'-4 13/16"	23'-4 13/16"
Rough Opening	17'-5 13/16"	23'-5 13/16"
Soft Metric R.O. (mm)	5329	7158
Glass Size	31 1/4"	43 1/4"

Pocket Depth - 17"

Note: for motorized doors add 20" to rough opening

6'-7 21/32"	6'-8 5/32"	2036	71 9/16"
6'-10 5/32"	6'-10 21/32"	2099	74 1/16"
7'-2 5/32"	7'-2 21/32"	2201	78 1/16"
8'-0 5/32"	8'-0 21/32"	2455	88 1/16"
8'-2 5/32"	8'-2 21/32"	2506	90 1/16"
9'-0 5/32"	9'-0 21/32"	2760	100 1/16"
10'-0 5/32"	10'-0 21/32"	3065	112 1/16"

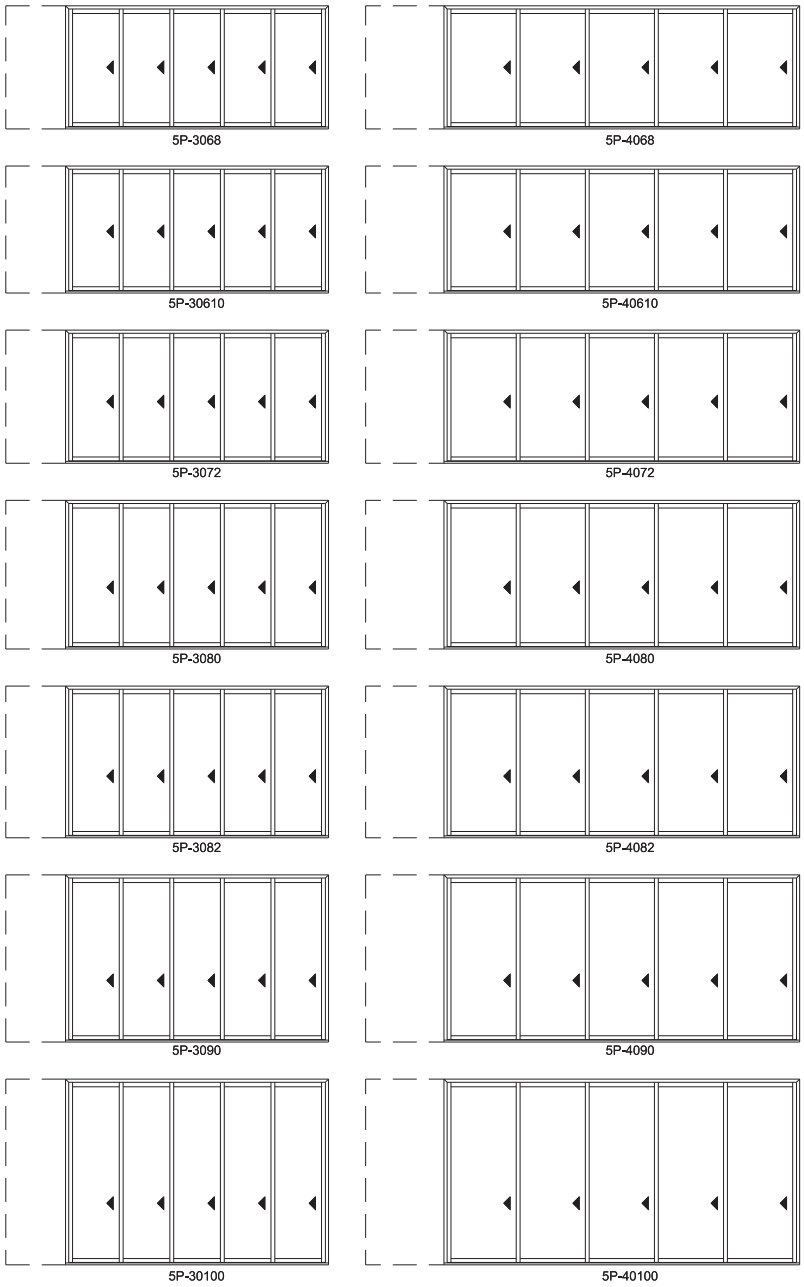

5L shown; 5R available

Not to scale.

Size Tables

Multi-Slide Doors - 2-1/4" Panel (4701) 5 Panel Pocket

Exposed Jamb Width	24'-2 1/8"	29'-2 1/8"
Exposed RO Width	24'-2 13/16"	29'-2 13/16"
Pocket Width	5'-3"	6'-3"
Jamb Dimension	29'-4 13/16"	35'-4 13/16"
Rough Opening	29'-5 13/16"	35'-5 13/16"
Soft Metric R.O. (mm)	8987	10816
Glass Size	55 1/4"	67 1/4"

Pocket Depth - 17"

Note: for motorized doors add 20" to rough opening

6'-7 21/32"	6'-8 5/32"	2036	71 9/16"
6'-10 5/32"	6'-10 21/32"	2099	74 1/16"
7'-2 5/32"	7'-2 21/32"	2201	78 1/16"
8'-0 5/32"	8'-0 21/32"	2455	88 1/16"
8'-2 5/32"	8'-2 21/32"	2506	90 1/16"
9'-0 5/32"	9'-0 21/32"	2760	100 1/16"
10'-0 5/32"	10'-0 21/32"	3065	112 1/16"

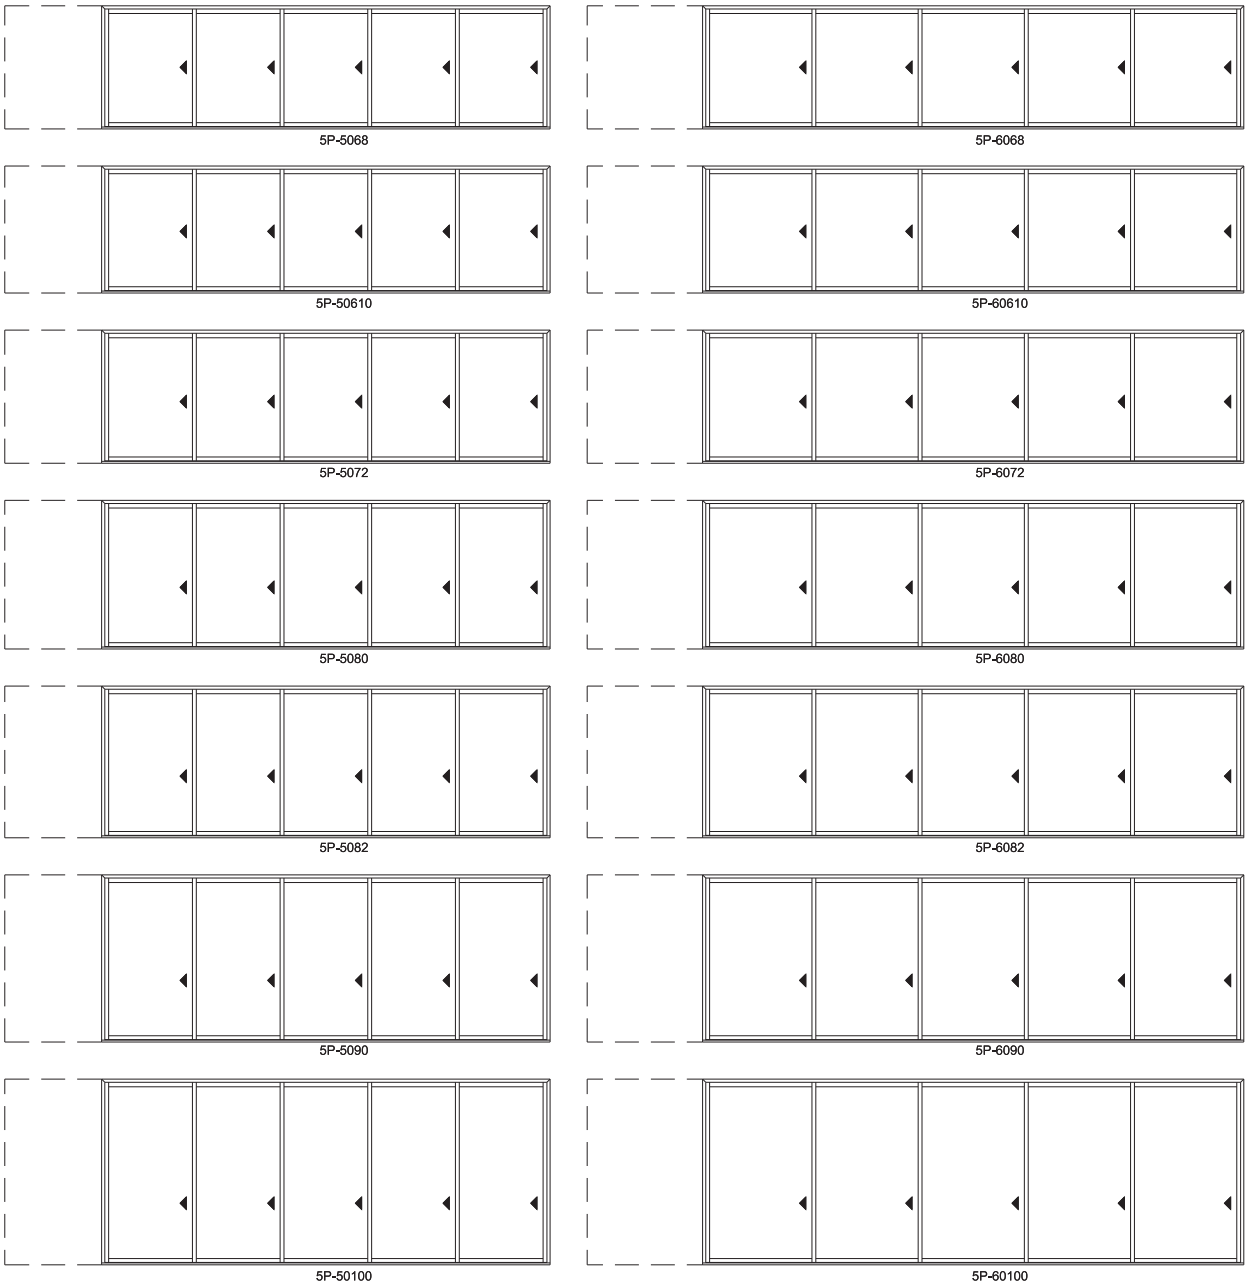

5L shown; 5R available

Not to scale.

Multi-Slide Doors - 2-1/4" Panel (4701) 5 Panel Pocket

Exposed Jamb Width	14'-2 1/8"	19'-2 1/8"
Exposed RO Width	14'-2 13/16"	19'-2 13/16"
Pocket Width	3'-3"	4'-3"
Jamb Dimension	17'-4 13/16"	23'-4 13/16"
Rough Opening	17'-5 13/16"	23'-5 13/16"
Soft Metric R.O. (mm)	5329	7158
Glass Size	31 1/4"	43 1/4"

Pocket Depth - 17"

Note: for motorized doors add 20" to rough opening

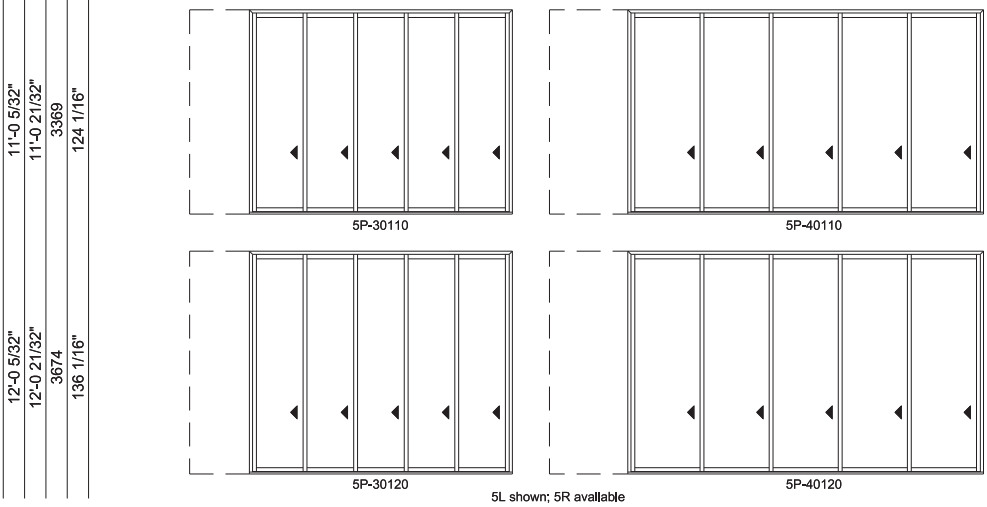

Multi-Slide Doors - 2-1/4" Panel (4701) 5 Panel Pocket

Exposed Jamb Width	24'-2 1/8"	29'-2 1/8"
Exposed RO Width	24'-2 13/16"	29'-2 13/16"
Pocket Width	5'-3"	6'-3"
Jamb Dimension	29'-4 13/16"	35'-4 13/16"
Rough Opening	29'-5 13/16"	35'-5 13/16"
Soft Metric R.O. (mm)	8987	10816
Glass Size	55 1/4"	67 1/4"

Pocket Depth - 17"

Note: for motorized doors add 20" to rough opening

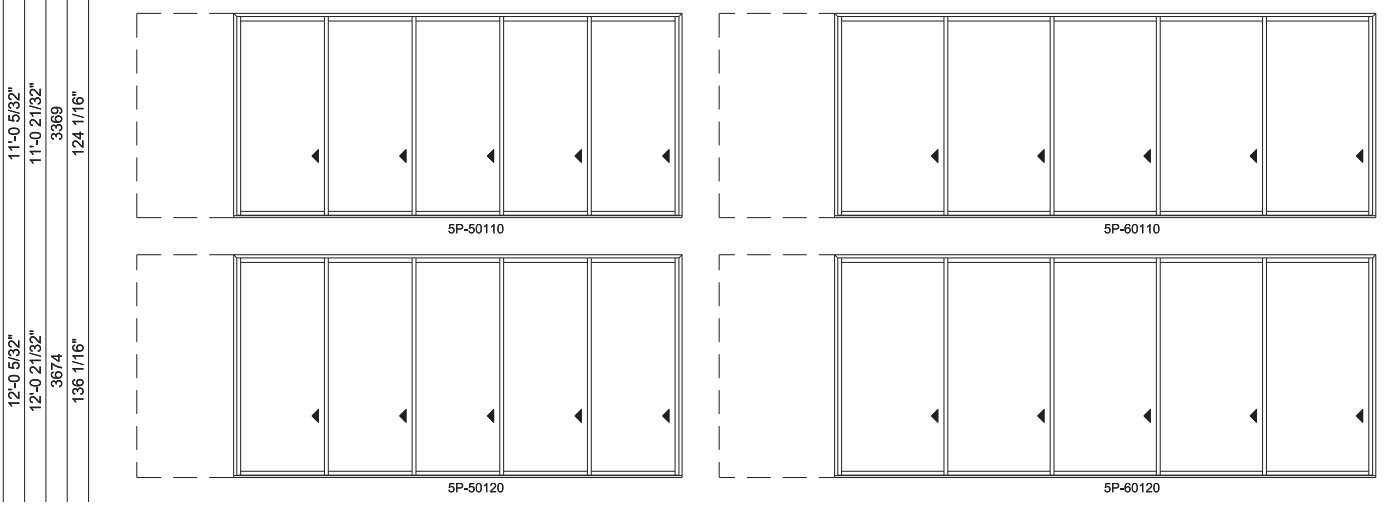

Not to scale.

Size Tables

Multi-Slide Doors - 2-1/4" Panel (4701) 6 Panel

				Jamb Dimension	16'-10 27/32"	22'-10 27/32"
				Rough Opening	16'-11 27/32"	22'-11 27/32"
				Soft Metric R.O. (mm)	5178	7006
				Glass Size	31 1/4"	43 1/4"
6'-7 21/32"	6'-8 5/32"	2036	71 9/16"			
6'-10 5/32"	6'-10 21/32"	2099	74 1/16"			
7'-2 5/32"	7'-2 21/32"	2201	78 1/16"			
8'-0 5/32"	8'-0 21/32"	2455	88 1/16"			
8'-2 5/32"	8'-2 21/32"	2506	90 1/16"			
9'-0 5/32"	9'-0 21/32"	2760	100 1/16"			
10'-0 5/32"	10'-0 21/32"	3065	112 1/16"			

Note: for motorized doors add 20" to rough opening


6-3068


6-4068


6-30610


6-40610


6-3072


6-4072


6-3080

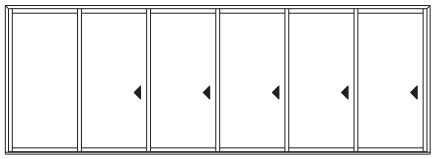
6-4080


6-3082

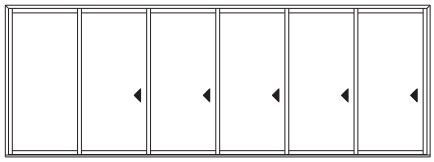
6-4082


6-3090

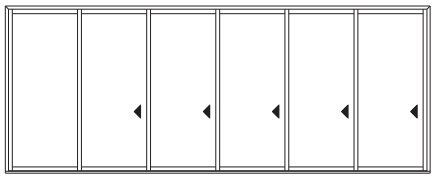
6-4090


6-30100

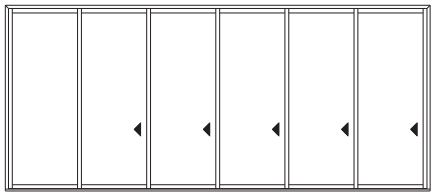
6-40100

6L shown; 6R available

Not to scale.

Multi-Slide Doors - 2-1/4" Panel (4701) 6 Panel

Jamb Dimension				28'-10 27/32"		34'-10 27/32"
	Rough Opening			28'-11 27/32"		34'-11 27/32"
		Soft Metric R.O. (mm)		8835		10664
			Glass Size	55 1/4"		67 1/4"
6'-7 21/32"	6'-8 5/32"	2036	71 9/16"	6-5068		6-6068
6'-10 5/32"	6'-10 21/32"	2099	74 1/16"	6-50610		6-60610
7'-2 5/32"	7'-2 21/32"	2201	78 1/16"	6-5072		6-6072
8'-0 5/32"	8'-0 21/32"	2455	88 1/16"	6-5080		6-6080
8'-2 5/32"	8'-2 21/32"	2506	90 1/16"	6-5082		6-6082
9'-0 5/32"	9'-0 21/32"	2760	100 1/16"	6-5090		6-6090
10'-0 5/32"	10'-0 21/32"	3065	112 1/16"	6-50100		6-60100

Note: for motorized doors add 20" to rough opening

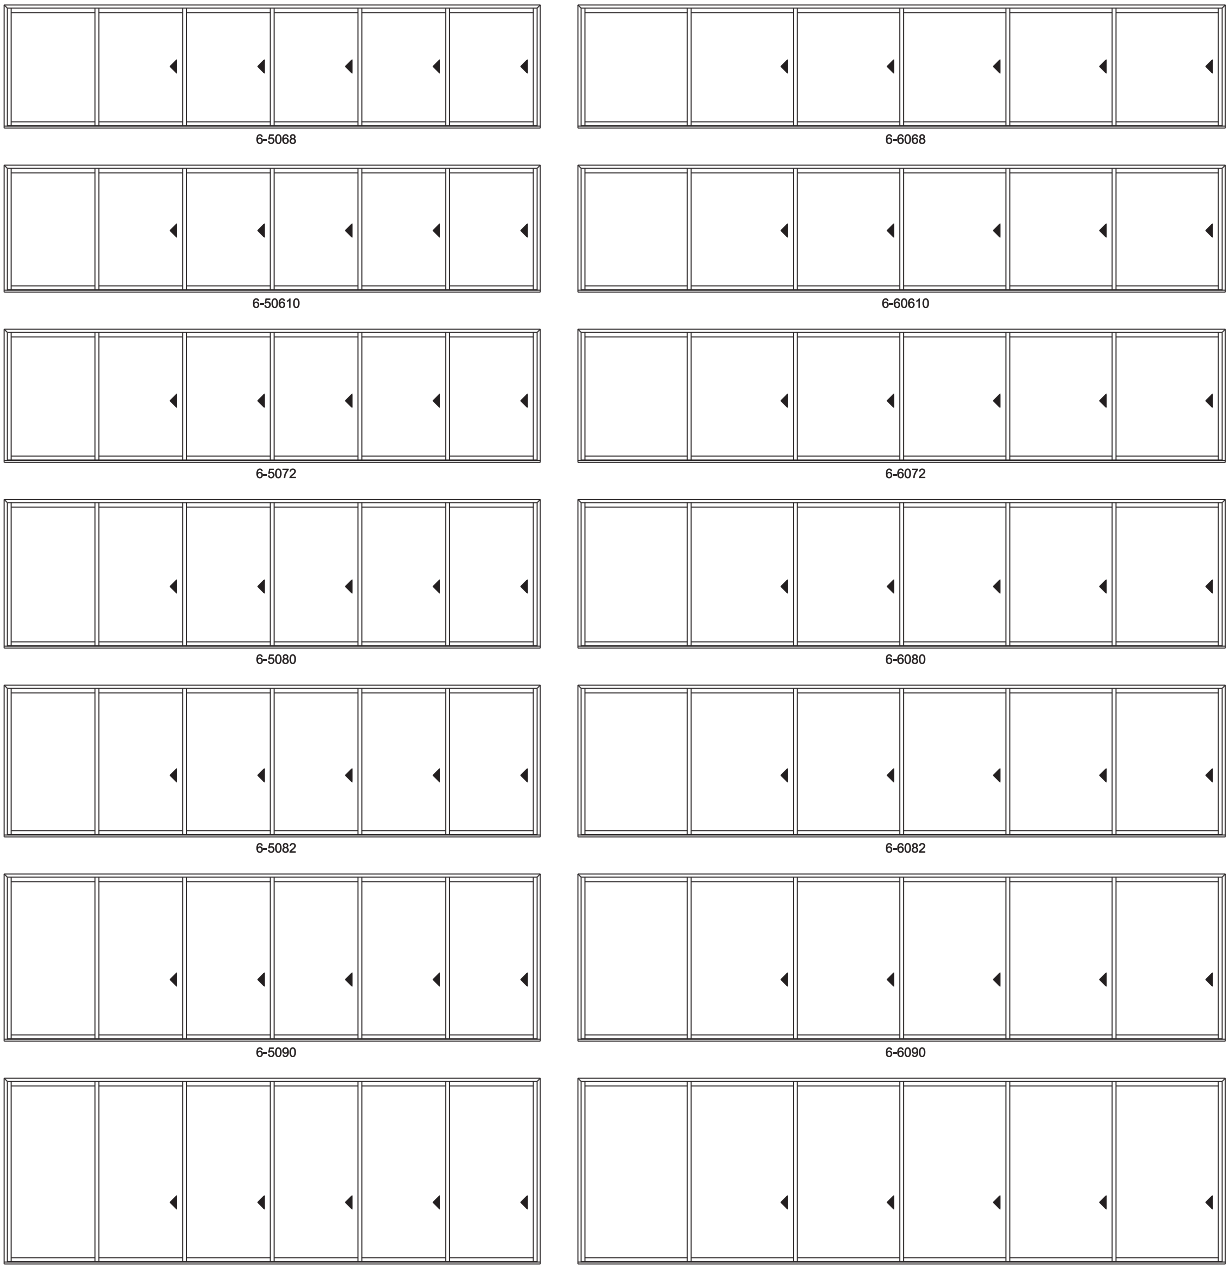

6L shown; 6R available

Not to scale.

Multi-Slide Doors - 2-1/4" Panel (4701) 6 Panel

Jamb Dimension	16'-10 27/32"	22'-10 27/32"
Rough Opening	16'-11 27/32"	22'-11 27/32"
Soft Metric R.O. (mm)	5178	7006
Glass Size	31 1/4"	43 1/4"

11'-0 5/32"
11'-0 21/32"
3369
124 1/16"
12'-0 5/32"
12'-0 21/32"
3674
136 1/16"

Note: for motorized doors add 20" to rough opening

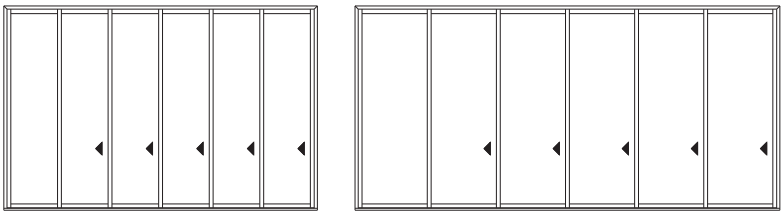

6-30110

6-40110



6-30120

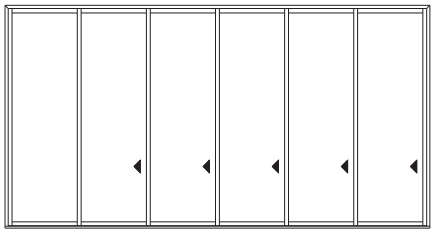

6-40120

6L shown; 6R available

Multi-Slide Doors - 2-1/4" Panel (4701) 6 Panel

Jamb Dimension	28'-10 27/32"	34'-10 27/32"
Rough Opening	28'-11 27/32"	34'-11 27/32"
Soft Metric R.O. (mm)	8835	10664
Glass Size	55 1/4"	67 1/4"

11'-0 5/32"
11'-0 21/32"
3369
124 1/16"
12'-0 5/32"
12'-0 21/32"
3674
136 1/16"

Note: for motorized doors add 20" to rough opening

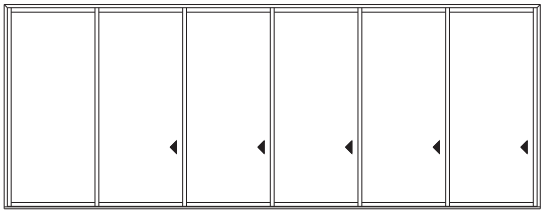

6-50110

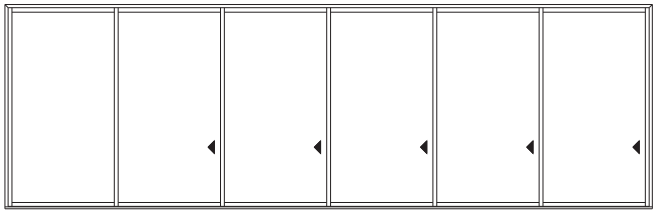

6-60110

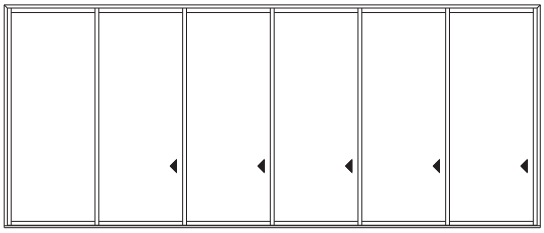

6-50120

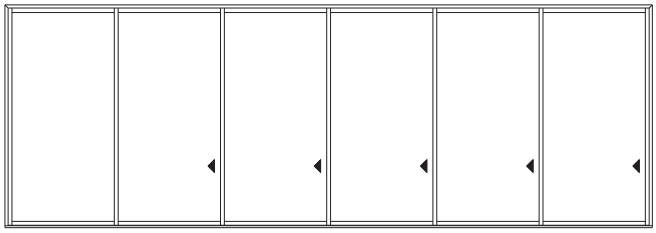

6-60120

Not to scale.

Size Tables

Multi-Slide Doors - 2-1/4" Panel (4701) 3L3R Panel

Jamb Dimension				17'-3 1/4"	23'-3 1/4"
	Rough Opening			17'-4 1/4"	23'-4 1/4"
		Soft Metric R.O. (mm)		5290	7118
			Glass Size	31 1/4"	43 1/4"
6'-7 21/32"	6'-8 5/32"	2036	71 9/16"	33-3068	33-4068
6'-10 5/32"	6'-10 21/32"	2099	74 1/16"	33-30610	33-40610
7'-2 5/32"	7'-2 21/32"	2201	78 1/16"	33-3072	33-4072
8'-0 5/32"	8'-0 21/32"	2455	88 1/16"	33-3080	33-4080
8'-2 5/32"	8'-2 21/32"	2506	90 1/16"	33-3082	33-4082
9'-0 5/32"	9'-0 21/32"	2760	100 1/16"	33-3090	33-4090
10'-0 5/32"	10'-0 21/32"	3065	112 1/16"	33-30100	33-40100

Note: for motorized doors add 20" to rough opening


33-3068


33-4068


33-30610

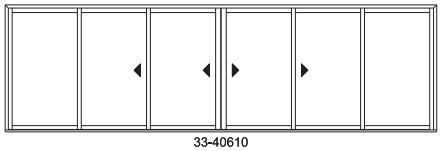
33-40610


33-3072

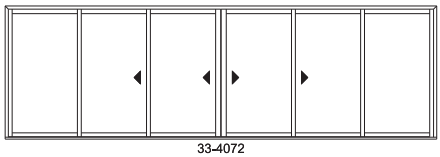
33-4072


33-3080

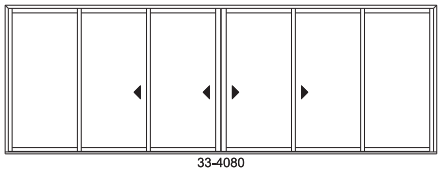
33-4080


33-3082

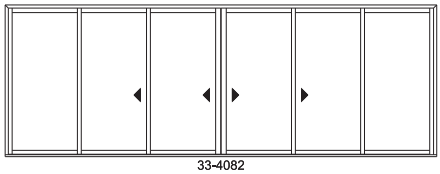
33-4082


33-3090

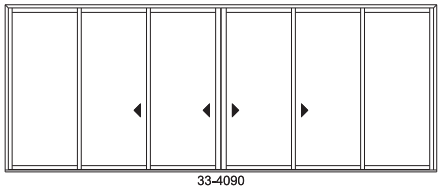
33-4090


33-30100

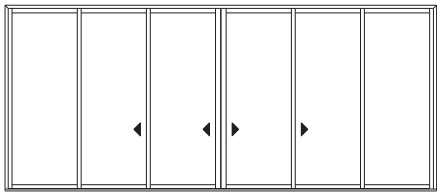
33-40100

Not to scale.

Size Tables

Multi-Slide Doors - 2-1/4" Panel (4701) 3L3R Panel

Jamb Dimension			29'-3 1/4"	35'-3 1/4"
Rough Opening			29'-4 1/4"	35'-4 1/4"
Soft Metric R.O. (mm)			8947	10776
Glass Size			55 1/4"	67 1/4"
6'-7 21/32"	6'-8 5/32"	2036	71 9/16"	
6'-10 5/32"	6'-10 21/32"	2099	74 1/16"	
7'-2 5/32"	7'-2 21/32"	2201	78 1/16"	
8'-0 5/32"	8'-0 21/32"	2455	88 1/16"	
8'-2 5/32"	8'-2 21/32"	2506	90 1/16"	
9'-0 5/32"	9'-0 21/32"	2760	100 1/16"	
10'-0 5/32"	10'-0 21/32"	3065	112 1/16"	

Note: for motorized doors add 20" to rough opening


33-5068


33-6068


33-50610


33-60610

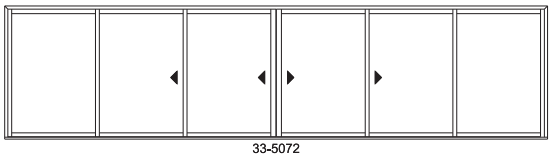
33-5072

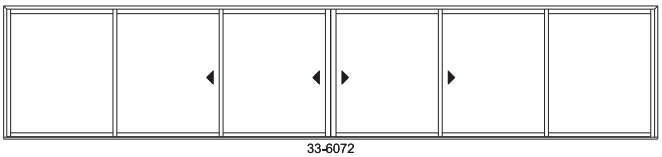
33-6072

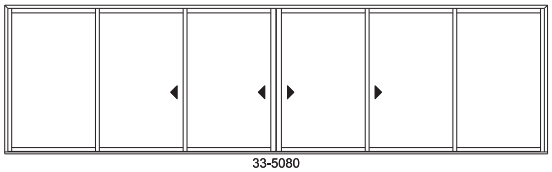
33-5080

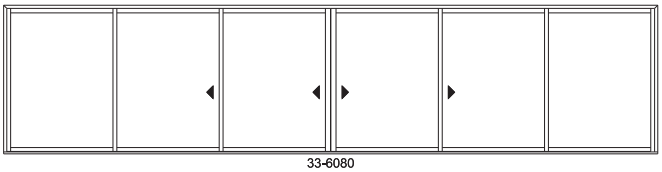
33-6080

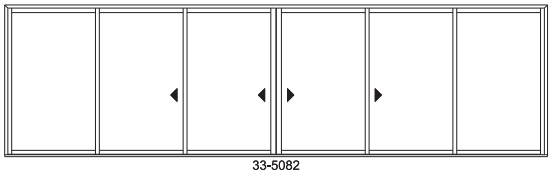
33-5082

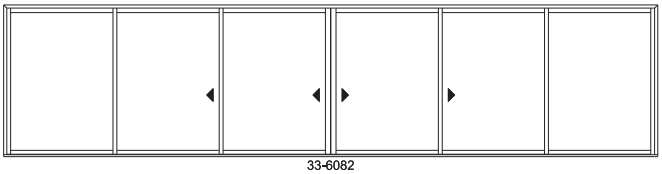
33-6082

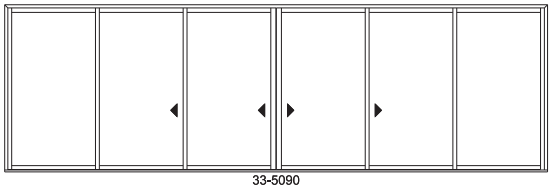
33-5090

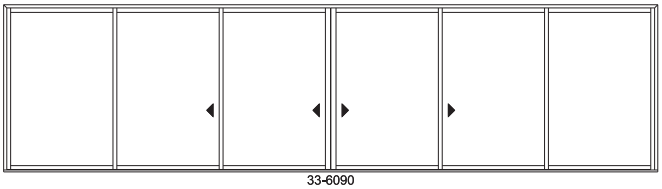
33-6090

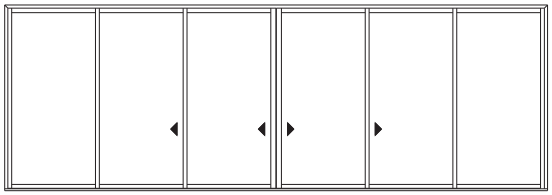
33-50100

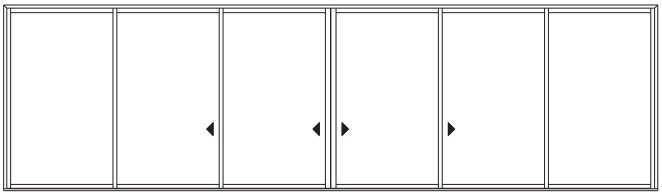
33-60100

Not to scale.

Size Tables

Multi-Slide Doors - 2-1/4" Panel (4701) 3L3R Panel

Jamb Dimension	17'-3 1/4"	23'-3 1/4"
Rough Opening	17'-4 1/4"	23'-4 1/4"
Soft Metric R.O. (mm)	5290	7118
Glass Size	31 1/4"	43 1/4"

11'-0 5/32" | 11'-0 21/32" | 3369 | 124 1/16"

12'-0 5/32" | 12'-0 21/32" | 3674 | 136 1/16"

Note: for motorized doors add 20" to rough opening



33-30110

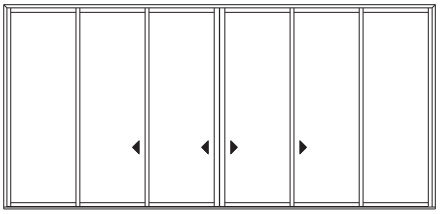

33-40110



33-30120

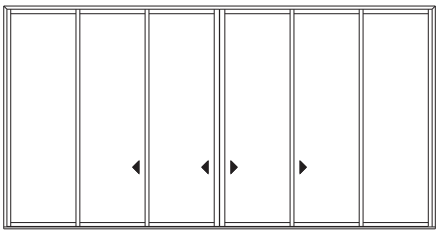

33-40120

Multi-Slide Doors - 2-1/4" Panel (4701) 3L3R Panel

Jamb Dimension	29'-3 1/4"	35'-3 1/4"
Rough Opening	29'-4 1/4"	35'-4 1/4"
Soft Metric R.O. (mm)	8947	10776
Glass Size	55 1/4"	67 1/4"

11'-0 5/32" | 11'-0 21/32" | 3369 | 124 1/16"

12'-0 5/32" | 12'-0 21/32" | 3674 | 136 1/16"

Note: for motorized doors add 20" to rough opening

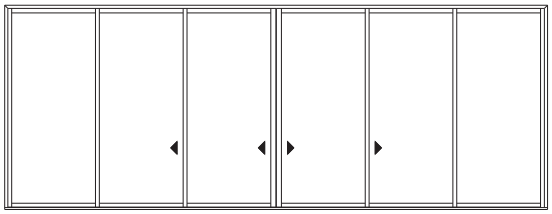

33-50110

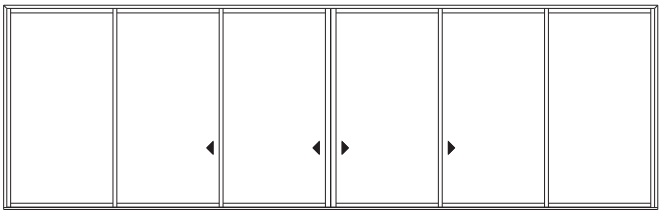

33-60110

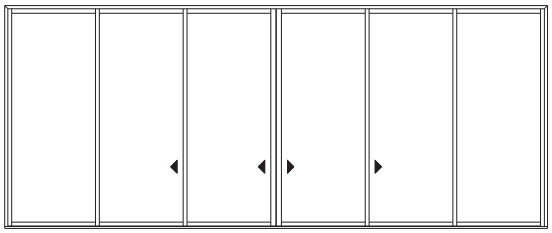

33-50120

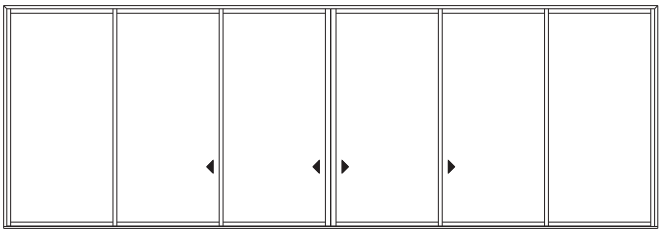

33-60120

Not to scale.

Size Tables

Multi-Slide Doors - 2-1/4" Panel (4701) 6 Panel Pocket

Exposed Jamb Width	16'-10 27/32"	22'-10 27/32"
Exposed RO Width	16'-11 17/32"	22'-11 17/32"
Pocket Width	3'-3"	4'-3"
Jamb Dimension	20'-1 17/32"	27'-1 17/32"
Rough Opening	20'-2 17/32"	27'-2 17/32"
Soft Metric R.O. (mm)	6160	8294
Glass Size	31 1/4"	43 1/4"

Pocket Depth - 20"

Note: for motorized doors add 20" to rough opening

6'-7 21/32"	6'-8 5/32"	2036	71 9/16"	6P-3068 / 6P-4068
6'-10 5/32"	6'-10 21/32"	2099	74 1/16"	6P-30610 / 6P-40610
7'-2 5/32"	7'-2 21/32"	2201	78 1/16"	6P-3072 / 6P-4072
8'-0 5/32"	8'-0 21/32"	2455	88 1/16"	6P-3080 / 6P-4080
8'-2 5/32"	8'-2 21/32"	2506	90 1/16"	6P-3082 / 6P-4082
9'-0 5/32"	9'-0 21/32"	2760	100 1/16"	6P-3090 / 6P-4090
10'-0 5/32"	10'-0 21/32"	3065	112 1/16"	6P-30100 / 6P-40100

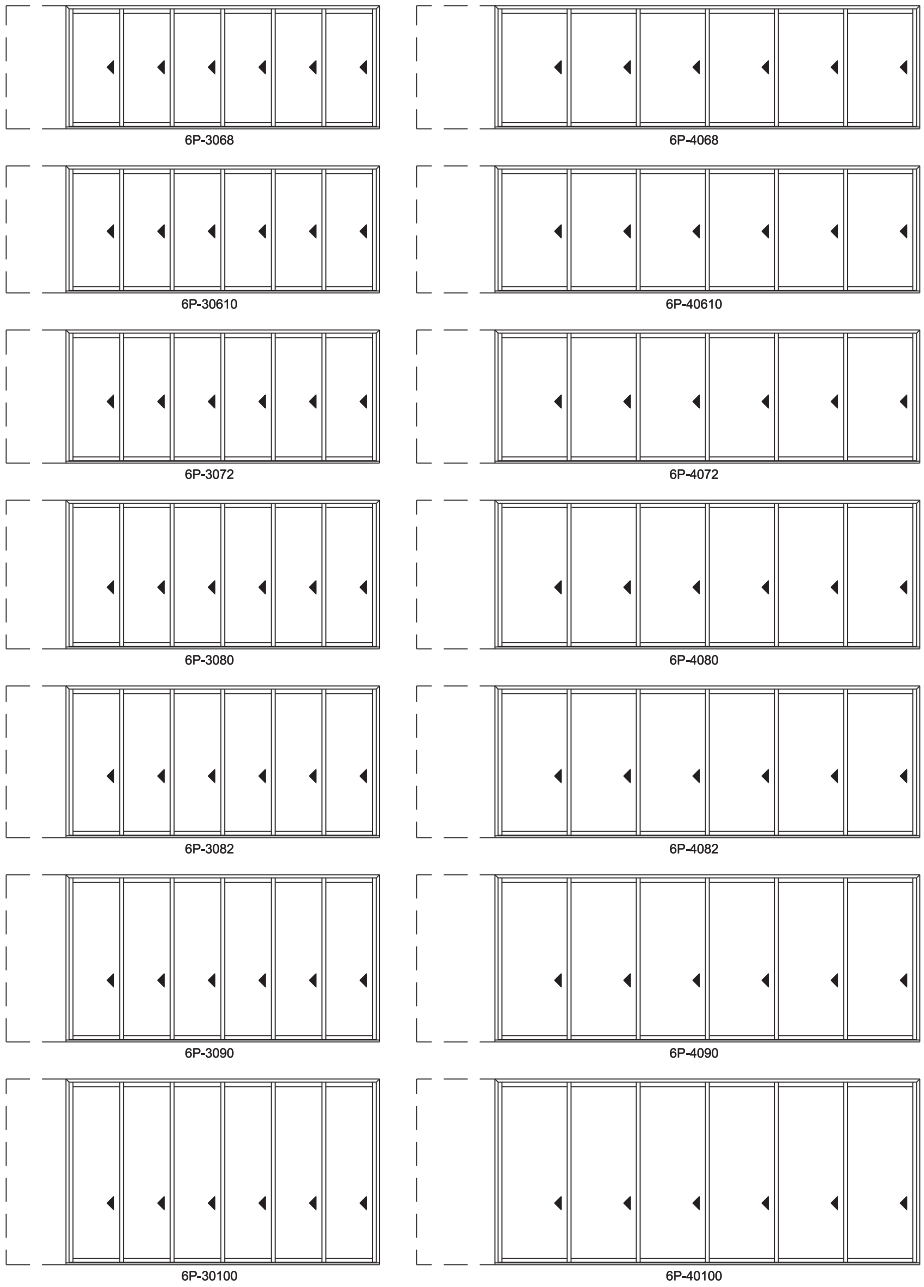

6L shown; 6R available

Not to scale.

Size Tables

Multi-Slide Doors - 2-1/4" Panel (4701) 6 Panel Pocket

Exposed Jamb Width	28'-10 27/32"
Exposed RO Width	28'-11 17/32"
Pocket Width	5'-3"
Jamb Dimension	34'-1 17/32"
Rough Opening	34'-2 17/32"
Soft Metric R.O. (mm)	10427
Glass Size	55 1/4"

Pocket Depth - 20"

Note: for motorized doors add 20" to rough opening

6'-7 21/32"	6'-8 5/32"	2036	71 9/16"
6'-10 5/32"	6'-10 21/32"	2099	74 1/16"
7'-2 5/32"	7'-2 21/32"	2201	78 1/16"
8'-0 5/32"	8'-0 21/32"	2455	88 1/16"
8'-2 5/32"	8'-2 21/32"	2506	90 1/16"
9'-0 5/32"	9'-0 21/32"	2760	100 1/16"
10'-0 5/32"	10'-0 21/32"	3065	112 1/16"

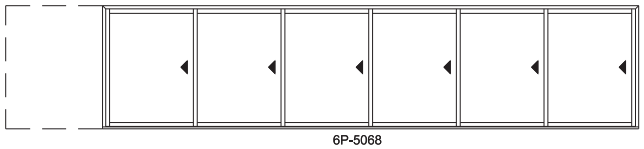

6P-5068



6P-50610



6P-5072

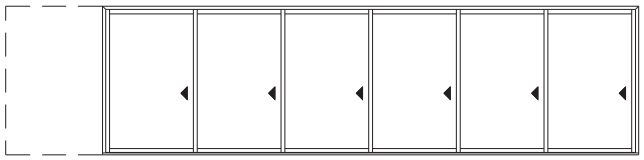

6P-5080

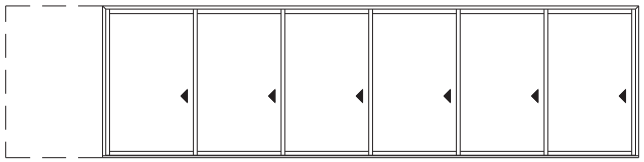

6P-5082

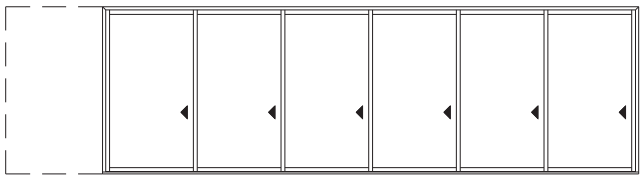

6P-5090

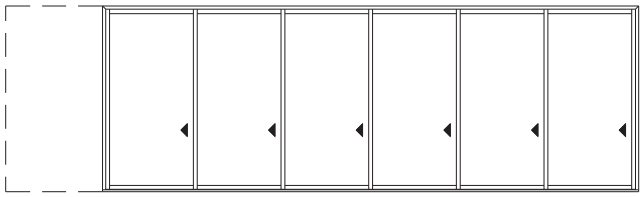

6P-50100

6L shown; 6R available

Not to scale.

Size Tables

Multi-Slide Doors - 2-1/4" Panel (4701) 6 Panel Pocket

Exposed Jamb Width	34'-10 27/32"
Exposed RO Width	34'-11 17/32"
Pocket Width	6'-3"
Jamb Dimension	41'-1 17/32"
Rough Opening	41'-2 17/32"
Soft Metric R.O. (mm)	12561
Glass Size	67 1/4"

Pocket Depth - 20"

Note: for motorized doors add 20" to rough opening

6'-7 21/32"	6'-8 5/32"	2036	71 9/16"	6P-6068
6'-10 5/32"	6'-10 21/32"	2099	74 1/16"	6P-60610
7'-2 5/32"	7'-2 21/32"	2201	78 1/16"	6P-6072
8'-0 5/32"	8'-0 21/32"	2455	88 1/16"	6P-6080
8'-2 5/32"	8'-2 21/32"	2506	90 1/16"	6P-6082
9'-0 5/32"	9'-0 21/32"	2760	100 1/16"	6P-6090
10'-0 5/32"	10'-0 21/32"	3065	112 1/16"	6P-60100

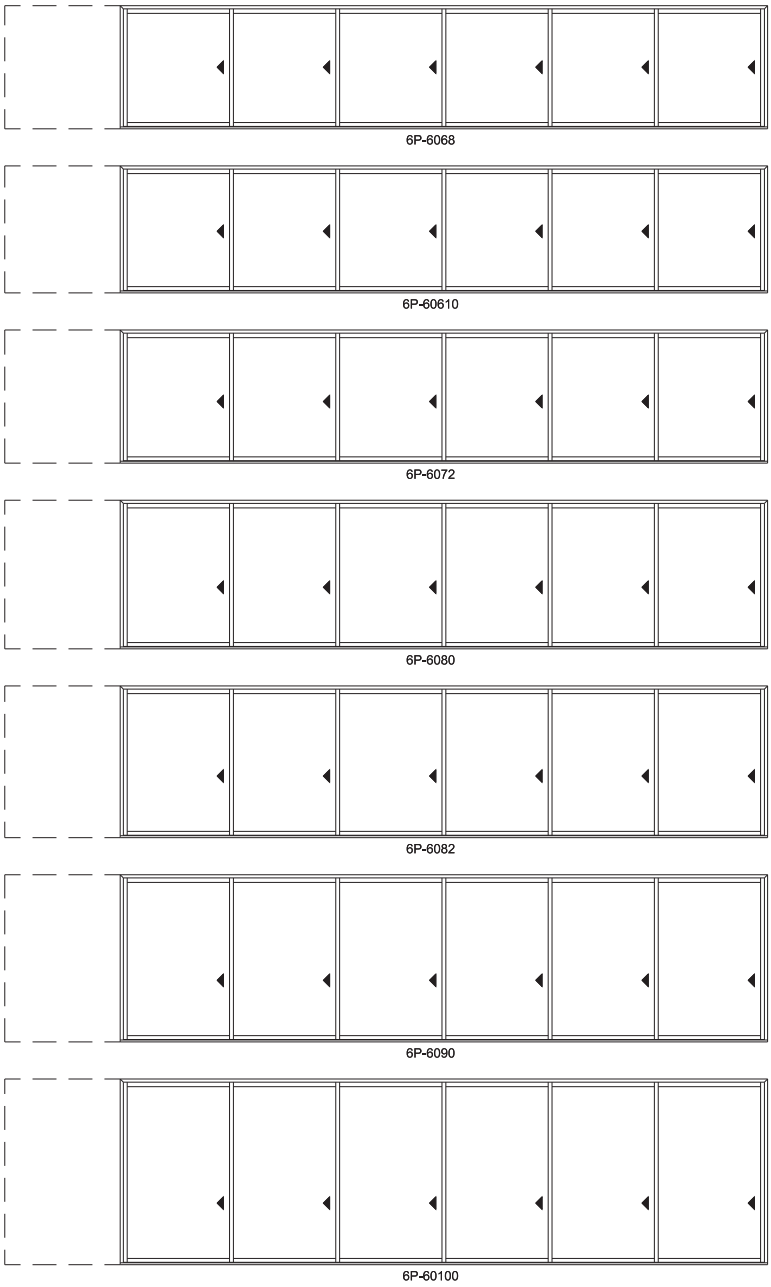

6L shown; 6R available

Not to scale.

Multi-Slide Doors - 2-1/4" Panel (4701) 6 Panel Pocket

Exposed Jamb Width	16'-10 27/32"	22'-10 27/32"
Exposed RO Width	16'-11 17/32"	22'-11 17/32"
Pocket Width	3'-3"	4'-3"
Jamb Dimension	20'-1 17/32"	27'-1 17/32"
Rough Opening	20'-2 17/32"	27'-2 17/32"
Soft Metric R.O. (mm)	6160	8294
Glass Size	31 1/4"	43 1/4"

11'-0 5/32" 11'-0 21/32" 3369 124 1/16"

12'-0 5/32" 12'-0 21/32" 3674 136 1/16"

Pocket Depth - 20"

Note: for motorized doors add 20" to rough opening

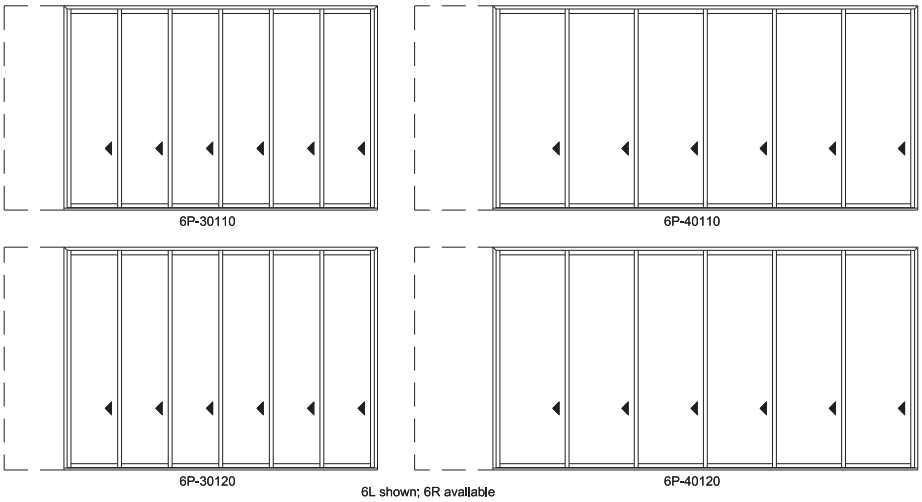

6L shown; 6R available

Multi-Slide Doors - 2-1/4" Panel (4701) 6 Panel Pocket

Exposed Jamb Width	28'-10 27/32"
Exposed RO Width	28'-11 17/32"
Pocket Width	5'-3"
Jamb Dimension	34'-1 17/32"
Rough Opening	34'-2 17/32"
Soft Metric R.O. (mm)	10427
Glass Size	55 1/4"

11'-0 5/32" 11'-0 21/32" 3369 124 1/16"

12'-0 5/32" 12'-0 21/32" 3674 136 1/16"

Pocket Depth - 20"

Note: for motorized doors add 20" to rough opening

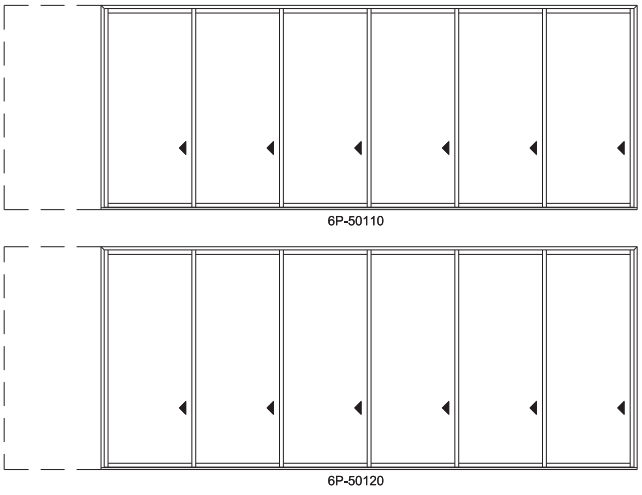

Not to scale.

Size Tables

Multi-Slide Doors - 2-1/4" Panel (4701) 6 Panel Pocket

Exposed Jamb Width	34'-10 27/32"
Exposed RO Width	34'-11 17/32"
Pocket Width	6'-3"
Jamb Dimension	41'-1 17/32"
Rough Opening	41'-2 17/32"
Soft Metric R.O. (mm)	12561
Glass Size	67 1/4"

11'-0 5/32"
11'-0 21/32"
3369
124 1/16"

12'-0 5/32"
12'-0 21/32"
3674
136 1/16"

Pocket Depth - 20"

Note: for motorized doors add 20" to rough opening

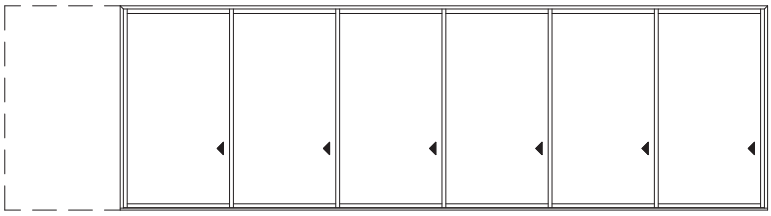

6P-60110

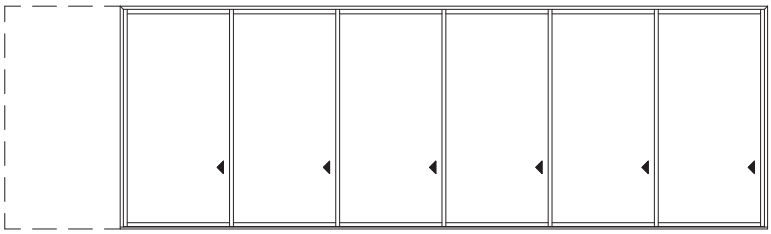

6P-60120

6L shown; 6R available

Not to scale.

Multi-Slide Doors - 2-1/4" Panel (4701) 3L3R Panel Pocket

Exposed Jamb Width	17'-3 7/32"	23'-3 7/32"
Exposed RO Width	17'-3 19/32"	23'-3 19/32"
Pocket Width	3'-3"	4'-3"
Jamb Dimension	23'-8 19/32"	31'-8 19/32"
Rough Opening	23'-9 19/32"	31'-9 19/32"
Soft Metric R.O. (mm)	7254	9692
Glass Size	31 1/4"	43 1/4"

Pocket Depth - 11"

Note: for motorized doors add 20" to rough opening

6'-7 21/32"	6'-8 5/32"	2036	71 9/16"	33P-3068 / 33P-4068
6'-10 5/32"	6'-10 21/32"	2099	74 1/16"	33P-30610 / 33P-40610
7'-2 5/32"	7'-2 21/32"	2201	78 1/16"	33P-3072 / 33P-4072
8'-0 5/32"	8'-0 21/32"	2455	88 1/16"	33P-3080 / 33P-4080
8'-2 5/32"	8'-2 21/32"	2506	90 1/16"	33P-3082 / 33P-4082
9'-0 5/32"	9'-0 21/32"	2760	100 1/16"	33P-3090 / 33P-4090
10'-0 5/32"	10'-0 21/32"	3065	112 1/16"	33P-30100 / 33P-40100

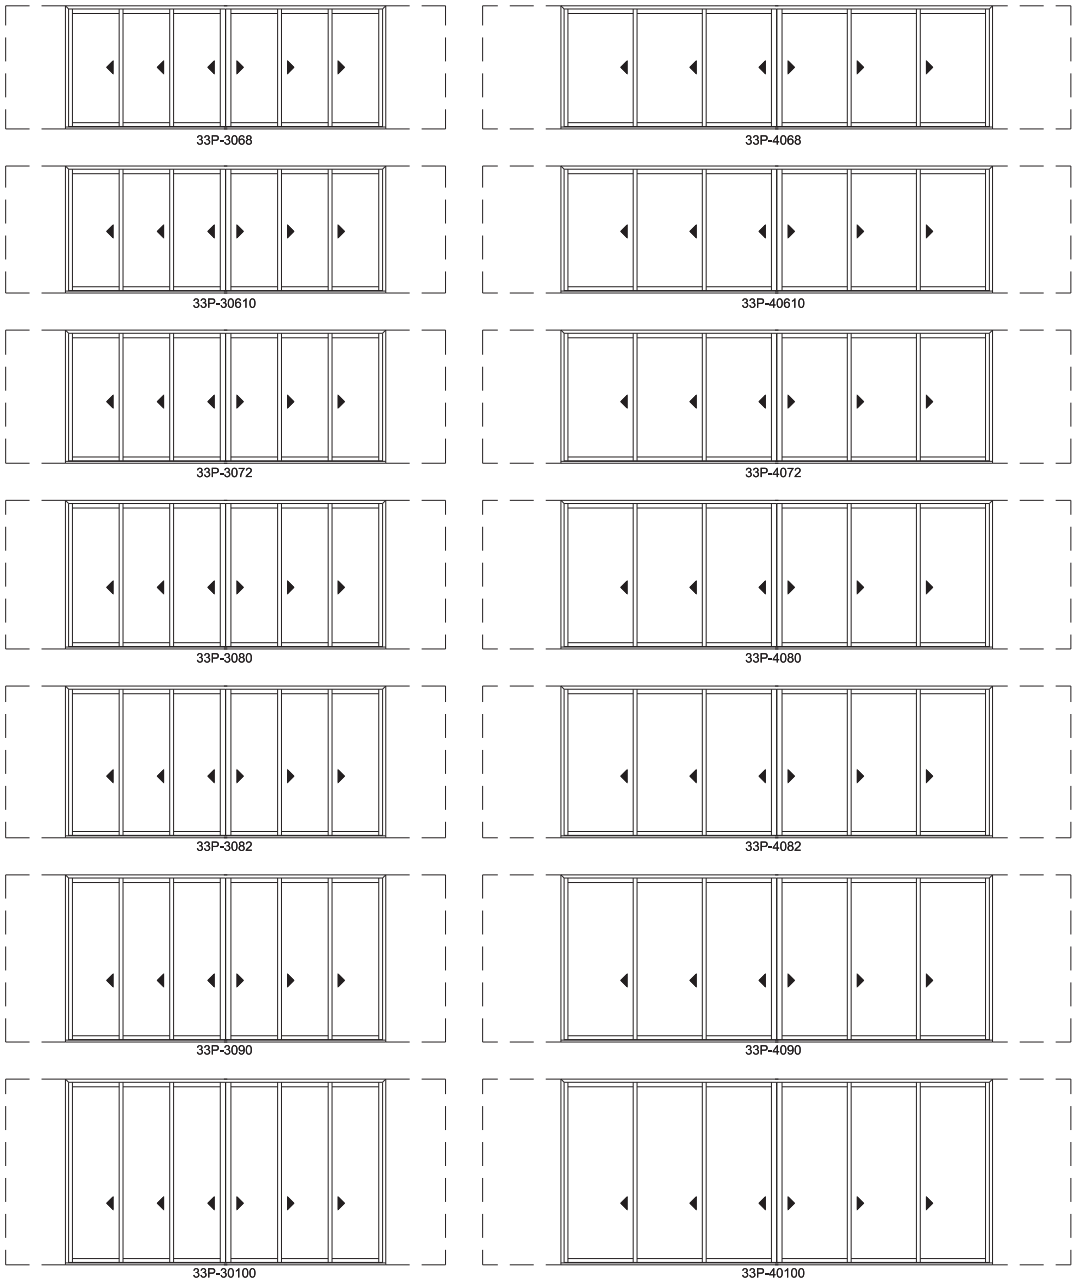

Not to scale.

Size Tables

Multi-Slide Doors - 2-1/4" Panel (4701) 3L3R Panel Pocket

Exposed Jamb Width	29'-3 7/32"
Exposed RO Width	29'-3 19/32"
Pocket Width	5'-3"
Jamb Dimension	39'-8 19/32"
Rough Opening	39'-9 19/32"
Soft Metric R.O. (mm)	12131
Glass Size	55 1/4"

Pocket Depth - 11"

Note: for motorized doors add 20" to rough opening

6'-7 21/32"	6'-8 5/32"	2036	71 9/16"	33P-5068
6'-10 5/32"	6'-10 21/32"	2099	74 1/16"	33P-50610
7'-2 5/32"	7'-2 21/32"	2201	78 1/16"	33P-5072
8'-0 5/32"	8'-0 21/32"	2455	88 1/16"	33P-5080
8'-2 5/32"	8'-2 21/32"	2506	90 1/16"	33P-5082
9'-0 5/32"	9'-0 21/32"	2760	100 1/16"	33P-5090
10'-0 5/32"	10'-0 21/32"	3065	112 1/16"	33P-50100

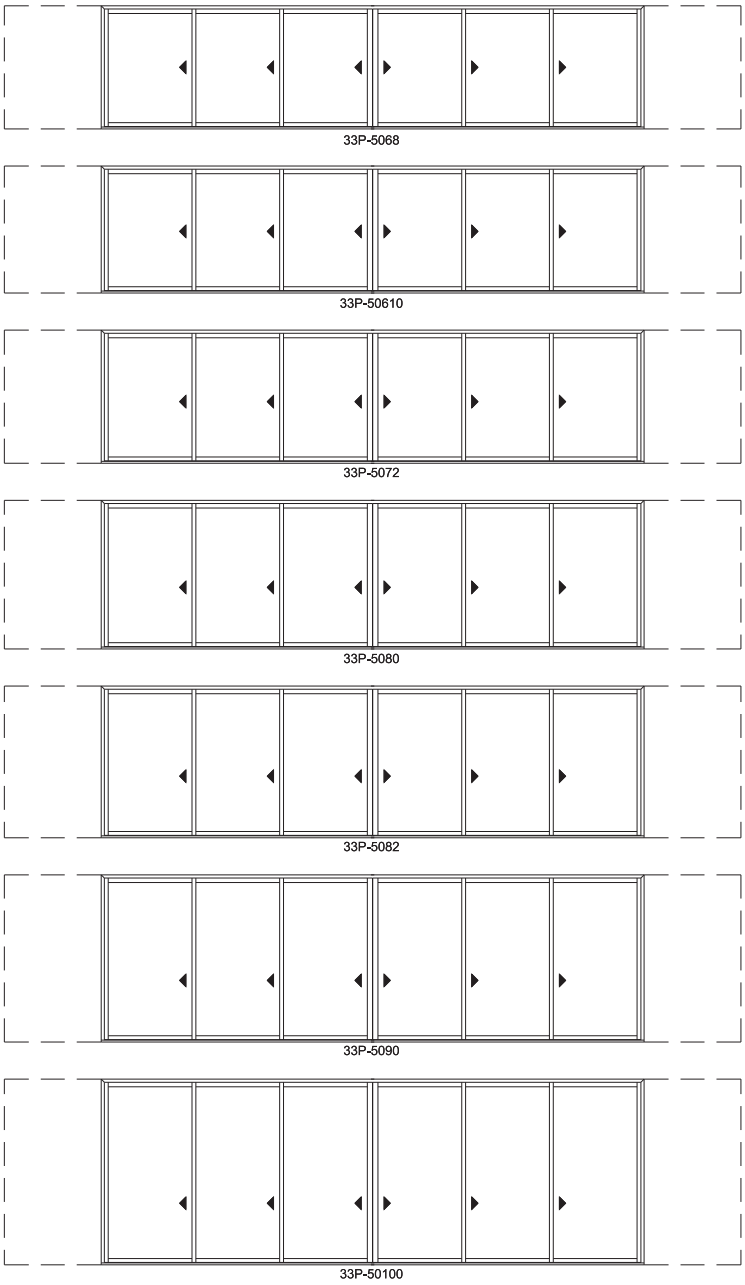

Not to scale.

Multi-Slide Doors - 2-1/4" Panel (4701) 3L3R Panel Pocket

Exposed Jamb Width	35'-3 7/32"
Exposed RO Width	35'-3 19/32"
Pocket Width	6'-3"
Jamb Dimension	47'-8 19/32"
Rough Opening	47'-9 19/32"
Soft Metric R.O. (mm)	14569
Glass Size	67 1/4"

Pocket Depth - 11"

Note: for motorized doors add 20" to rough opening

6'-7 21/32"	6'-8 5/32"	2036	71 9/16"	6'-10 5/32"	6'-10 21/32"	2099
74 1/16"	7'-2 5/32"	7'-2 21/32"	2201	78 1/16"	8'-0 5/32"	8'-0 21/32"
2455	88 1/16"	8'-2 5/32"	8'-2 21/32"	2506	90 1/16"	9'-0 5/32"
9'-0 21/32"	2760	100 1/16"	10'-0 5/32"	10'-0 21/32"	3065	112 1/16"

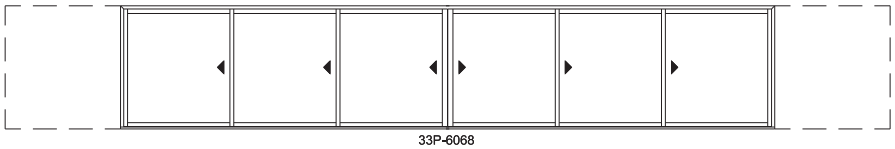

33P-6068



33P-60610



33P-6072

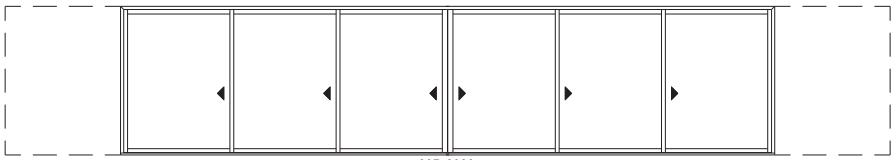

33P-6080

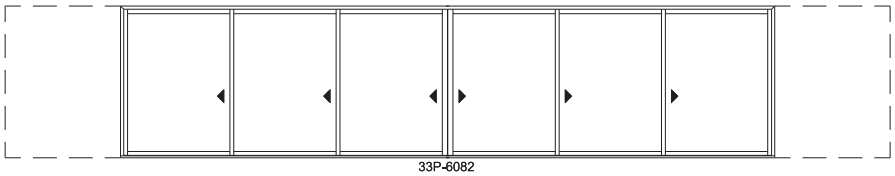

33P-6082

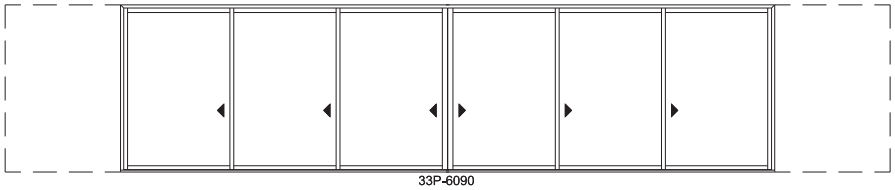

33P-6090

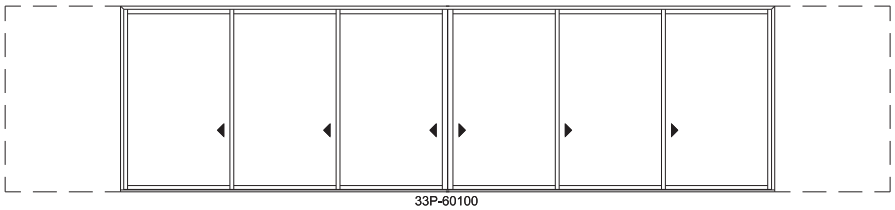

33P-60100

Not to scale.

Multi-Slide Doors - 2-1/4" Panel (4701) 3L3R Panel Pocket

Exposed Jamb Width	17'-3 7/32"	23'-3 7/32"
Exposed RO Width	17'-3 19/32"	23'-3 19/32"
Pocket Width	3'-3"	4'-3"
Jamb Dimension	23'-8 19/32"	31'-8 19/32"
Rough Opening	23'-9 19/32"	31'-9 19/32"
Soft Metric R.O. (mm)	7254	9692
Glass Size	31 1/4"	43 1/4"

Pocket Depth - 11"

Note: for motorized doors add 20" to rough opening

11'-0 5/32" | 11'-0 21/32" | 3369 | 124 1/16"

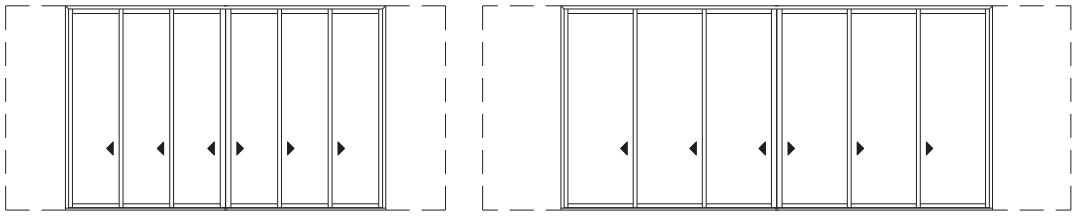

33P-30110

33P-40110

12'-0 5/32" | 12'-0 21/32" | 3674 | 136 1/16"

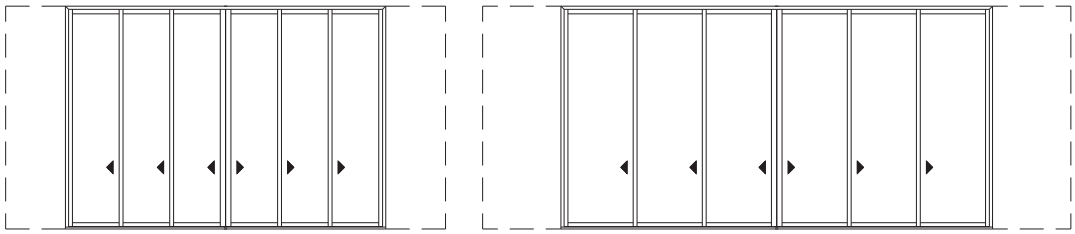

33P-30120

33P-40120

Multi-Slide Doors - 2-1/4" Panel (4701) 3L3R Panel Pocket

Exposed Jamb Width	29'-3 7/32"
Exposed RO Width	29'-3 19/32"
Pocket Width	5'-3"
Jamb Dimension	39'-8 19/32"
Rough Opening	39'-9 19/32"
Soft Metric R.O. (mm)	12131
Glass Size	55 1/4"

Pocket Depth - 11"

Note: for motorized doors add 20" to rough opening

11'-0 5/32" | 11'-0 21/32" | 3369 | 124 1/16"

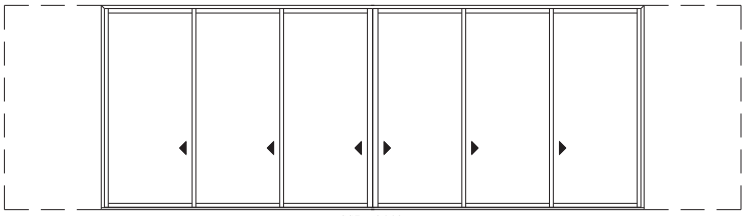

33P-50110

12'-0 5/32" | 12'-0 21/32" | 3674 | 136 1/16"

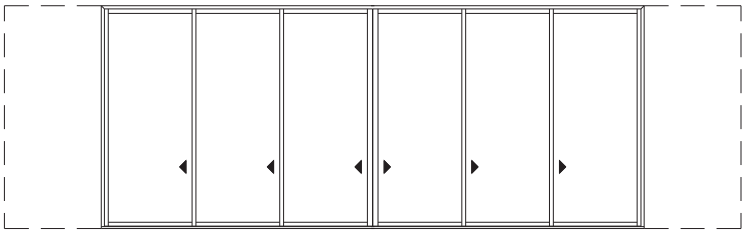

33P-50120

Not to scale.

Multi-Slide Doors - 2-1/4" Panel (4701) 3L3R Panel Pocket

Exposed Jamb Width	35'-3 7/32"
Exposed RO Width	35'-3 19/32"
Pocket Width	6'-3"
Jamb Dimension	47'-8 19/32"
Rough Opening	47'-9 19/32"
Soft Metric R.O. (mm)	14569
Glass Size	67 1/4"

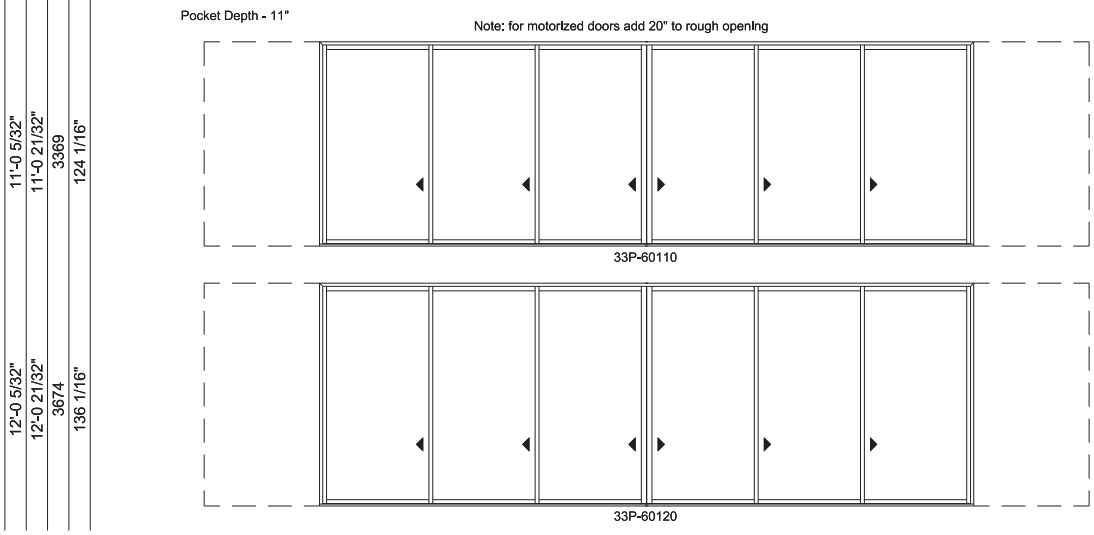

Not to scale.

Size Tables

Multi-Slide Doors - 2-1/4" Panel (4701) 4L4R Panel

Jamb Dimension				22'-8 5/8"	30'-8 5/8"
	Rough Opening			22'-9 5/8"	30'-9 5/8"
		Soft Metric R.O. (mm)		6950	9388
			Glass Size	31 1/4"	43 1/4"
6'-7 21/32"	6'-8 5/32"	2036	71 9/16"	44-3068	44-4068
6'-10 5/32"	6'-10 21/32"	2099	74 1/16"	44-30610	44-40610
7'-2 5/32"	7'-2 21/32"	2201	78 1/16"	44-3072	44-4072
8'-0 5/32"	8'-0 21/32"	2455	88 1/16"	44-3080	44-4080
8'-2 5/32"	8'-2 21/32"	2506	90 1/16"	44-3082	44-4082
9'-0 5/32"	9'-0 21/32"	2760	100 1/16"	44-3090	44-4090
10'-0 5/32"	10'-0 21/32"	3065	112 1/16"	44-30100	44-40100

Note: for motorized doors add 20" to rough opening

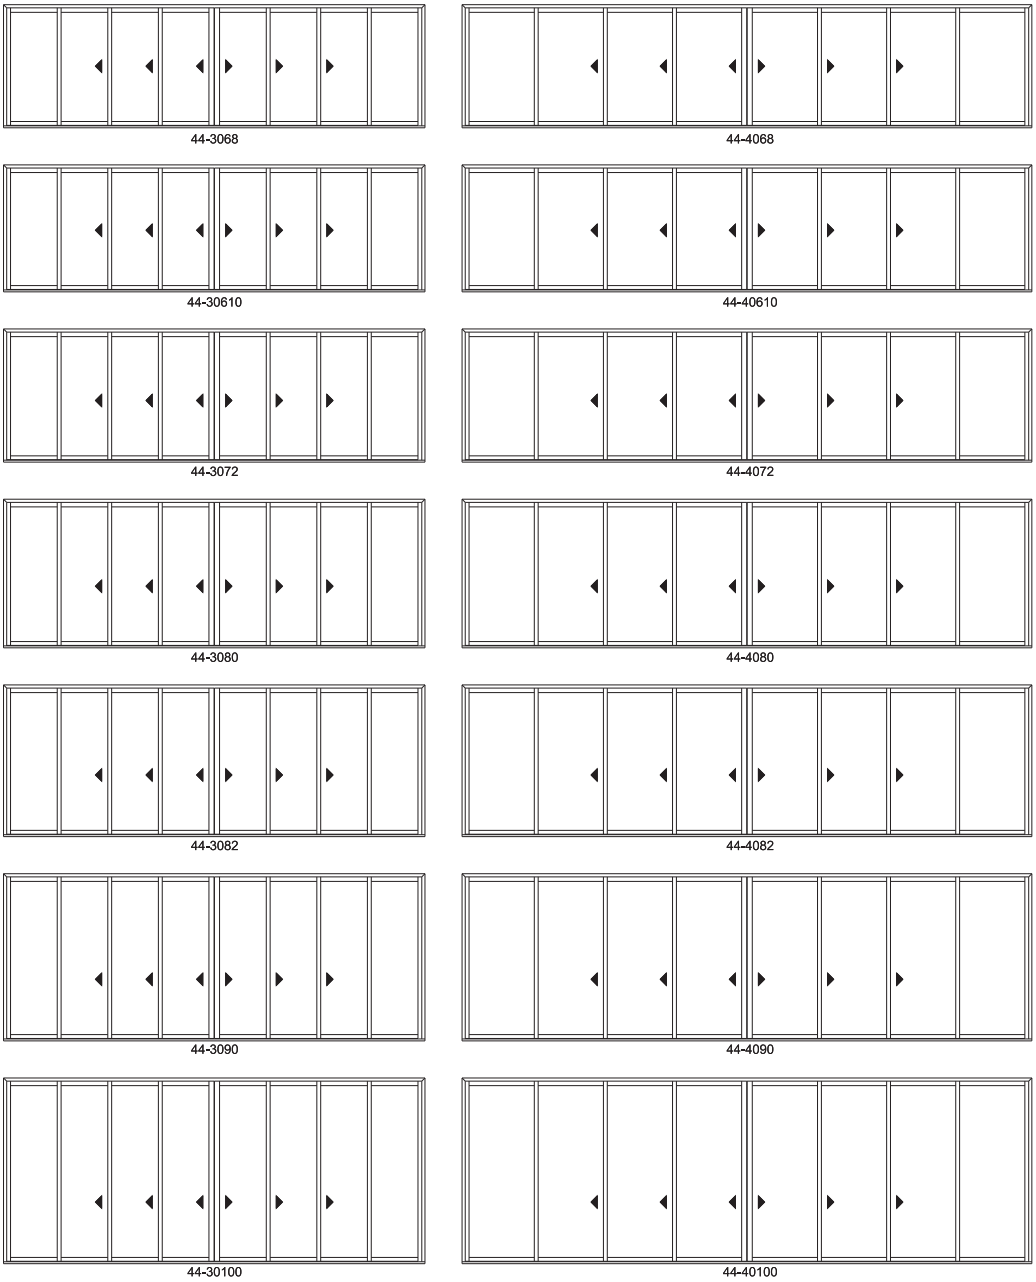

Not to scale.

Size Tables

Multi-Slide Doors - 2-1/4" Panel (4701) 4L4R Panel

Jamb Dimension	38'-8 5/8"
Rough Opening	38'-9 5/8"
Soft Metric R.O. (mm)	11827
Glass Size	55 1/4"

Note: for motorized doors add 20" to rough opening

6'-7 21/32"	6'-10 5/32"	7'-2 5/32"	8'-0 5/32"	8'-2 5/32"	9'-0 5/32"	10'-0 5/32"	
6'-8 5/32"	6'-10 21/32"	7'-2 21/32"	8'-0 21/32"	8'-2 21/32"	9'-0 21/32"	10'-0 21/32"	
2036	2099	2201	2455	2506	2760	3065	
71 9/16"	74 1/16"	78 1/16"	88 1/16"	90 1/16"	100 1/16"	112 1/16"	



44-5068



44-50610

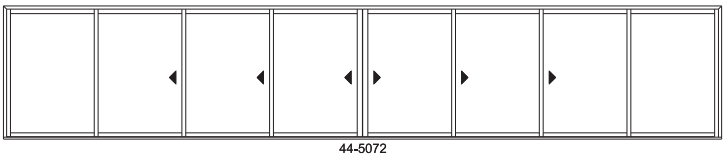

44-5072

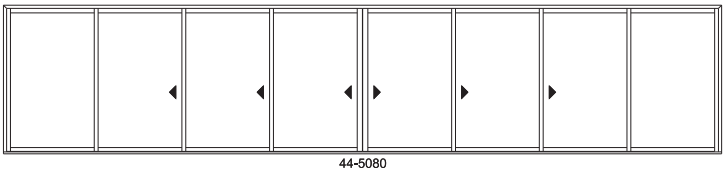

44-5080

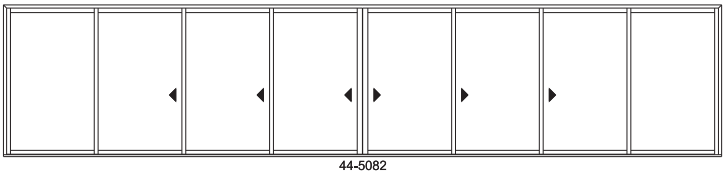

44-5082

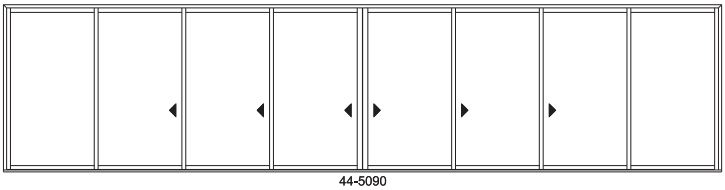

44-5090

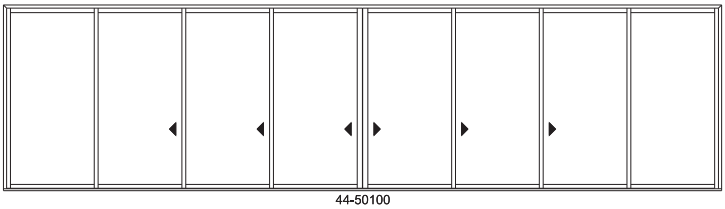

44-50100

Not to scale.

Size Tables

Multi-Slide Doors - 2-1/4" Panel (4701) 4L4R Panel

Jamb Dimension	46'-8 5/8"
Rough Opening	46'-9 5/8"
Soft Metric R.O. (mm)	14265
Glass Size	67 1/4"

Note: for motorized doors add 20" to rough opening

6'-7 21/32"	6'-8 5/32"	2036	71 9/16"	◀	◀	◀	▶	▶	▶
6'-10 5/32"	6'-10 21/32"	2099	74 1/16"	◀	◀	◀	▶	▶	▶
7'-2 5/32"	7'-2 21/32"	2201	78 1/16"	◀	◀	◀	▶	▶	▶
8'-0 5/32"	8'-0 21/32"	2455	88 1/16"	◀	◀	◀	▶	▶	▶
8'-2 5/32"	8'-2 21/32"	2506	90 1/16"	◀	◀	◀	▶	▶	▶
9'-0 5/32"	9'-0 21/32"	2760	100 1/16"	◀	◀	◀	▶	▶	▶
10'-0 5/32"	10'-0 21/32"	3065	112 1/16"	◀	◀	◀	▶	▶	▶

44-6068

44-60610

44-6072

44-6080

44-6082

44-6090

44-60100

Not to scale.

Multi-Slide Doors - 2-1/4" Panel (4701) 4L4R Panel

Jamb Dimension		22'-8 5/8"	30'-8 5/8"
Rough Opening		22'-9 5/8"	30'-9 5/8"
Soft Metric R.O. (mm)		6950	9388
Glass Size		31 1/4"	43 1/4"
11'-0 5/32"	11'-0 21/32"	3369	124 1/16"
12'-0 5/32"	12'-0 21/32"	3674	136 1/16"

Note: for motorized doors add 20" to rough opening

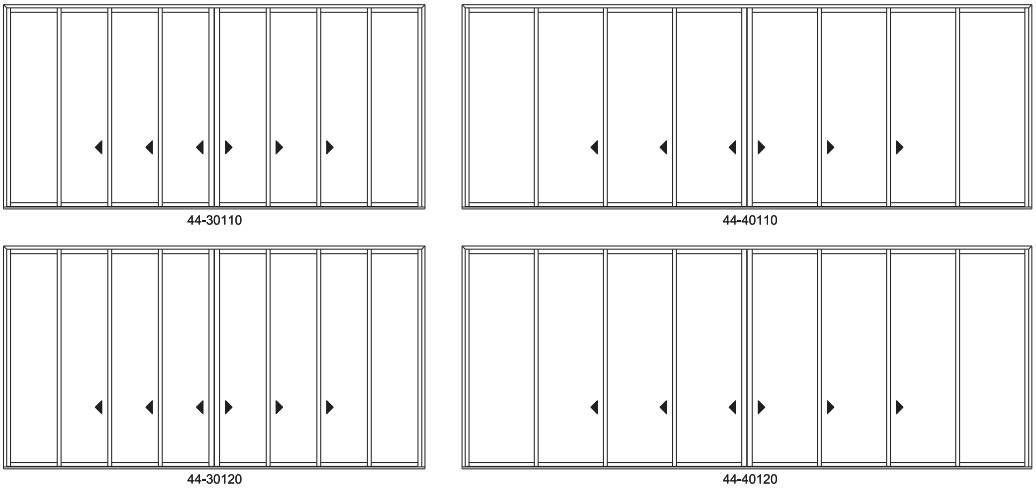

Multi-Slide Doors - 2-1/4" Panel (4701) 4L4R Panel

Jamb Dimension		38'-8 5/8"
Rough Opening		38'-9 5/8"
Soft Metric R.O. (mm)		11827
Glass Size		55 1/4"
11'-0 5/32"	11'-0 21/32"	3369	124 1/16"
12'-0 5/32"	12'-0 21/32"	3674	136 1/16"

Note: for motorized doors add 20" to rough opening

Not to scale.

Multi-Slide Doors - 2-1/4" Panel (4701) 4L4R Panel

Jamb Dimension	46'-8 5/8"
Rough Opening	46'-9 5/8"
Soft Metric R.O. (mm)	14265
Glass Size	67 1/4"

Note: for motorized doors add 20" to rough opening

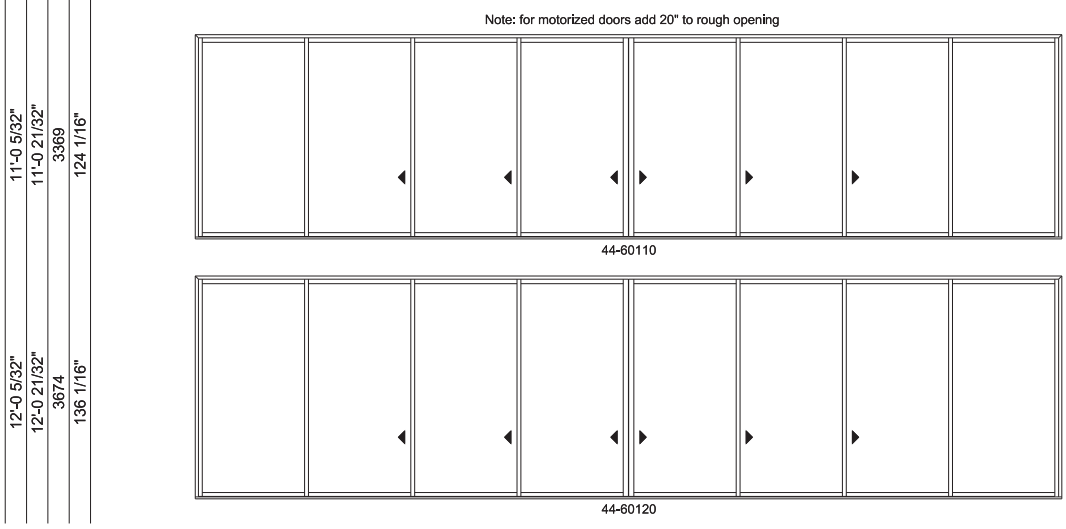

Not to scale.

Size Tables

Multi-Slide Doors - 2-1/4" Panel (4701) 4L4R Panel Pocket

Exposed Jamb Width	22'-8 21/32"	30'-8 21/32"
Exposed RO Width	22'-9 1/32"	30'-9 1/32"
Pocket Width	3'-3"	4'-3"
Jamb Dimension	29'-2 1/32"	39'-2 1/32"
Rough Opening	29'-3 1/32"	39'-3 1/32"
Soft Metric R.O. (mm)	8916	11964
Glass Size	31 1/4"	43 1/4"

Pocket Depth - 14"

Note: for motorized doors add 20" to rough opening

6'-7 21/32"	6'-8 5/32"	2036	71 9/16"	44P-3068	44P-4068
6'-10 5/32"	6'-10 21/32"	2099	74 1/16"	44P-30610	44P-40610
7'-2 5/32"	7'-2 21/32"	2201	78 1/16"	44P-3072	44P-4072
8'-0 5/32"	8'-0 21/32"	2455	88 1/16"	44P-3080	44P-4080
8'-2 5/32"	8'-2 21/32"	2506	90 1/16"	44P-3082	44P-4082
9'-0 5/32"	9'-0 21/32"	2760	100 1/16"	44P-3090	44P-4090
10'-0 5/32"	10'-0 21/32"	3065	112 1/16"	44P-30100	44P-40100

Not to scale.

Size Tables

Multi-Slide Doors - 2-1/4" Panel (4701) 4L4R Panel Pocket

Exposed Jamb Width	38'-8 21/32"
Exposed RO Width	38'-9 1/32"
Pocket Width	5'-3"
Jamb Dimension	49'-2 1/32"
Rough Opening	49'-3 1/32"
Soft Metric R.O. (mm)	15012
Glass Size	55 1/4"

Pocket Depth - 14"

Note: for motorized doors add 20" to rough opening

6'-7 21/32"	6'-8 5/32"	2036	71 9/16"	44P-5068
6'-10 5/32"	6'-10 21/32"	2099	74 1/16"	44P-50610
7'-2 5/32"	7'-2 21/32"	2201	78 1/16"	44P-5072
8'-0 5/32"	8'-0 21/32"	2455	88 1/16"	44P-5080
8'-2 5/32"	8'-2 21/32"	2506	90 1/16"	44P-5082
9'-0 5/32"	9'-0 21/32"	2760	100 1/16"	44P-5090
10'-0 5/32"	10'-0 21/32"	3065	112 1/16"	44P-50100

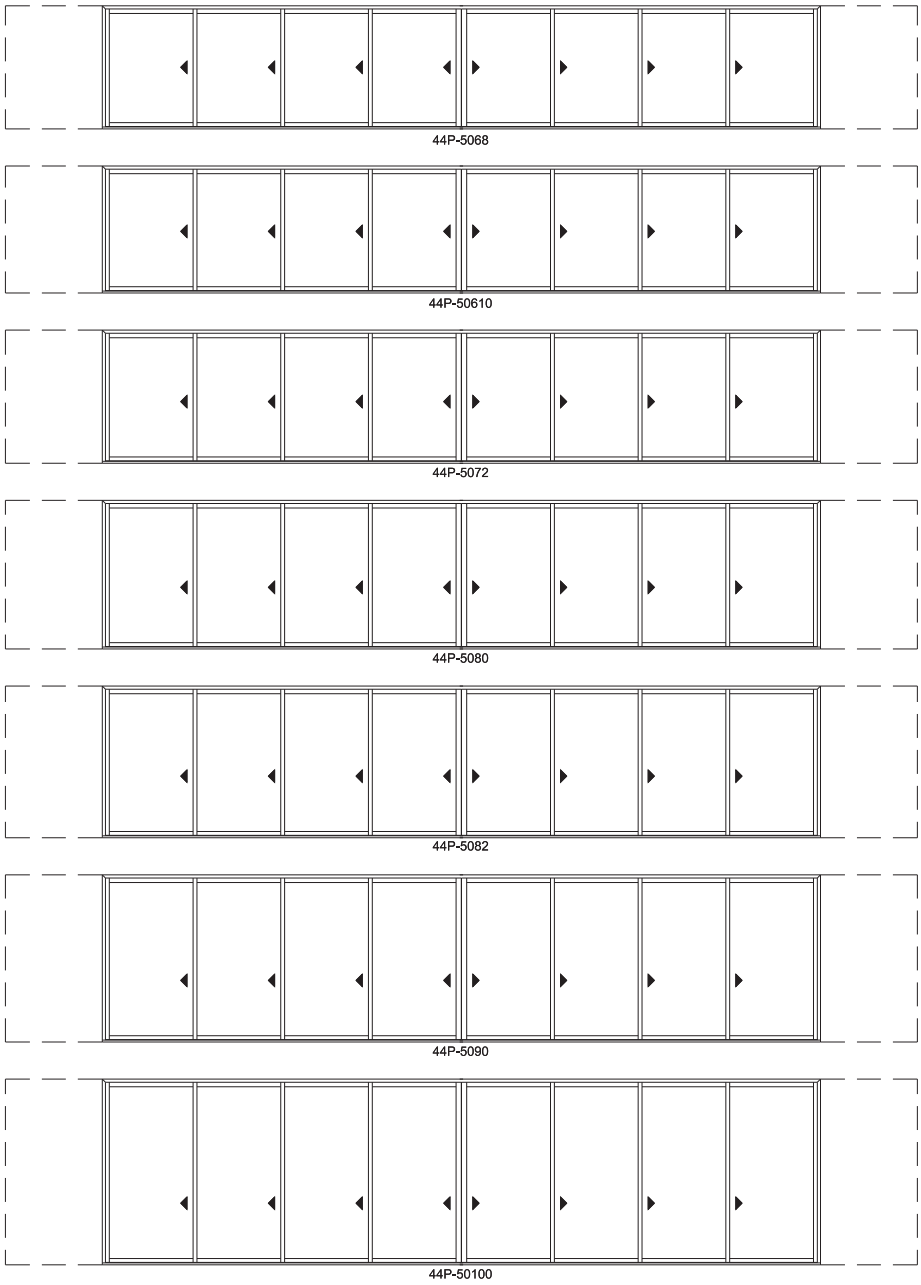

Not to scale.

Multi-Slide Doors - 2-1/4" Panel (4701) 4L4R Panel Pocket

Exposed Jamb Width	46'-8 21/32"
Exposed RO Width	46'-9 1/32"
Pocket Width	6'-3"
Jamb Dimension	59'-2 1/32"
Rough Opening	59'-3 1/32"
Soft Metric R.O. (mm)	18060
Glass Size	67 1/4"

Pocket Depth - 14"

Note: for motorized doors add 20" to rough opening

6'-7 21/32"	6'-8 5/32"	2036	71 9/16"
6'-10 5/32"	6'-10 21/32"	2099	74 1/16"
7'-2 5/32"	7'-2 21/32"	2201	78 1/16"
8'-0 5/32"	8'-0 21/32"	2455	88 1/16"
8'-2 5/32"	8'-2 21/32"	2506	90 1/16"
9'-0 5/32"	9'-0 21/32"	2760	100 1/16"
10'-0 5/32"	10'-0 21/32"	3065	112 1/16"

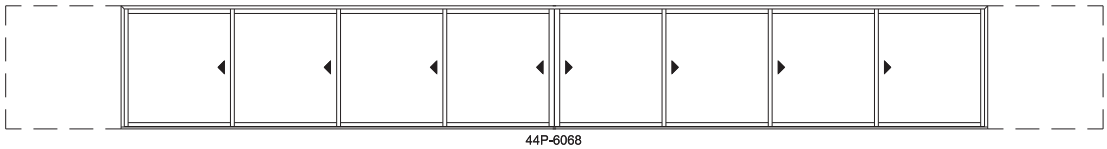

44P-6068

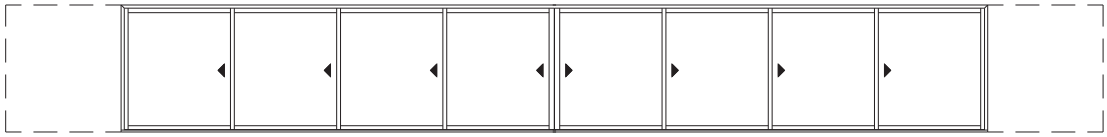

44P-60610

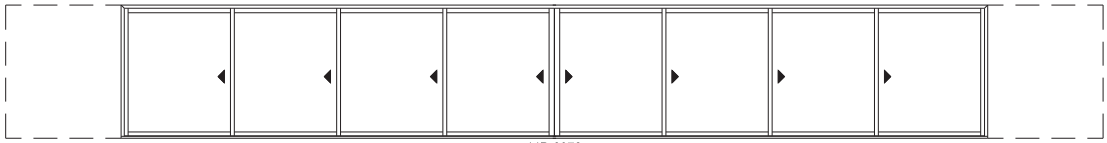

44P-6072

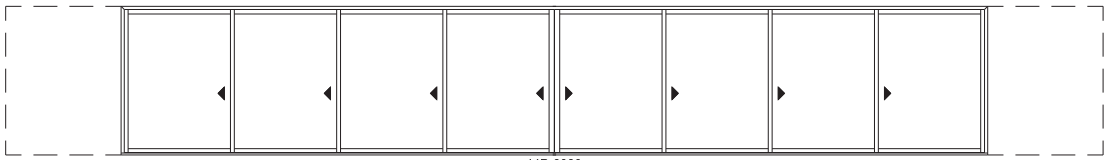

44P-6080

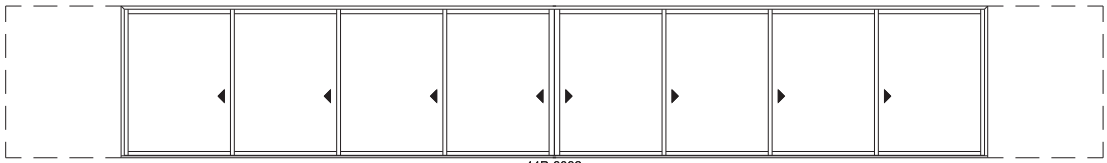

44P-6082

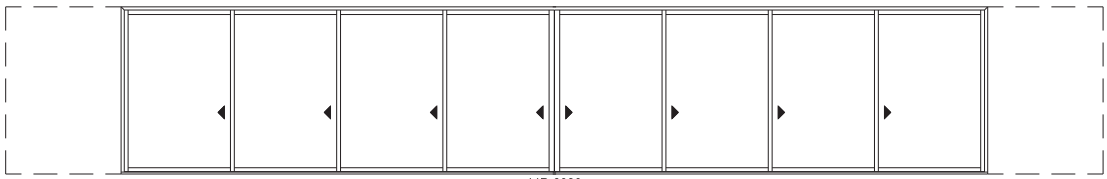

44P-6090

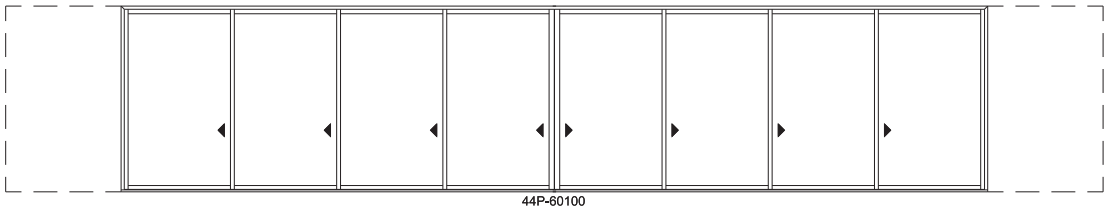

44P-60100

Not to scale.

Multi-Slide Doors - 2-1/4" Panel (4701) 4L4R Panel Pocket

Exposed Jamb Width	22'-8 21/32"	30'-8 21/32"
Exposed RO Width	22'-9 1/32"	30'-9 1/32"
Pocket Width	3'-3"	4'-3"
Jamb Dimension	29'-2 1/32"	39'-2 1/32"
Rough Opening	29'-3 1/32"	39'-3 1/32"
Soft Metric R.O. (mm)	8916	11964
Glass Size	31 1/4"	43 1/4"

Pocket Depth - 14"

Note: for motorized doors add 20" to rough opening

11'-0 5/32" | 11'-0 21/32" | 3369 | 124 1/16"

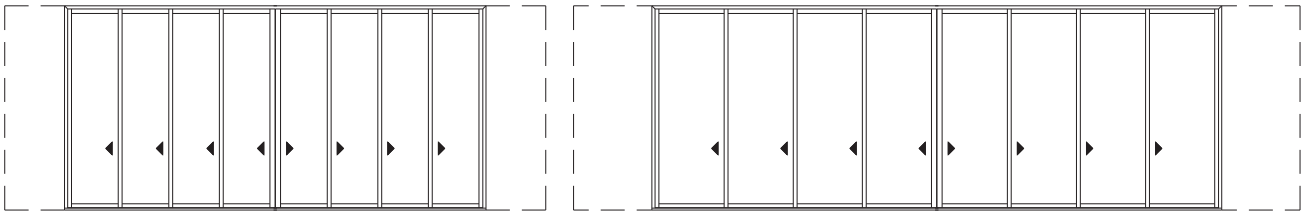

44P-30110 44P-40110

12'-0 5/32" | 12'-0 21/32" | 3674 | 136 1/16"

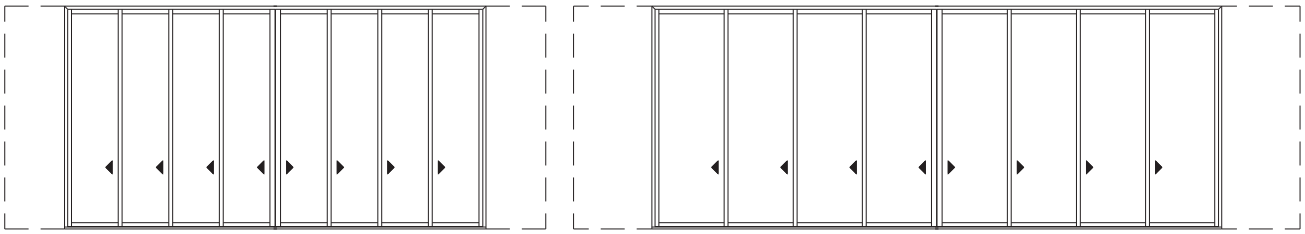

44P-30120 44P-40120

Multi-Slide Doors - 2-1/4" Panel (4701) 4L4R Panel Pocket

Exposed Jamb Width	38'-8 21/32"
Exposed RO Width	38'-9 1/32"
Pocket Width	5'-3"
Jamb Dimension	49'-2 1/32"
Rough Opening	49'-3 1/32"
Soft Metric R.O. (mm)	15012
Glass Size	55 1/4"

Pocket Depth - 14"

Note: for motorized doors add 20" to rough opening

11'-0 5/32" | 11'-0 21/32" | 3369 | 124 1/16"

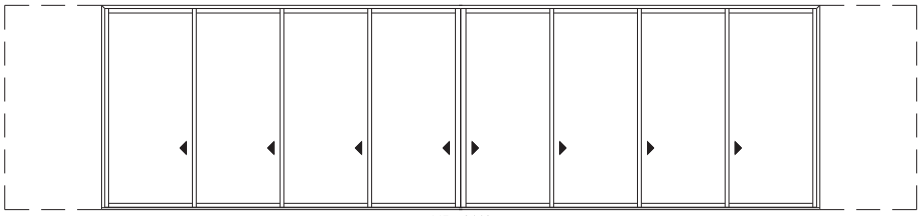

44P-50110

12'-0 5/32" | 12'-0 21/32" | 3674 | 136 1/16"

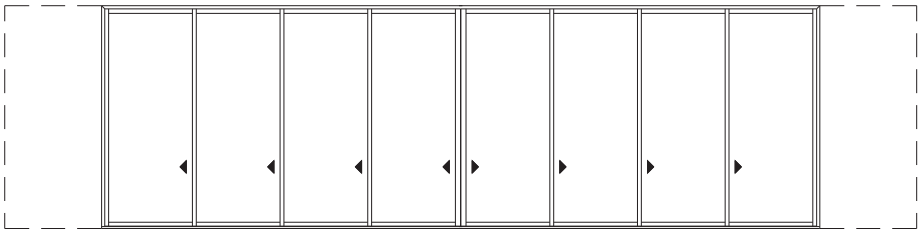

44P-50120

Not to scale.

Multi-Slide Doors - 2-1/4" Panel (4701) 4L4R Panel Pocket

Exposed Jamb Width	46'-8 21/32"
Exposed RO Width	46'-9 1/32"
Pocket Width	6'-3"
Jamb Dimension	59'-2 1/32"
Rough Opening	59'-3 1/32"
Soft Metric R.O. (mm)	18060
Glass Size	67 1/4"

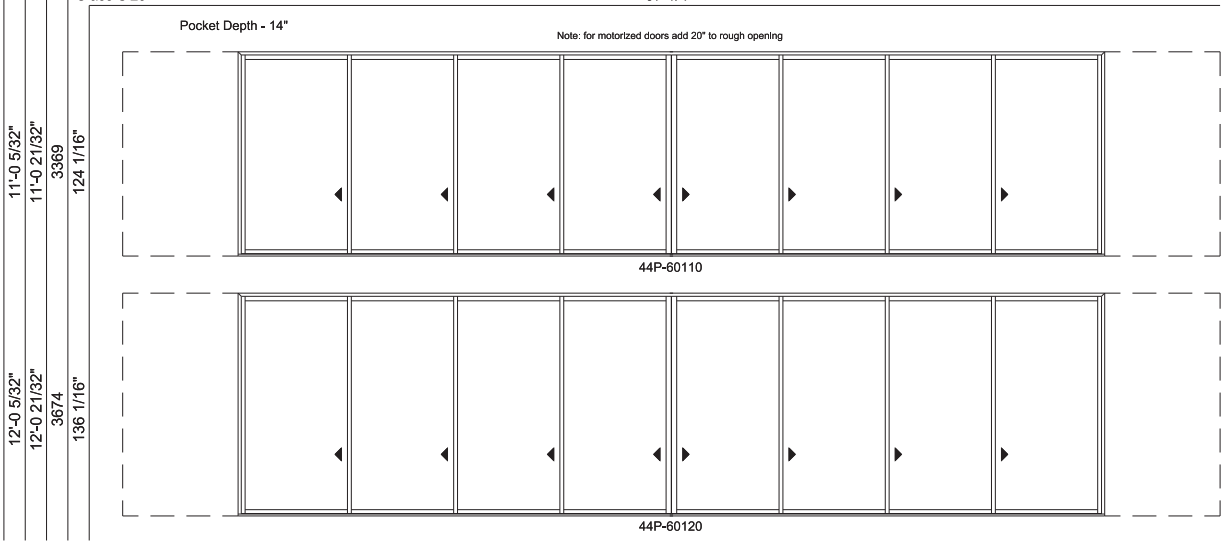

Not to scale.

Multi-Slide Doors - 2-1/4" Panel (4701) 5L5R Panel

Jamb Dimension				28'-2 1/8"	38'-2 1/8"
	Rough Opening			28'-3 1/8"	38'-3 1/8"
		Soft Metric R.O. (mm)		8614	11662
			Glass Size	31 1/4"	43 1/4"
6'-7 21/32"	6'-8 5/32"	2036	71 9/16"		
6'-10 5/32"	6'-10 21/32"	2099	74 1/16"		
7'-2 5/32"	7'-2 21/32"	2201	78 1/16"		
8'-0 5/32"	8'-0 21/32"	2455	88 1/16"		
8'-2 5/32"	8'-2 21/32"	2506	90 1/16"		
9'-0 5/32"	9'-0 21/32"	2760	100 1/16"		
10'-0 5/32"	10'-0 21/32"	3065	112 1/16"		

Note: for motorized doors add 20" to rough opening



55-3068



55-4068



55-30610



55-40610

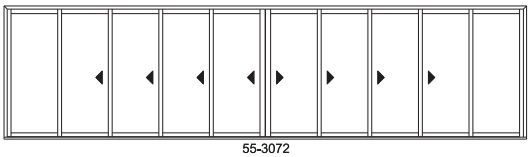

55-3072

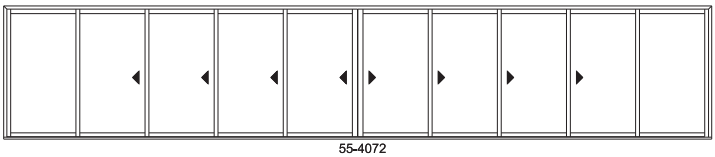

55-4072

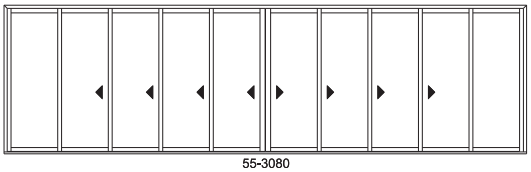

55-3080

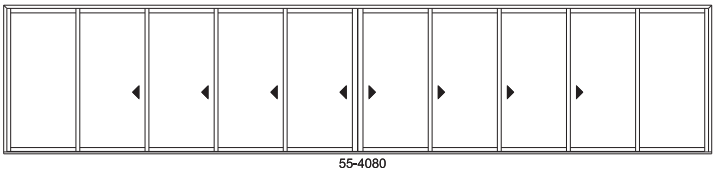

55-4080

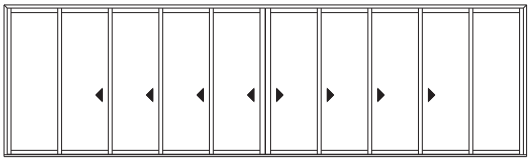

55-3082

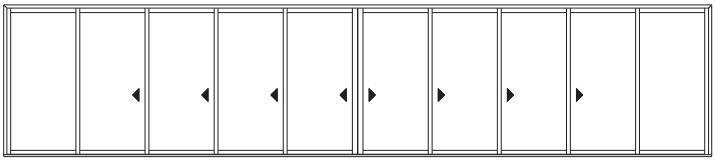

55-4082

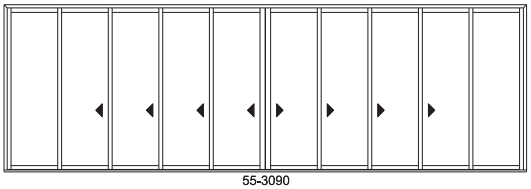

55-3090

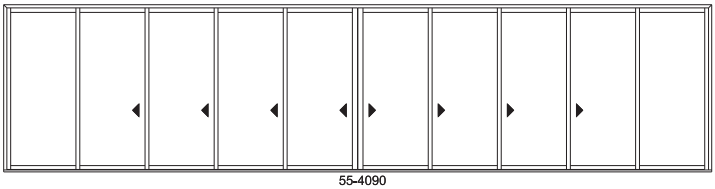

55-4090

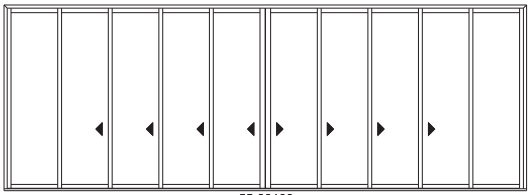

55-30100

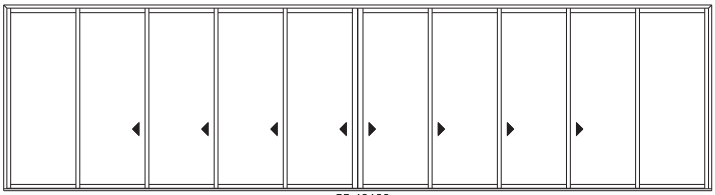

55-40100

Not to scale.

Size Tables

Multi-Slide Doors - 2-1/4" Panel (4701) 5L5R Panel

Jamb Dimension	48'-2 1/8"
Rough Opening	48'-3 1/8"
Soft Metric R.O. (mm)	14710
Glass Size	55 1/4"

Note: for motorized doors add 20" to rough opening

6'-7 21/32"	6'-8 5/32"	2036	71 9/16"	55-5068
6'-10 5/32"	6'-10 21/32"	2099	74 1/16"	55-50610
7'-2 5/32"	7'-2 21/32"	2201	78 1/16"	55-5072
8'-0 5/32"	8'-0 21/32"	2455	88 1/16"	55-5080
8'-2 5/32"	8'-2 21/32"	2506	90 1/16"	55-5082
9'-0 5/32"	9'-0 21/32"	2760	100 1/16"	55-5090
10'-0 5/32"	10'-0 21/32"	3065	112 1/16"	55-50100

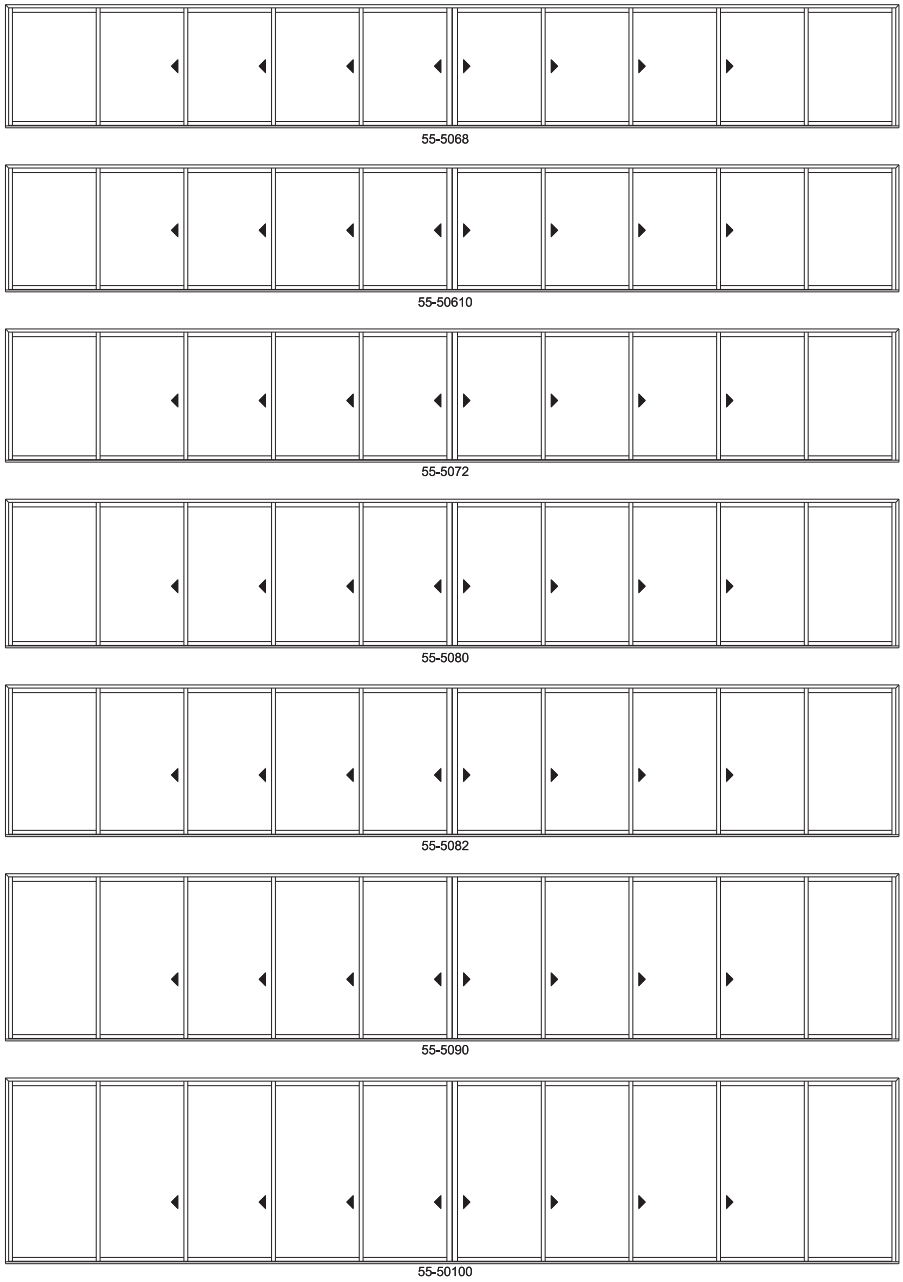

Not to scale.

Multi-Slide Doors - 2-1/4" Panel (4701) 5L5R Panel

Jamb Dimension	58'-2 1/8"
Rough Opening	58'-3 1/8"
Soft Metric R.O. (mm)	17758
Glass Size	67 1/4"

Note: for motorized doors add 20" to rough opening

6'-7 21/32"	6'-8 5/32"	2036	71 9/16"	55-6068					
6'-10 5/32"	6'-10 21/32"	2099	74 1/16"	55-60610					
7'-2 5/32"	7'-2 21/32"	2201	78 1/16"	55-6072					
8'-0 5/32"	8'-0 21/32"	2455	88 1/16"	55-6080					
8'-2 5/32"	8'-2 21/32"	2506	90 1/16"	55-6082					
9'-0 5/32"	9'-0 21/32"	2760	100 1/16"	55-6090					
10'-0 5/32"	10'-0 21/32"	3065	112 1/16"	55-60100					

Not to scale.

Multi-Slide Doors - 2-1/4" Panel (4701) 5L5R Panel

Jamb Dimension	28'-2 1/8"	38'-2 1/8"
Rough Opening	28'-3 1/8"	38'-3 1/8"
Soft Metric R.O. (mm)	8614	11662
Glass Size	31 1/4"	43 1/4"

Note: for motorized doors add 20" to rough opening

11'-0 5/32" | 11'-0 21/32" | 3369 | 124 1/16"

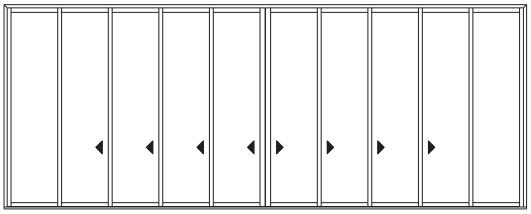

55-30110

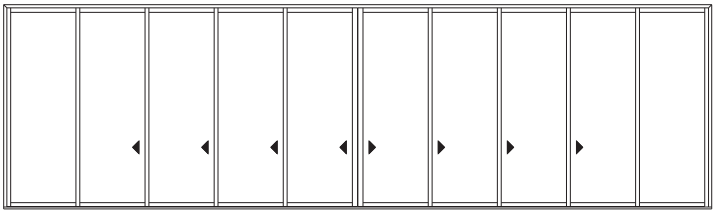

55-40110

12'-0 5/32" | 12'-0 21/32" | 3674 | 136 1/16"

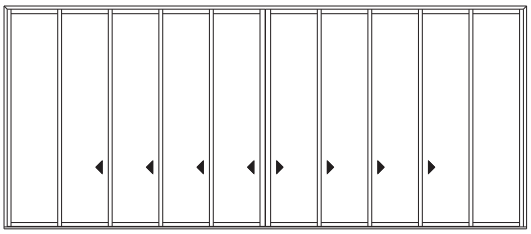

55-30120

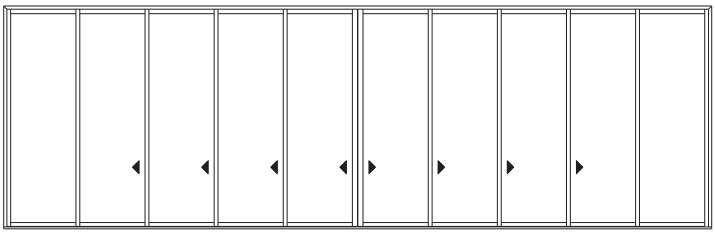

55-40120

Multi-Slide Doors - 2-1/4" Panel (4701) 5L5R Panel

Jamb Dimension	48'-2 1/8"
Rough Opening	48'-3 1/8"
Soft Metric R.O. (mm)	14710
Glass Size	55 1/4"

Note: for motorized doors add 20" to rough opening

11'-0 5/32" | 11'-0 21/32" | 3369 | 124 1/16"

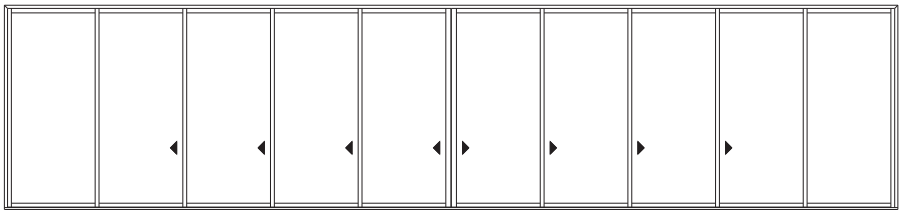

55-50110

12'-0 5/32" | 12'-0 21/32" | 3674 | 136 1/16"

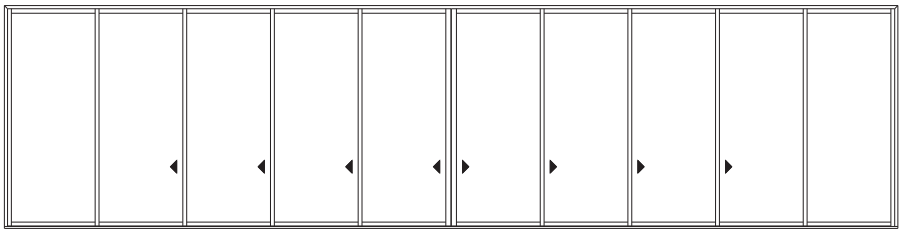

55-50120

Not to scale.

Multi-Slide Doors - 2-1/4" Panel (4701) 5L5R Panel

Jamb Dimension	58'-2 1/8"
Rough Opening	58'-3 1/8"
Soft Metric R.O. (mm)	17758
Glass Size	67 1/4"

Note: for motorized doors add 20" to rough opening

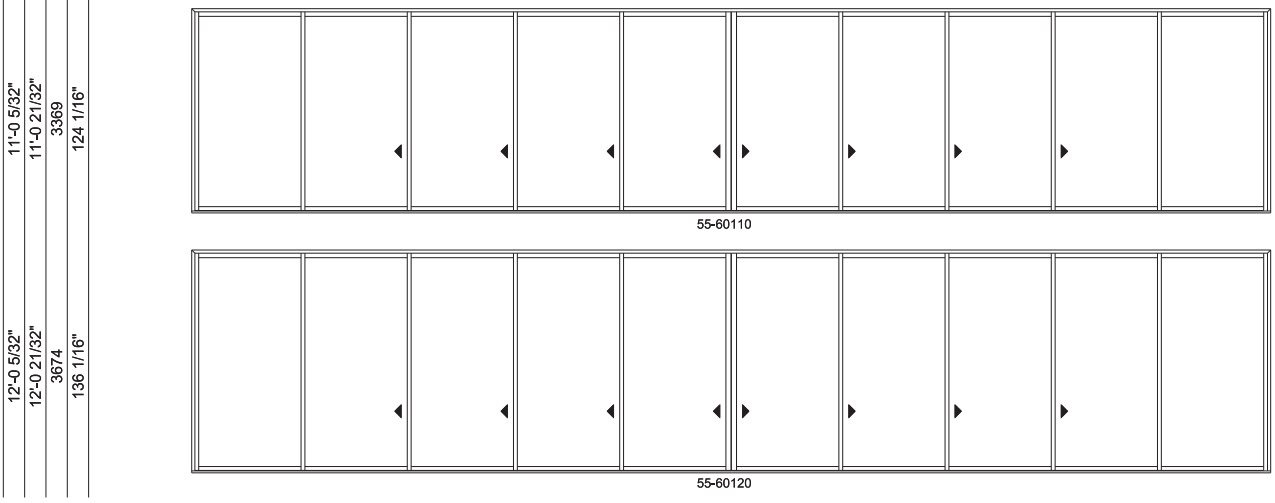

Not to scale.

Size Tables

Multi-Slide Doors - 2-1/4" Panel (4701) 5L5R Panel Pocket

Exposed Jamb Width	28'-2 3/32"
Exposed RO Width	28'-2 15/32"
Pocket Width	3'-3"
Jamb Dimension	34'-7 15/32"
Rough Opening	34'-8 15/32"
Soft Metric R.O. (mm)	10578
Glass Size	31 1/4"

Pocket Depth - 17"

Note: for motorized doors add 20" to rough opening

6'-7 21/32"	6'-10 5/32"	7'-2 5/32"	8'-0 5/32"	8'-2 5/32"	9'-0 5/32"	10'-0 5/32"				
6'-8 5/32"	6'-10 21/32"	7'-2 21/32"	8'-0 21/32"	8'-2 21/32"	9'-0 21/32"	10'-0 21/32"				
2036	2099	2201	2455	2506	2760	3065				
71 9/16"	74 1/16"	78 1/16"	88 1/16"	90 1/16"	100 1/16"	112 1/16"				

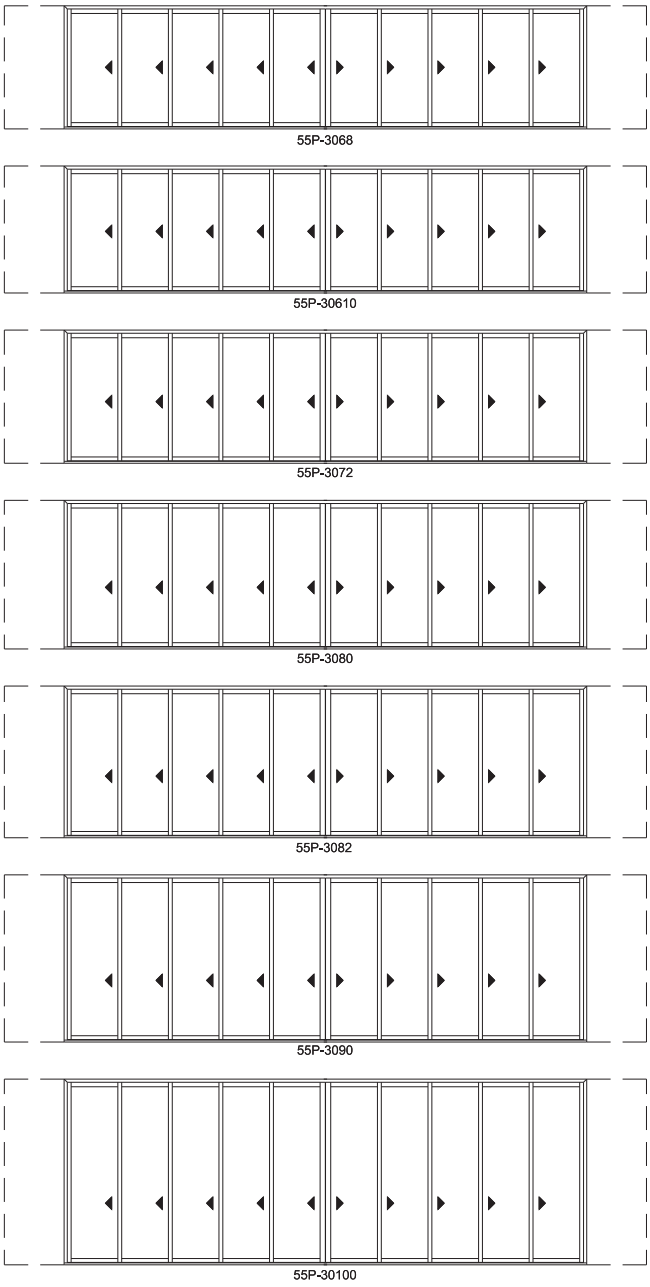

Not to scale.

Size Tables

Multi-Slide Doors - 2-1/4" Panel (4701) 5L5R Panel Pocket

Exposed Jamb Width	38'-2 3/32"
Exposed RO Width	38'-2 15/32"
Pocket Width	4'-3"
Jamb Dimension	46'-7 15/32"
Rough Opening	46'-8 15/32"
Soft Metric R.O. (mm)	14236
Glass Size	43 1/4"

Pocket Depth - 17"

Note: for motorized doors add 20" to rough opening

6'-7 21/32"	6'-8 5/32"	2036	71 9/16"	55P-4068
6'-10 5/32"	6'-10 21/32"	2099	74 1/16"	55P-40610
7'-2 5/32"	7'-2 21/32"	2201	78 1/16"	55P-4072
8'-0 5/32"	8'-0 21/32"	2455	88 1/16"	55P-4080
8'-2 5/32"	8'-2 21/32"	2506	90 1/16"	55P-4082
9'-0 5/32"	9'-0 21/32"	2760	100 1/16"	55P-4090
10'-0 5/32"	10'-0 21/32"	3065	112 1/16"	55P-40100

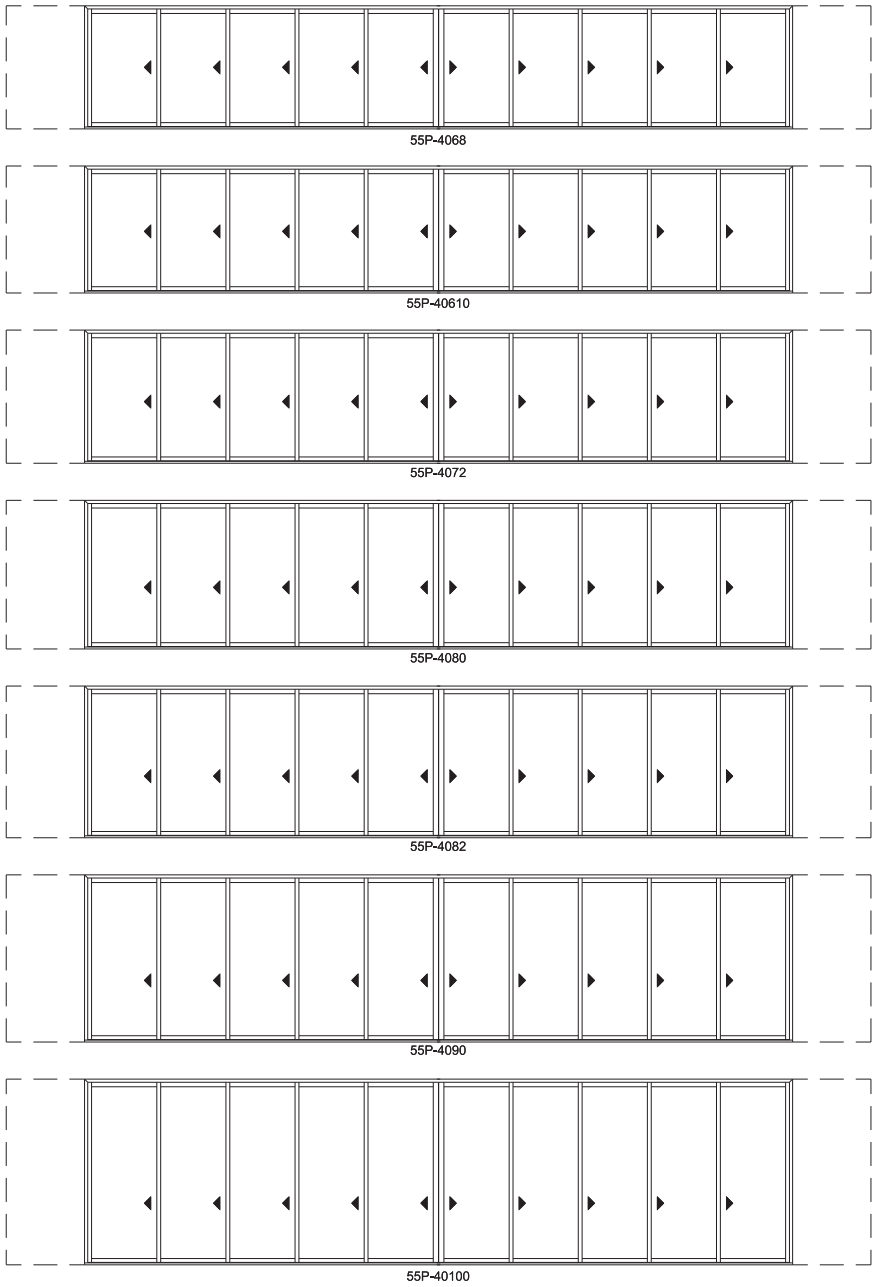

Not to scale.

Multi-Slide Doors - 2-1/4" Panel (4701) 5L5R Panel Pocket

Exposed Jamb Width	48'-2 3/32"
Exposed RO Width	48'-2 15/32"
Pocket Width	5'-3"
Jamb Dimension	58'-7 15/32"
Rough Opening	58'-8 15/32"
Soft Metric R.O. (mm)	17894
Glass Size	55 1/4"

Pocket Depth - 17"

Note: for motorized doors add 20" to rough opening

6'-7 21/32"	6'-10 5/32"	7'-2 5/32"	8'-0 5/32"	8'-2 5/32"	9'-0 5/32"	10'-0 5/32"				
6'-8 5/32"	6'-10 21/32"	7'-2 21/32"	8'-0 21/32"	8'-2 21/32"	9'-0 21/32"	10'-0 21/32"				
2036	2099	2201	2455	2506	2760	3065				
71 9/16"	74 1/16"	78 1/16"	88 1/16"	90 1/16"	100 1/16"	112 1/16"				

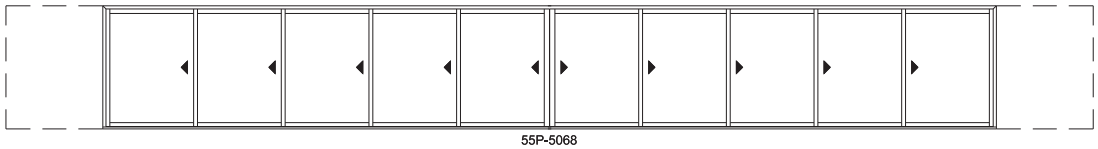

55P-5068

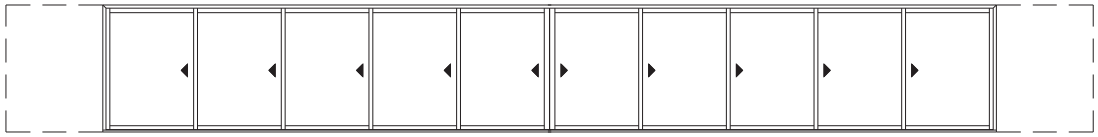

55P-50610

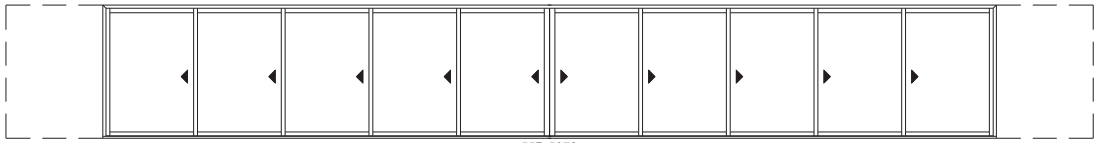

55P-5072

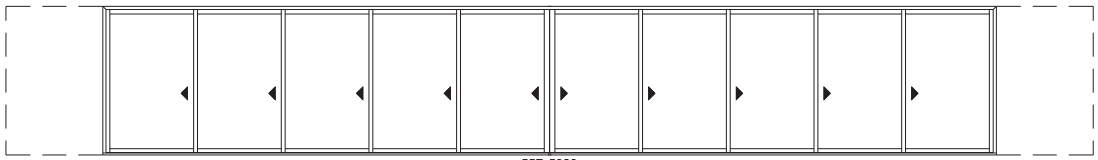

55P-5080

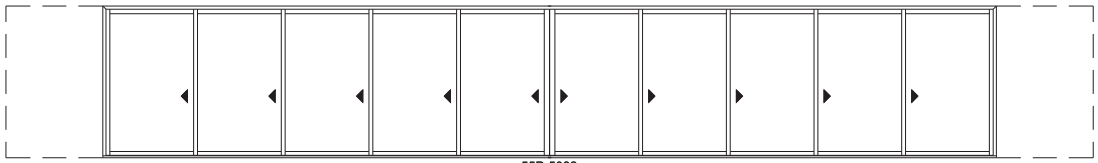

55P-5082

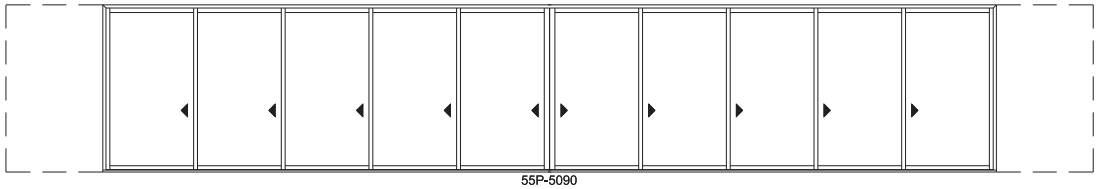

55P-5090

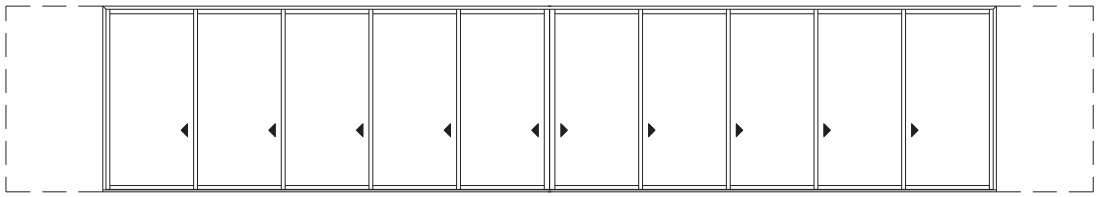

55P-50100

Not to scale.

Multi-Slide Doors - 2-1/4" Panel (4701) 5L5R Panel Pocket

Exposed Jamb Width	58'-2 3/32"
Exposed RO Width	58'-2 15/32"
Pocket Width	6'-3"
Jamb Dimension	70'-7 15/32"
Rough Opening	70'-8 15/32"
Soft Metric R.O. (mm)	21551
Glass Size	67 1/4"

Pocket Depth - 17"

Note: for motorized doors add 20" to rough opening

6'-7 21/32"	6'-8 5/32"	2036	71 9/16"
6'-10 5/32"	6'-10 21/32"	2099	74 1/16"
7'-2 5/32"	7'-2 21/32"	2201	78 1/16"
8'-0 5/32"	8'-0 21/32"	2455	88 1/16"
8'-2 5/32"	8'-2 21/32"	2506	90 1/16"
9'-0 5/32"	9'-0 21/32"	2760	100 1/16"
10'-0 5/32"	10'-0 21/32"	3065	112 1/16"

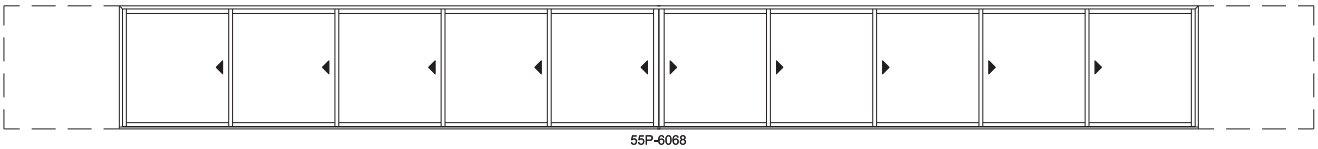

55P-6068

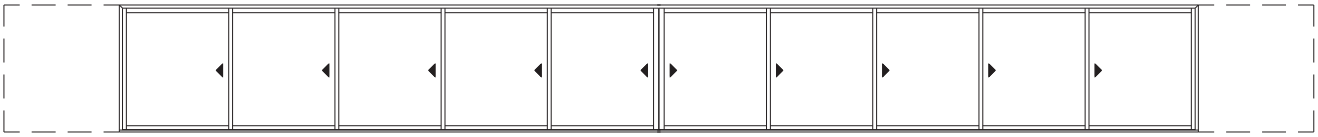

55P-60610

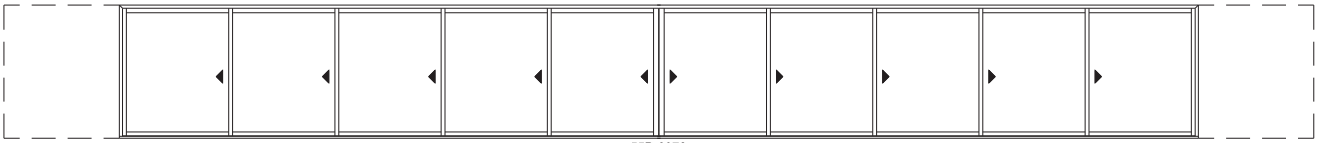

55P-6072

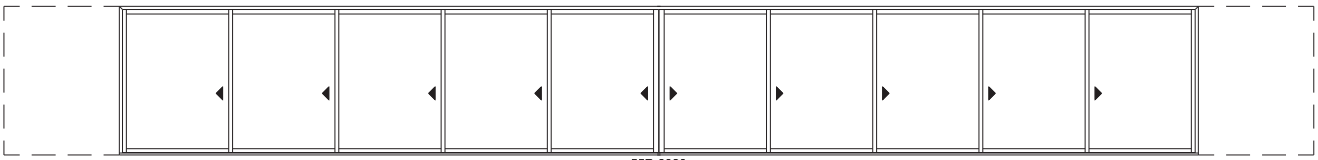

55P-6080

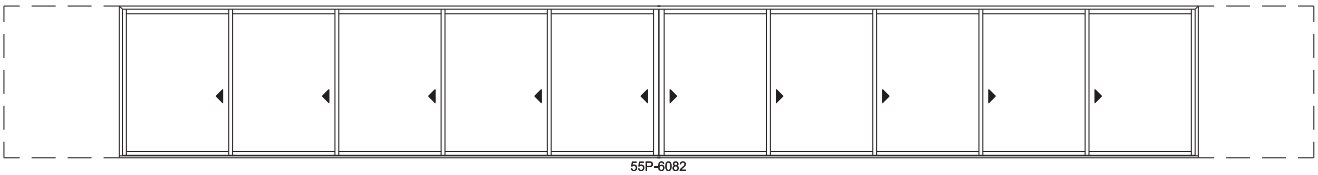

55P-6082

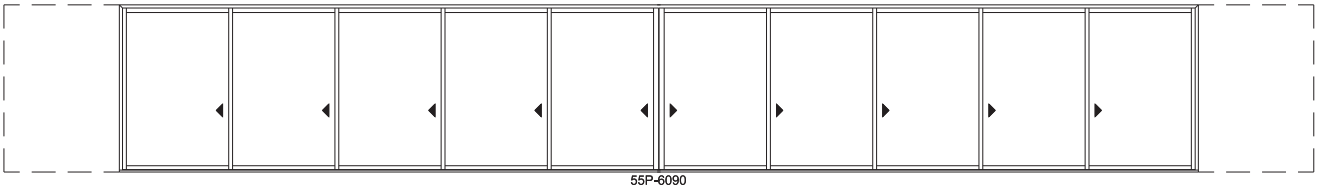

55P-6090

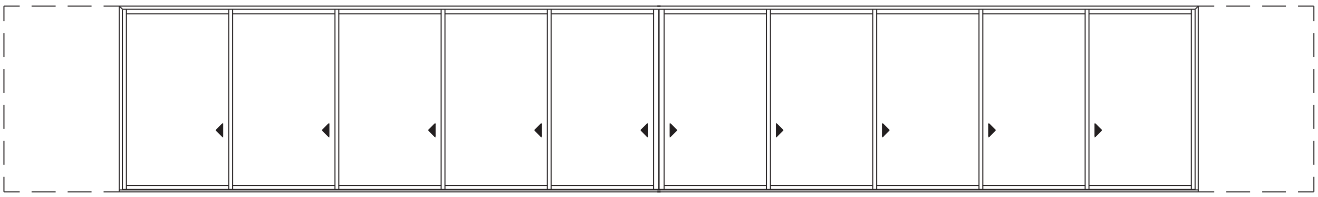

55P-60100

Not to scale.

Multi-Slide Doors - 2-1/4" Panel (4701) 5L5R Panel Pocket

Exposed Jamb Width	28'-2 3/32"
Exposed RO Width	28'-2 15/32"
Pocket Width	3'-3"
Jamb Dimension	34'-7 15/32"
Rough Opening	34'-8 15/32"
Soft Metric R.O. (mm)	10578
Glass Size	31 1/4"

Pocket Depth - 17"

Note: for motorized doors add 20" to rough opening

11'-0 5/32"
11'-0 21/32"
3369
124 1/16"

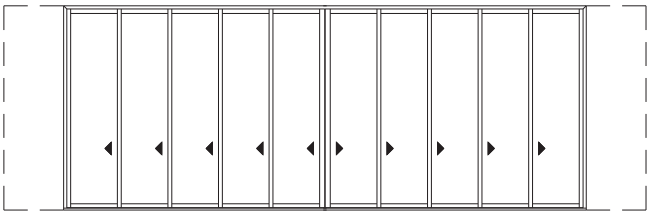

55P-30110

12'-0 5/32"
12'-0 21/32"
3674
136 1/16"

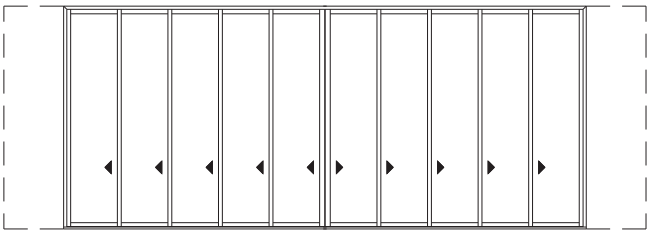

55P-30120

Multi-Slide Doors - 2-1/4" Panel (4701) 5L5R Panel Pocket

Exposed Jamb Width	38'-2 3/32"
Exposed RO Width	38'-2 15/32"
Pocket Width	4'-3"
Jamb Dimension	46'-7 15/32"
Rough Opening	46'-8 15/32"
Soft Metric R.O. (mm)	14236
Glass Size	43 1/4"

Pocket Depth - 17"

Note: for motorized doors add 20" to rough opening

11'-0 5/32"
11'-0 21/32"
3369
124 1/16"

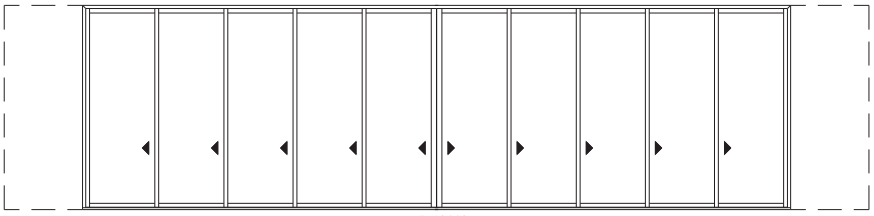

55P-40110

12'-0 5/32"
12'-0 21/32"
3674
136 1/16"

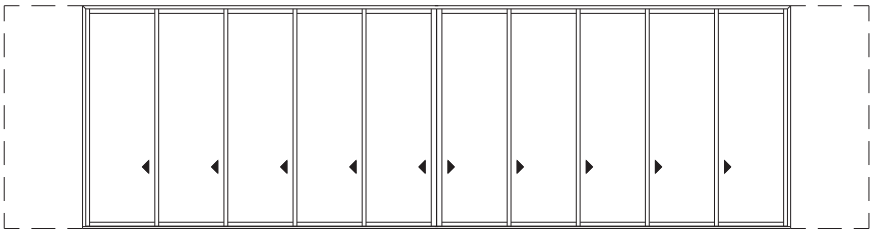

55P-40120

Not to scale.

Multi-Slide Doors - 2-1/4" Panel (4701) 5L5R Panel Pocket

Exposed Jamb Width	48'-2 3/32"
Exposed RO Width	48'-2 15/32"
Pocket Width	5'-3"
Jamb Dimension	58'-7 15/32"
Rough Opening	58'-8 15/32"
Soft Metric R.O. (mm)	17894
Glass Size	55 1/4"

Pocket Depth - 17"

Note: for motorized doors add 20" to rough opening

11'-0 5/32" | 11'-0 21/32" | 3369 | 124 1/16"

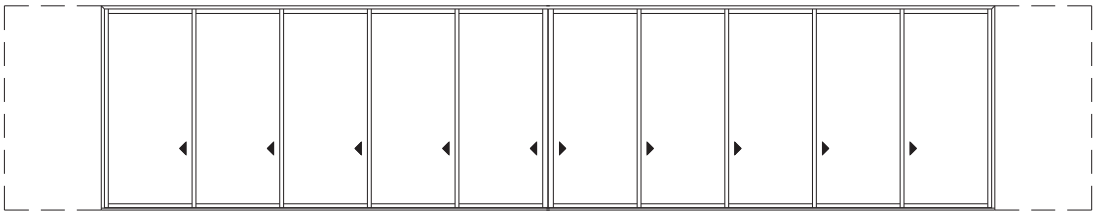

55P-50110

12'-0 5/32" | 12'-0 21/32" | 3674 | 136 1/16"

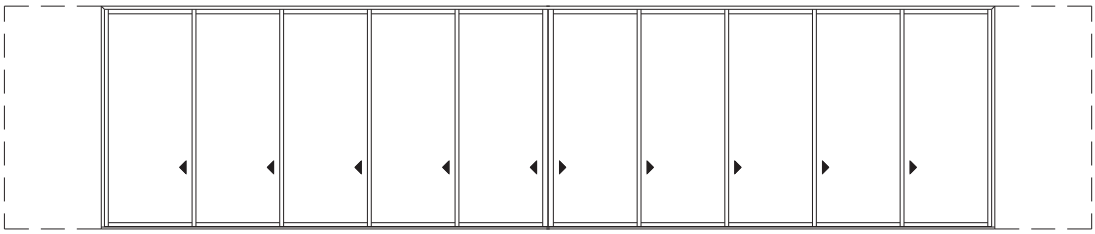

55P-50120

Multi-Slide Doors - 2-1/4" Panel (4701) 5L5R Panel Pocket

Exposed Jamb Width	58'-2 3/32"
Exposed RO Width	58'-2 15/32"
Pocket Width	6'-3"
Jamb Dimension	70'-7 15/32"
Rough Opening	70'-8 15/32"
Soft Metric R.O. (mm)	21551
Glass Size	67 1/4"

Pocket Depth - 17"

Note: for motorized doors add 20" to rough opening

11'-0 5/32" | 11'-0 21/32" | 3369 | 124 1/16"

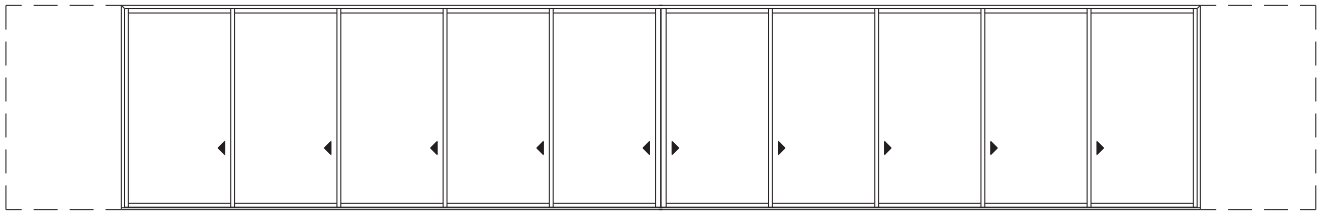

55P-60110

12'-0 5/32" | 12'-0 21/32" | 3674 | 136 1/16"

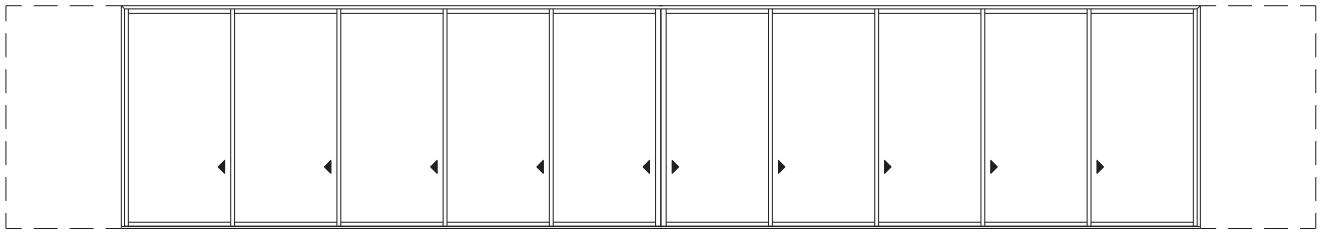

55P-60120

Not to scale.

Vista Series Premium Aluminum Multi-Slide Doors

Design Data - Stacking Panels

4701 HEIGHTS - STANDARD SILL

Call Out Panel Size	R.O.	JAMB HEIGHT	PANEL HEIGHT	GLASS HEIGHT	DLO HEIGHT
6-8	80.156	79.656	76.530	71.561	70.530
6-10	82.656	82.156	79.030	74.061	73.030
7-2	86.656	86.156	83.030	78.061	77.030
8-0	96.656	96.156	93.030	88.061	87.030
8-2	98.656	98.156	95.030	90.061	89.030
9-0	108.656	108.156	105.030	100.061	99.030
10-0	120.656	120.156	117.030	112.061	111.030
11-0	132.656	132.156	129.030	124.061	123.030
12-0	144.656	144.156	141.030	136.061	135.030

4701 HEIGHTS - T-TRACK SILL

Call Out Panel Size	R.O.	JAMB HEIGHT	PANEL HEIGHT	GLASS HEIGHT	DLO HEIGHT
6-8	81.798	80.477	76.437	67.187	66.187
6-10	84.298	82.977	78.937	69.687	68.687
7-2	88.298	86.977	82.937	73.687	72.687
8-0	98.298	96.977	92.937	83.687	82.687
8-2	100.298	98.977	94.937	85.687	84.687
9-0	110.298	108.977	104.937	95.687	94.687
10-0	122.298	120.977	116.937	107.687	106.687
11-0	134.298	132.977	128.937	119.687	118.687
12-0	146.298	144.977	140.937	131.687	130.687

If PANEL HEIGHT > 120" the max PANEL WIDTH is 60"

	STACKING PANEL CONFIGURATION	Venting	Jamb Depth	Rough Opening Width	Frame Width	Panel Width	Interlocker Panel Width	Meeting Stile Panel Width	Glass Width	DLO Width
2-Panel		One-way	6.922	48.986	47.986	23.993	n/a	n/a	19.250	18.219
				58.986	57.986	28.993	n/a	n/a	24.250	23.219
				72.986	71.986	35.993	n/a	n/a	31.250	30.219
				96.986	95.986	47.993	n/a	n/a	43.250	42.219
				120.986	119.986	59.993	n/a	n/a	55.250	54.219
				144.986	143.986	71.993	n/a	n/a	67.250	66.219
3-Panel		One-way	9.922	69.704	68.704	23.993	23.218	n/a	19.250	18.219
				84.704	83.704	28.993	28.218	n/a	24.250	23.219
				105.704	104.704	35.993	35.218	n/a	31.250	30.219
				141.704	140.704	47.993	47.218	n/a	43.250	42.219
				177.704	176.704	59.993	59.218	n/a	55.250	54.219
				213.704	212.704	71.993	71.218	n/a	67.250	66.219
4-Panel	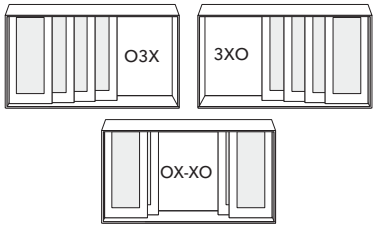	One-way	12.922	90.422	89.422	23.993	23.218	n/a	19.250	18.219
				110.422	109.422	28.993	28.218	n/a	24.250	23.219
				138.422	137.422	35.993	35.218	n/a	31.250	30.219
				186.422	185.422	47.993	47.218	n/a	43.250	42.219
				234.422	233.422	59.993	59.218	n/a	55.250	54.219
				282.422	281.422	71.993	71.218	n/a	67.250	66.219
		Bi-part	6.922	94.8125	93.8125	23.993	n/a	23.375	19.3125	18.226
				114.8125	113.8125	28.993	n/a	28.375	24.3125	23.226
				142.8125	141.8125	35.993	n/a	35.375	31.3125	30.226
				190.8125	189.8125	47.993	n/a	47.375	43.3125	42.226
				238.8125	237.8125	59.993	n/a	59.375	55.3125	54.226
				286.8125	285.8125	71.993	n/a	71.375	67.3125	66.226
5-Panel		One-way	15.922	111.140	110.140	23.993	23.218	n/a	19.250	18.219
				136.140	135.140	28.993	28.218	n/a	24.250	23.219
				171.140	170.140	35.993	35.218	n/a	31.250	30.219
				231.140	230.140	47.993	47.218	n/a	43.250	42.219
				291.140	290.140	59.993	59.218	n/a	55.250	54.219
				351.140	350.140	71.993	71.218	n/a	67.250	66.219

X = Venting, O = Fixed. All dimensions are in inches.

Non-motorized dimensions shown.

Custom sized units in 1/8" increments.

Doors are viewed from the exterior.

Contact your local Pella sales representative for more information.

Design Data - Stacking Panels

STACKING PANEL CONFIGURATION		Venting	Track Depth	Rough Opening Width	Frame Width	Panel Width	Interlocker Panel Width	Meeting Stile Panel Width	Glass Width	DLO Width
6-panel		One-way	18.922	131.858	130.858	23.993	23.218	n/a	19.250	18.219
				161.858	160.858	28.993	28.218	n/a	24.250	23.219
				203.858	202.858	35.993	35.218	n/a	31.250	30.219
				275.858	274.858	47.993	47.218	n/a	43.250	42.219
				347.858	346.858	59.993	59.218	n/a	55.250	54.219
				419.858	418.858	71.993	71.218	n/a	67.250	66.219
		Bi-part	9.922	136.3125	135.3125	24.000	23.375	23.250	19.3125	18.226
				166.3125	165.3125	29.000	28.375	28.250	24.3125	23.226
				208.3125	207.3125	36.000	35.375	35.250	31.3125	30.226
				280.3125	279.3125	48.000	47.375	47.250	43.3125	42.226
				352.3125	351.3125	60.000	59.375	59.250	55.3125	54.226
				424.3125	423.3125	72.000	71.375	71.250	67.3125	66.226
8-Panel		Bi-part	12.922	177.8125	176.8125	24.000	23.375	23.25	19.3125	18.226
				217.8125	216.8125	29.000	28.375	28.25	24.3125	23.226
				273.8125	272.8125	36.000	35.375	35.25	31.3125	30.226
				369.8125	368.8125	48.000	47.375	47.25	43.3125	42.226
				465.8125	464.8125	60.000	59.375	59.25	55.3125	54.226
				561.8125	560.8125	72.000	71.375	71.25	67.3125	66.226
10-Panel		Bi-part	15.922	219.3125	218.3125	24.000	23.375	23.250	19.3125	18.226
				269.3125	268.3125	29.000	28.375	28.250	24.3125	23.226
				339.3125	338.3125	36.000	35.375	35.250	31.3125	30.226
				459.3125	458.3125	48.000	47.375	47.250	43.3125	42.226
				579.3125	578.3125	60.000	59.375	59.250	55.3125	54.226
				699.3125	698.3125	72.000	71.375	71.250	67.3125	66.226

X = Venting, O = Fixed. All dimensions are in inches.

Non-motorized dimensions shown.

Custom sized units in 1/8" increments.

Doors are viewed from the exterior.

Contact your local Pella sales representative for more information.

Design Data - Pocketing Panels

	POCKETING PANEL CONFIGURATION	Venting	Track Depth	Rough Opening Width	Frame Width	Panel Width	Interlocker Panel Width	Meeting Stile Panel Width	Glass Width	DLO Width	Pocket Wall	Pocket Depth
1-Panel		One-way	5.92	54.1735	53.1735	23.993	n/a	n/a	19.3055	18.219	26.993	5.0
				64.1735	63.1735	28.993	n/a	n/a	24.3055	23.219	31.993	
				78.1735	77.1735	35.993	n/a	n/a	31.3055	30.219	38.993	
				102.1735	101.1735	47.993	n/a	n/a	43.3055	42.219	50.993	
				126.1735	125.1735	59.993	n/a	n/a	55.3055	54.219	62.993	
				150.1735	149.1735	71.993	n/a	n/a	67.3055	66.219	74.993	
2-Panel		One-way	6.922	75.6665	74.6665	23.993	n/a	n/a	19.3055	18.219	26.993	8.0
				90.6665	89.6665	28.993	n/a	n/a	24.3055	23.219	31.993	
				111.6665	110.6665	35.993	n/a	n/a	31.3055	30.219	38.993	
				147.6665	146.6665	47.993	n/a	n/a	43.3055	42.219	50.993	
				183.6665	182.6665	59.993	n/a	n/a	55.3055	54.219	62.993	
				219.6665	218.6665	71.993	n/a	n/a	67.3055	66.219	74.993	
		Bi-part	5.922	54.1735	53.1735	23.993	n/a	n/a	19.3055	18.219	26.993	5.0
				64.1735	63.1735	28.993	n/a	n/a	24.3055	23.219	31.993	
				78.1735	77.1735	35.993	n/a	n/a	31.3055	30.219	38.993	
				102.1735	101.1735	47.993	n/a	n/a	43.3055	42.219	50.993	
				126.1735	125.1735	59.993	n/a	n/a	55.3055	54.219	62.993	
				150.1735	149.1735	71.993	n/a	n/a	67.3055	66.219	74.993	
3-Panel		One-way	9.922	96.385	95.385	23.993	23.2180	n/a	19.2500	18.219	26.993	11.0
				116.385	115.385	28.993	28.2180	n/a	24.2500	23.219	31.993	
				144.385	143.385	35.993	35.2180	n/a	31.2500	30.219	38.993	
				192.385	191.385	47.993	47.2180	n/a	43.2500	42.219	50.993	
				240.385	239.385	59.993	59.2180	n/a	55.2500	54.219	62.993	
				288.385	287.385	71.993	71.2180	n/a	67.2500	66.219	74.993	
4-Panel	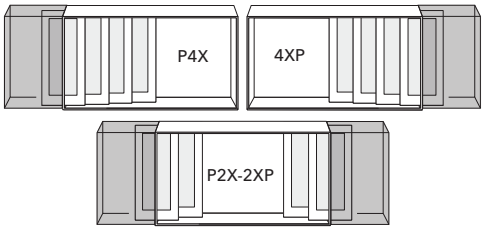	One-way	12.922	140.321	139.321	23.993	23.2180	n/a	19.2500	18.219	26.993	14.0
				170.321	169.321	28.993	28.2180	n/a	24.2500	23.219	31.993	
				212.321	211.321	35.993	35.2180	n/a	31.2500	30.219	38.993	
				284.321	283.321	47.993	47.2180	n/a	43.2500	42.219	50.993	
				356.321	355.321	59.993	59.2180	n/a	55.2500	54.219	62.993	
				428.321	427.321	71.993	71.2180	n/a	67.2500	66.219	74.993	
		Bi-part	6.922	148.1875	147.1875	24.000	n/a	23.375	19.3125	18.226	27.000	8.0
				178.1875	177.1875	29.000	n/a	28.375	24.3125	23.226	32.000	
				220.1875	219.1875	36.000	n/a	35.375	31.3125	30.226	39.000	
				292.1875	291.1875	48.000	n/a	47.375	43.3125	42.226	51.000	
				364.1875	363.1875	60.000	n/a	59.375	55.3125	54.226	63.000	
				436.1875	435.1875	72.000	n/a	71.375	67.3125	66.226	75.000	
5-Panel		One-way	15.922	137.821	136.821	23.993	23.2180	n/a	19.2500	18.219	26.993	17.0
				167.821	166.821	28.993	28.2180	n/a	24.2500	23.219	31.993	
				209.821	208.821	35.993	35.2180	n/a	31.2500	30.219	38.993	
				281.821	280.821	47.993	47.2180	n/a	43.2500	42.219	50.993	
				353.821	352.821	59.993	59.2180	n/a	55.2500	54.219	62.993	
				425.821	424.821	71.993	71.2180	n/a	67.2500	66.219	74.993	

X = Venting, O = Fixed. All dimensions are in inches.

Non-motorized dimensions shown.

Custom sized units in 1/8" increments.

Doors are viewed from the exterior.

Contact your local Pella sales representative for more information.

Design Data - Pocketing Panels

POCKETING PANEL CONFIGURATION		Venting	Track Depth	Rough Opening Width	Frame Width	Panel Width	Interlocker Panel Width	Meeting Stile Panel Width	Glass Width	DLO Width	Pocket Wall	Pocket Depth
6-Panel	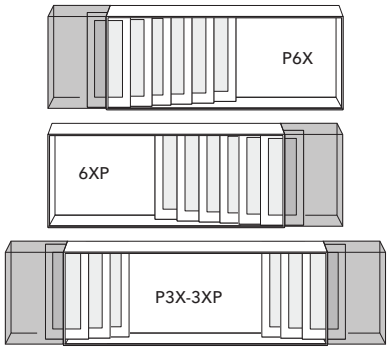	One-way	18.922	158.6385	157.6385	23.993	23.2430	n/a	19.3055	18.219	26.993	20.0
				193.6385	192.6385	28.993	28.2430	n/a	24.3055	23.219	31.993	
				242.6385	241.6385	35.993	35.2430	n/a	31.3055	30.219	38.993	
				326.6385	325.6385	47.993	47.2430	n/a	43.3055	42.219	50.993	
				410.6385	409.6385	59.993	59.2430	n/a	55.3055	54.219	62.993	
				494.6385	493.6385	71.993	71.2430	n/a	67.3055	66.219	74.993	
		Bi-part	9.922	189.6875	188.6875	24.000	23.2500	23.375	19.3125	18.226	27.0	11.0
				229.6875	228.6875	29.000	28.2500	28.375	24.3125	23.226	32.0	
				285.6875	284.6875	36.000	35.2500	35.375	31.3125	30.226	39.0	
				381.6875	380.6875	48.000	47.2500	47.375	43.3125	42.226	51.0	
				477.6875	476.6875	60.000	59.2500	59.375	55.3125	54.226	63.0	
				573.6875	572.6875	72.000	71.2500	71.375	67.3125	66.226	75.0	
8-Panel		Bi-part	12.922	231.1875	230.1875	24.000	23.2500	23.375	19.3125	18.226	27.0	14.0
				281.1875	280.1875	29.000	28.2500	28.375	24.3125	23.226	32.0	
				351.1875	350.1875	36.000	35.2500	35.375	31.3125	30.226	39.0	
				471.1875	470.1875	48.000	47.2500	47.375	43.3125	42.226	51.0	
				591.1875	590.1875	60.000	59.2500	59.375	55.3125	54.226	63.0	
				711.1875	710.1875	72.000	71.2500	71.375	67.3125	66.226	75.0	
10-Panel		Bi-part	15.922	272.6875	271.6875	24.000	23.2500	23.375	19.3125	18.226	27.0	17.0
				332.6875	331.6875	29.000	28.2500	28.375	24.3125	23.226	32.0	
				416.6875	415.6875	36.000	35.2500	35.375	31.3125	30.226	39.0	
				560.6875	559.6875	48.000	47.2500	47.375	43.3125	42.226	51.0	
				704.6875	703.6875	60.000	59.2500	59.375	55.3125	54.226	63.0	
				848.6875	847.6875	72.000	71.2500	71.375	67.3125	66.226	75.0	

X = Venting, O = Fixed. All dimensions are in inches.

Non-motorized dimensions shown.

Custom sized units in 1/8" increments.

Doors are viewed from the exterior.

Contact your local Pella sales representative for more information.

Frame

- Thermally broken extruded aluminum [with integral Nail Fin with 1 inch setback] [Block frame].
- Corners are mitered and mechanically fastened with corner keys.
- Overall frame depth is 4-1/4" (108 mm) for a wall depth of 3-3/16" (81 mm).
- Sill [Standard with [1-1/4" riser] [1-1/2" riser] [2-1/2" riser] [T-Track] [Drainage T-track].

Panel

- Thermally broken extruded aluminum.
- Corners are mitered and mechanically fastened with corner keys.
- Panel thickness is 2-3/8" (61 mm).
- Panel exterior glazing profile is [Square] [Beveled] [Narrow].
- Contains sealed insulating glass.
- Includes standard sealed rollers.

Weatherstripping

- Dual weatherstripping.
- Flexible vinyl weatherstrip between frame and sash with two points of contact at rails and stiles.

Glazing System

- Quality float glass complying with ASTM C 1036.
- Silicone-glazed dual-pane 1" insulating glass [[annealed] [tempered]], [[Advanced] [SunDefense™] [SunDefense+] [NaturalSun] [NaturalSun+] [SunDefense Laminated] [Low-E 240] [Low-E 340] [with argon]].

-or-

- Silicone-glazed triple-pane 1" insulating glass [[Triple Insulated] [Triple Insulated LE 272 / Clear / LE 272] [Triple Insulated LE 272 / Clear / LE i89] [LE 366 / Clear / LE 180] [Advanced Low-E Triple] [SunDefense Triple] [with Argon]].

-or-

- Silicone-glazed triple-pane 1-9/16" insulating glass [[ES - Triple Insulated] [ES - Triple Insulated LE 272 / Clear / LE 272] [ES - Triple Insulated LE 272 / Clear / LE i89] [ES - Advanced Low-E Triple] [ES - SunDefense+ Triple] [ES - Triple Insulated LE 366 / Clear / LE180] [ES - SunDefense Triple Low-E] [with Argon]].

Exterior

- Aluminum exterior finish shall be:
  - Electrolytic two-step anodized coating, meets AAMA 611 Class 1 standard. [2]
  - Color is [standard] [custom][2].

  – or –
  - Fluoropolymer-modified acrylic topcoat over fluoropolymer primer, meets AAMA 2605 requirements.
  - Color is [standard] [custom][2].

Interior

- Aluminum Interior finish shall be:
  - Electrolytic two-step anodized coating [standard] [custom] meets AAMA 611 Class 1 standard[2].

  – or –
  - Fluoropolymer-modified acrylic topcoat over fluoropolymer primer, meets AAMA 2605 requirements.
  - Color is [standard] [custom][2].

Hardware

- 2-point locking system
- Optional Keyed locks.
- Operating Flush handles with [baked enamel [White] [Black]] [Nickel] [Rustic Bronze] hardware finish.

Optional Products

Grilles

- Simulated Divided Lite grilles
  - Interior grilles are [7/8" (29 mm)] square profile that are extruded aluminum factory finished to match sash color [2].
  - Exterior grilles are [7/8" (29 mm) [square] [beveled] profile] that are extruded aluminum factory finished to match sash color [2].
  - Patterns are [Traditional] [Prairie] [Top Row].
  - Grilles are adhered to both sides of the insulating glass with double-coated acrylic foam tape.
- Grilles-Between-the-Glass
  - Insulating glass contains [5/8" flat] [11/16" contoured] aluminum grilles permanently installed between two panes of glass.
  - Grille patterns are [Traditional] [Prairie] [Top Row].
  - Grilles are factory pre-finished finished to match sash color. [2]

Screens

Flexible Retractable screen.

- Mesh is [high-visibility vinyl-coated fiberglass (standard)] [higher strength vinyl-coated fiberglass].
- Fitted to inside of window, supplied complete with all necessary hardware.
- Screen frame finish is factory prefinished to match sash and frame color.

(1) Low-E coated insulating glass is argon-filled (except high altitude). All other insulating glass (including high altitude Low-E) is air-filled.

(2) Contact your local Pella sales representative for current designs and color options.

Unit Sections - Frame Types Overview

MULTI-SLIDE WINDOW

Standard Nailing Fin

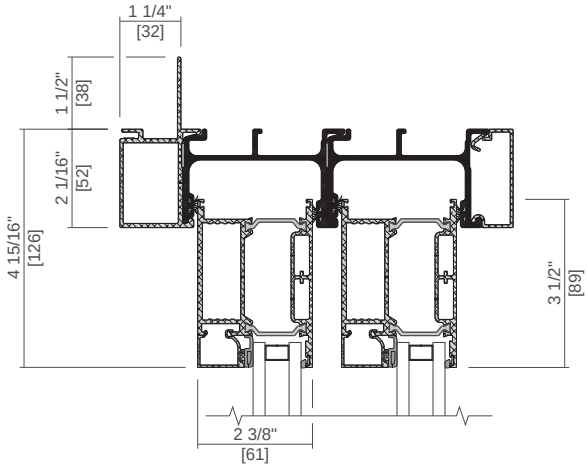

Standard Block Frame

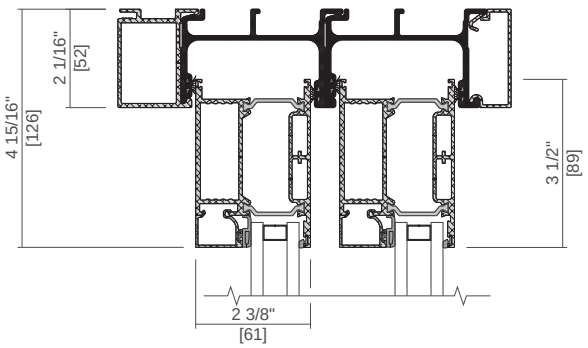

GLAZING OPTIONS

1" Dual IG

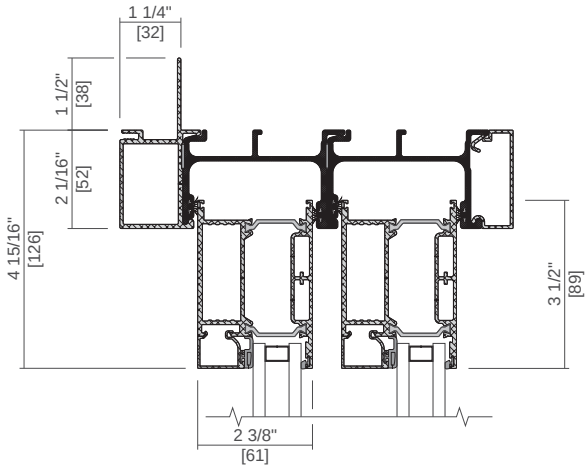

1-5/8" Triple IG

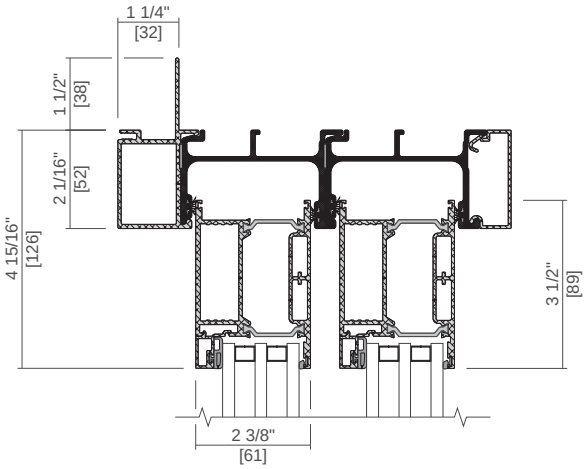

1" Laminate IG

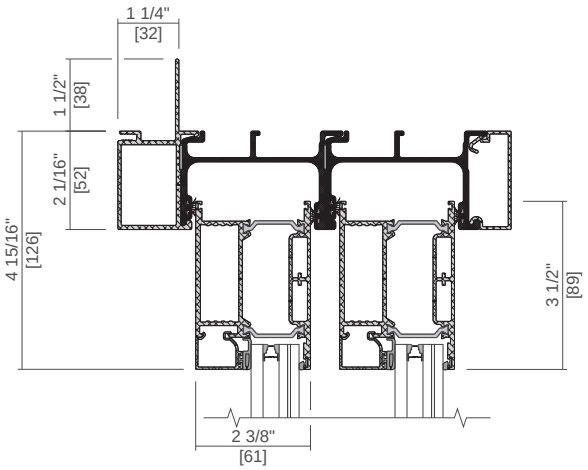

Scale 3" = 1' 0"

All dimensions are approximate.

Unit Sections

GLAZING BEAD OPTIONS

Square Bead

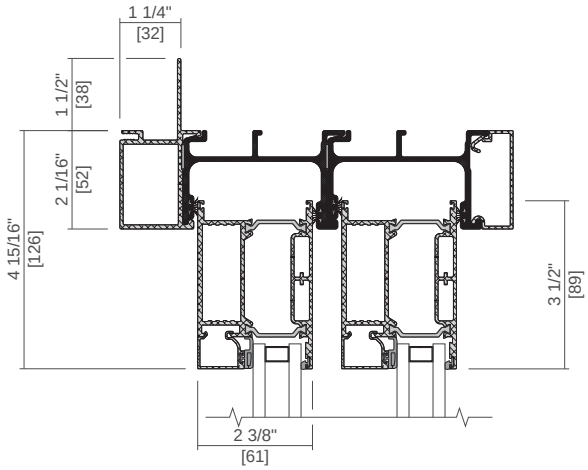

Bevel Bead

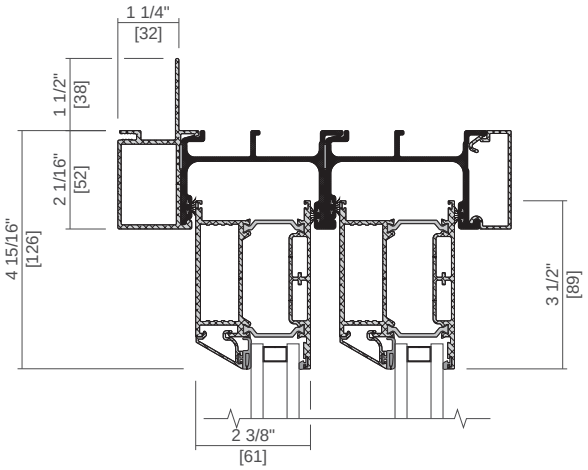

Narrow Bead

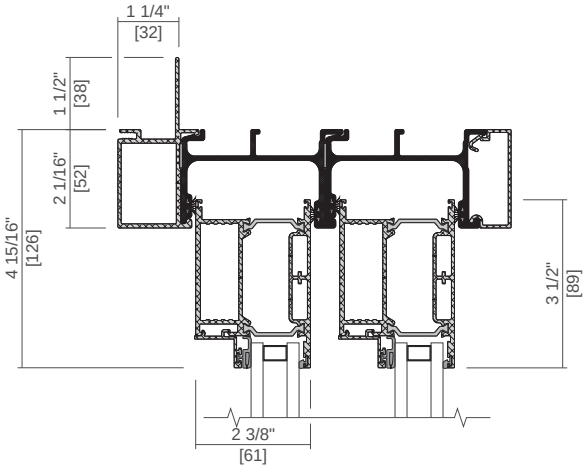

Scale 3" = 1' 0"

All dimensions are approximate.

Unit Sections

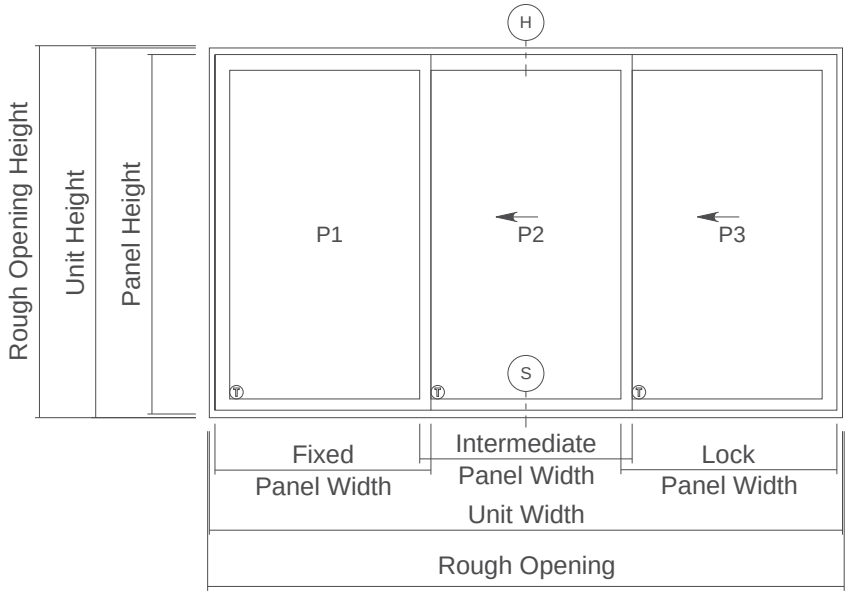



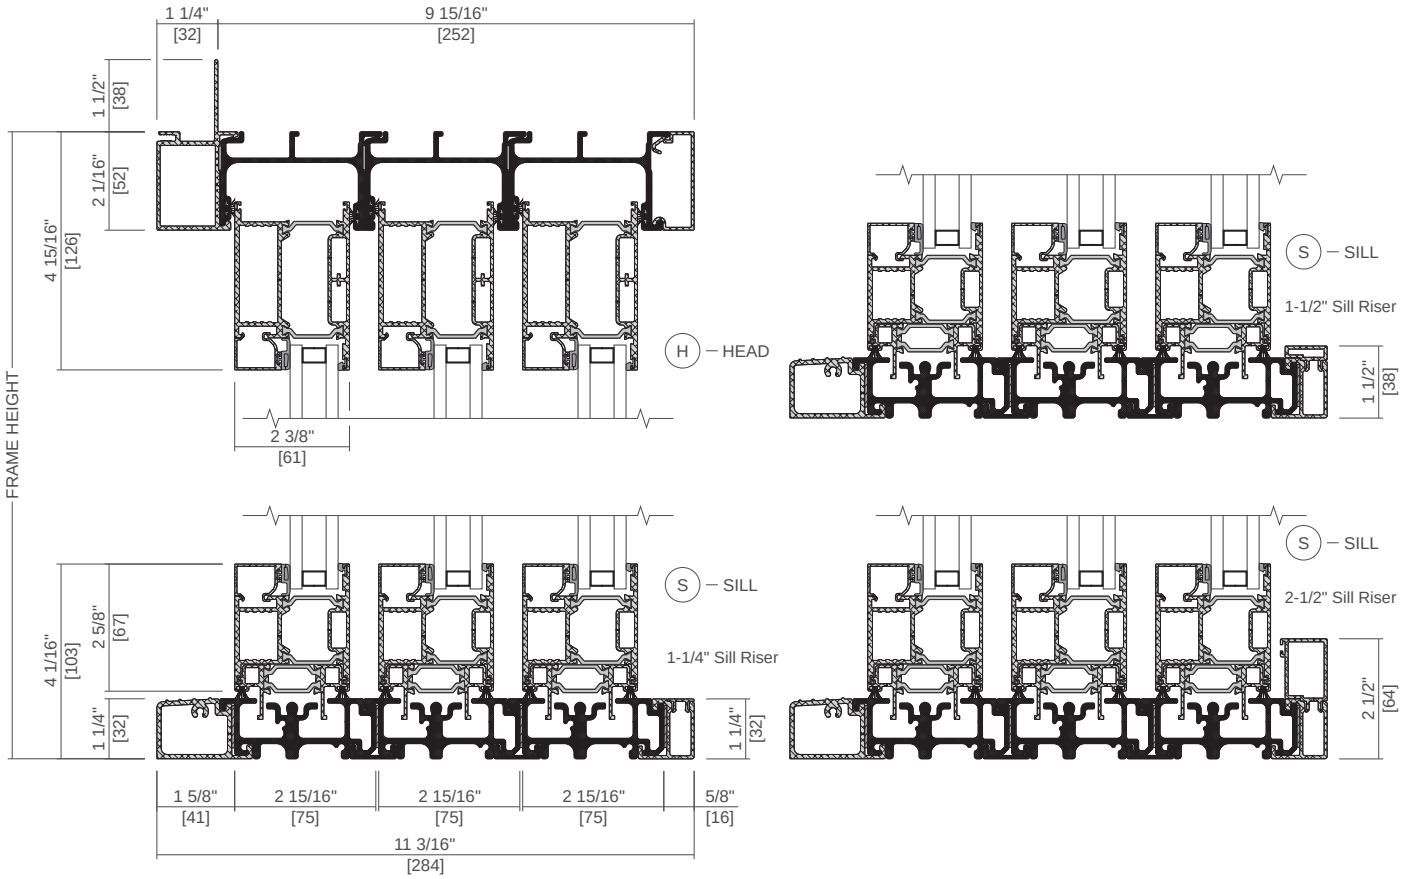

Scale 3" = 1' 0"

All dimensions are approximate.

Unit Sections

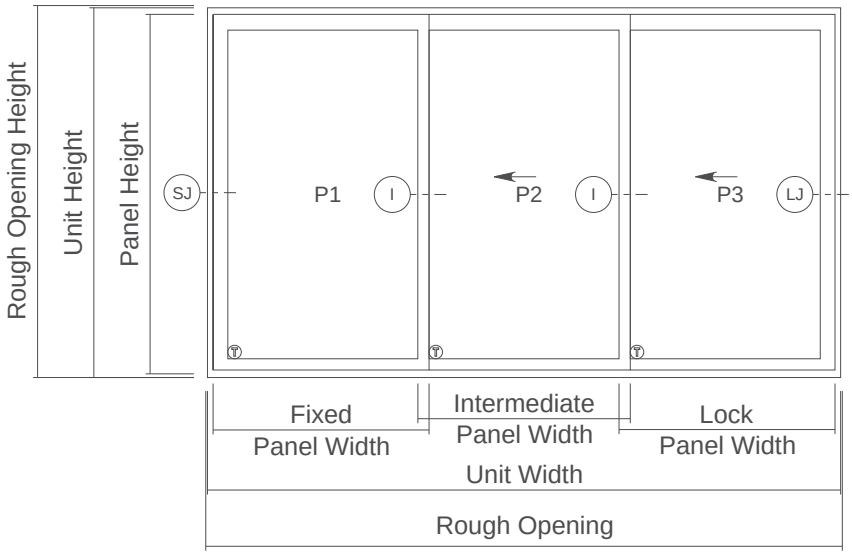



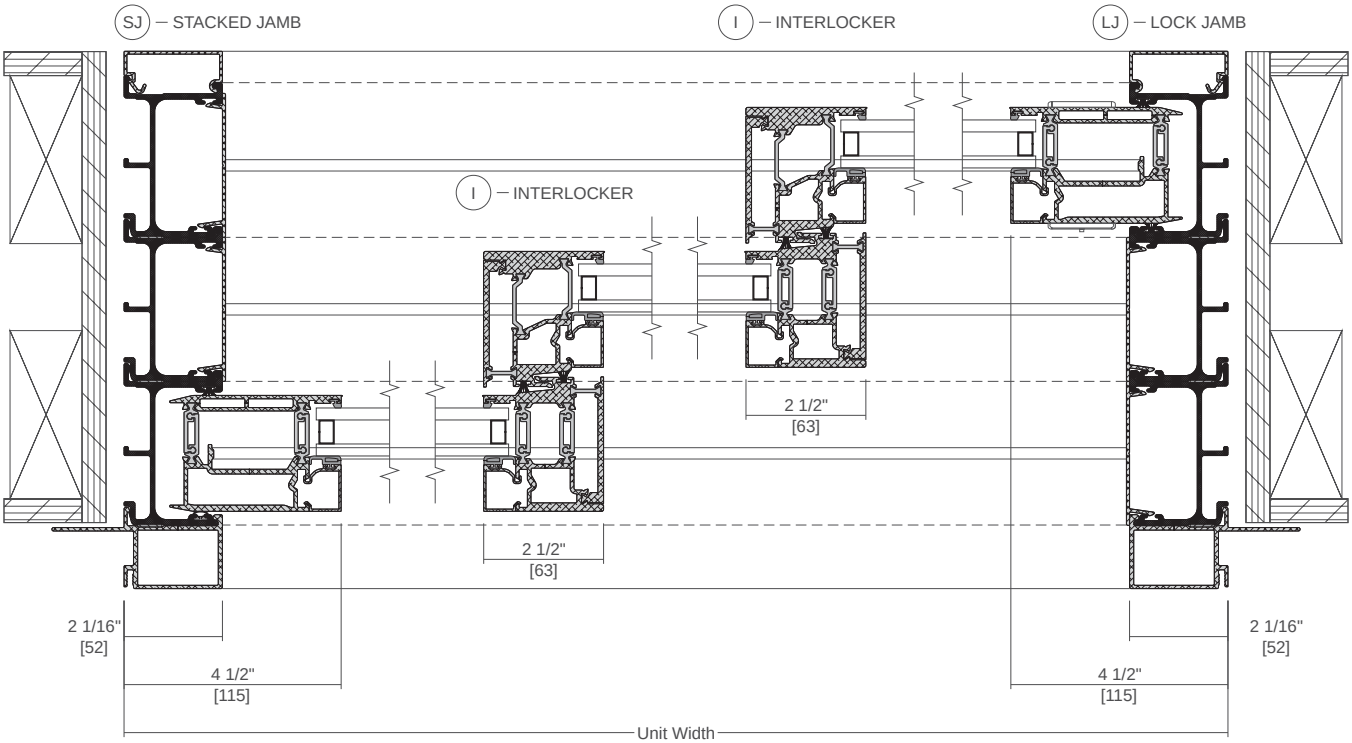

Scale 3" = 1' 0"

All dimensions are approximate.

Unit Sections

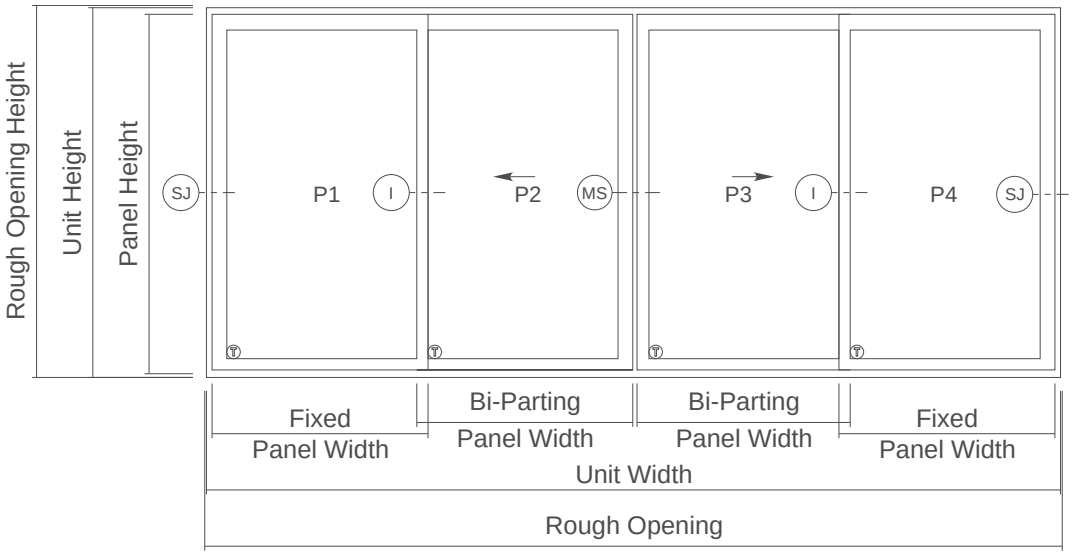

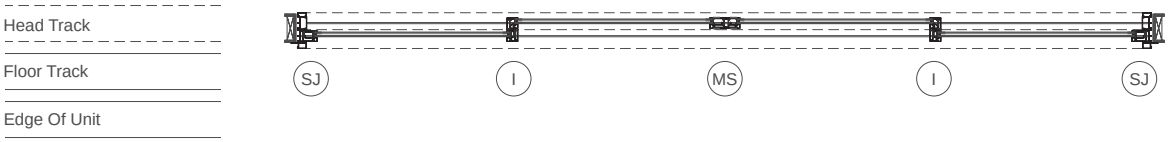

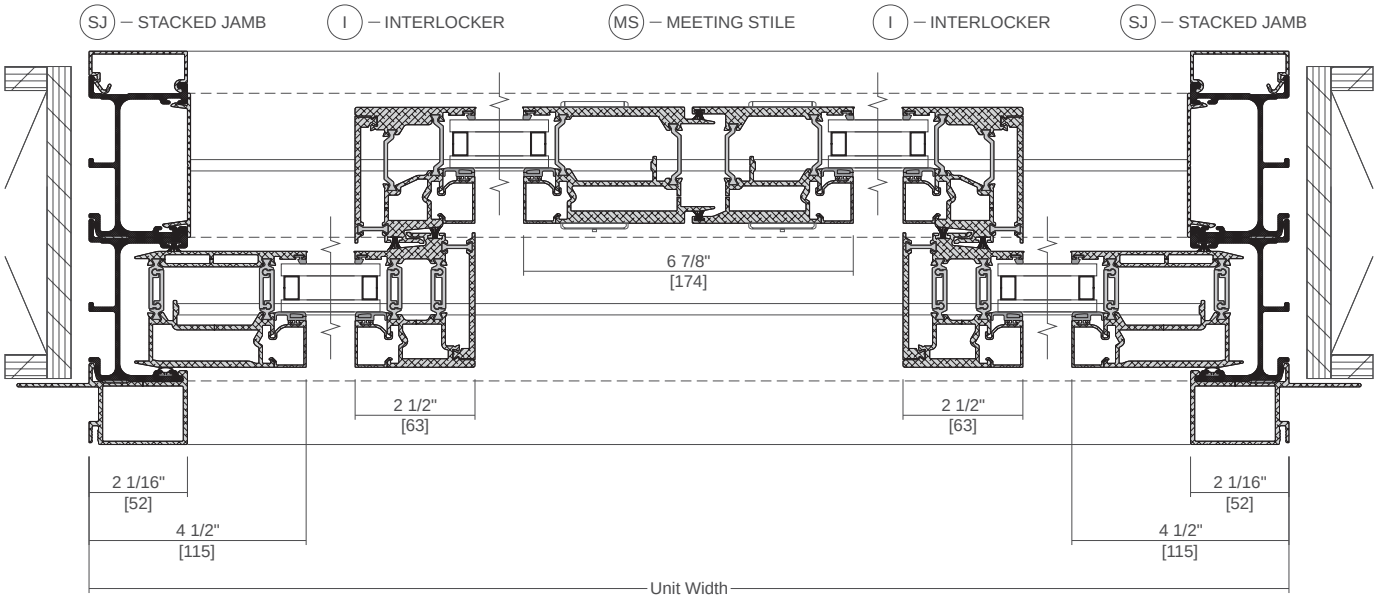

Scale 3" = 1' 0"

All dimensions are approximate.

Unit Sections

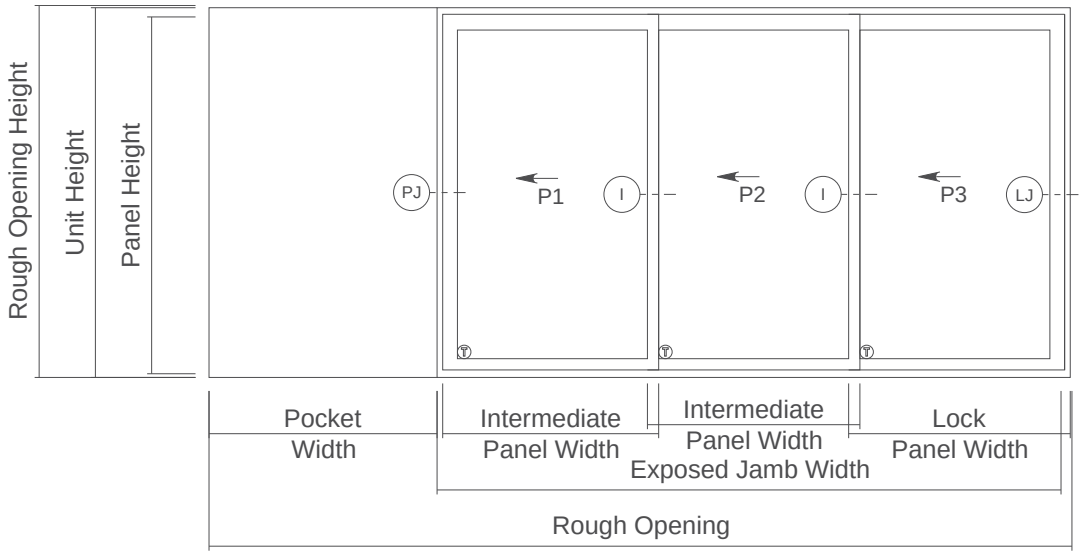

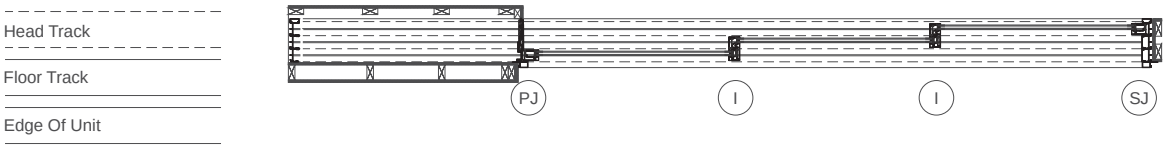

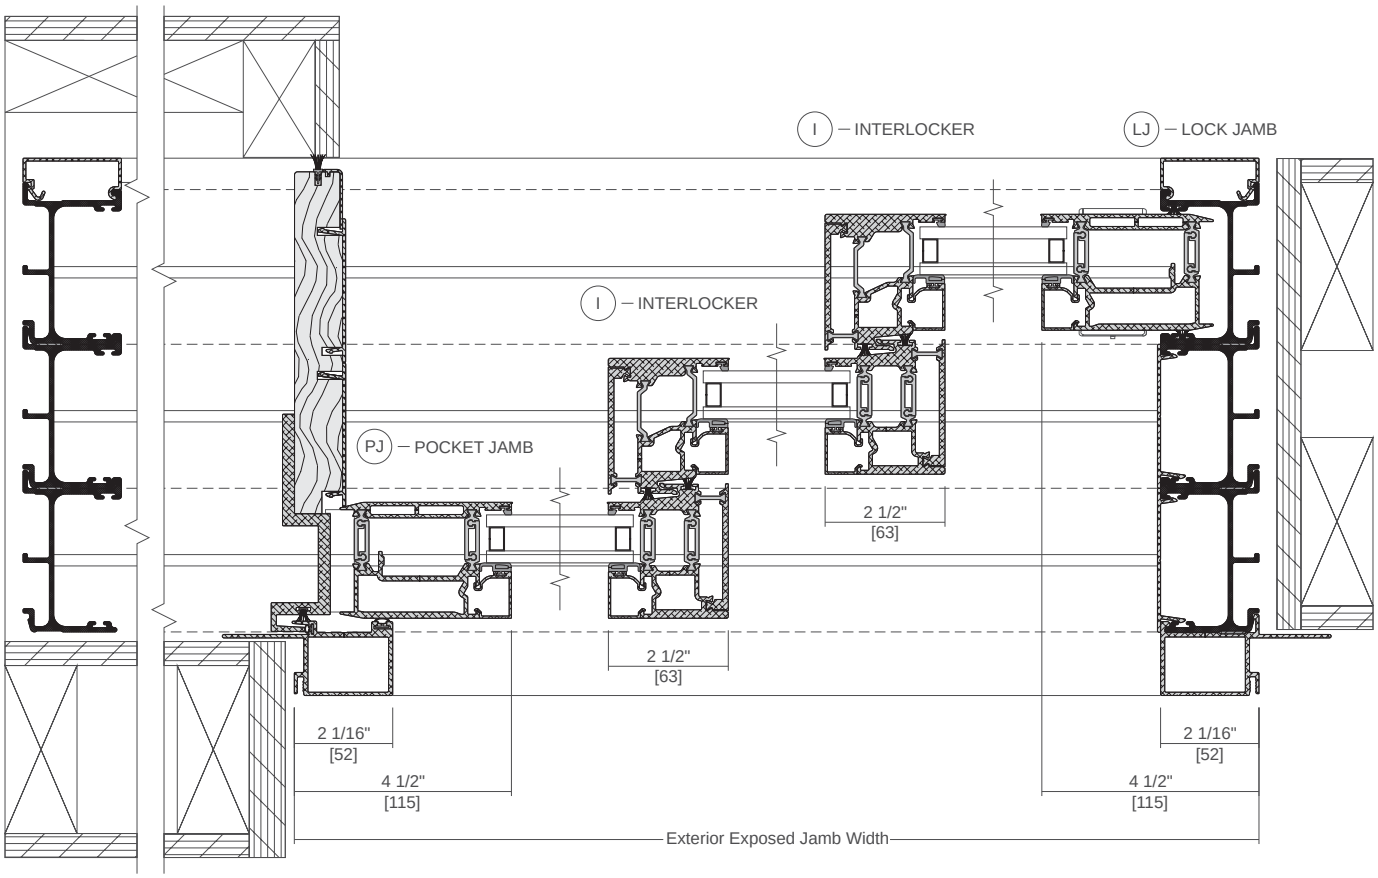

Scale 3" = 1' 0"

All dimensions are approximate.

Unit Sections

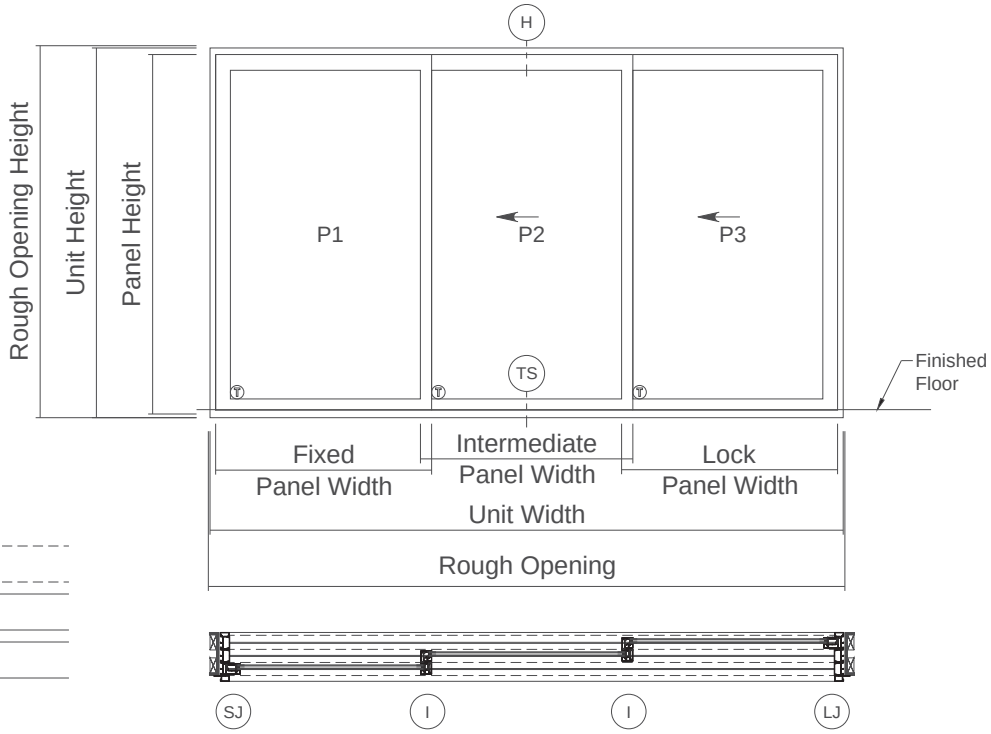

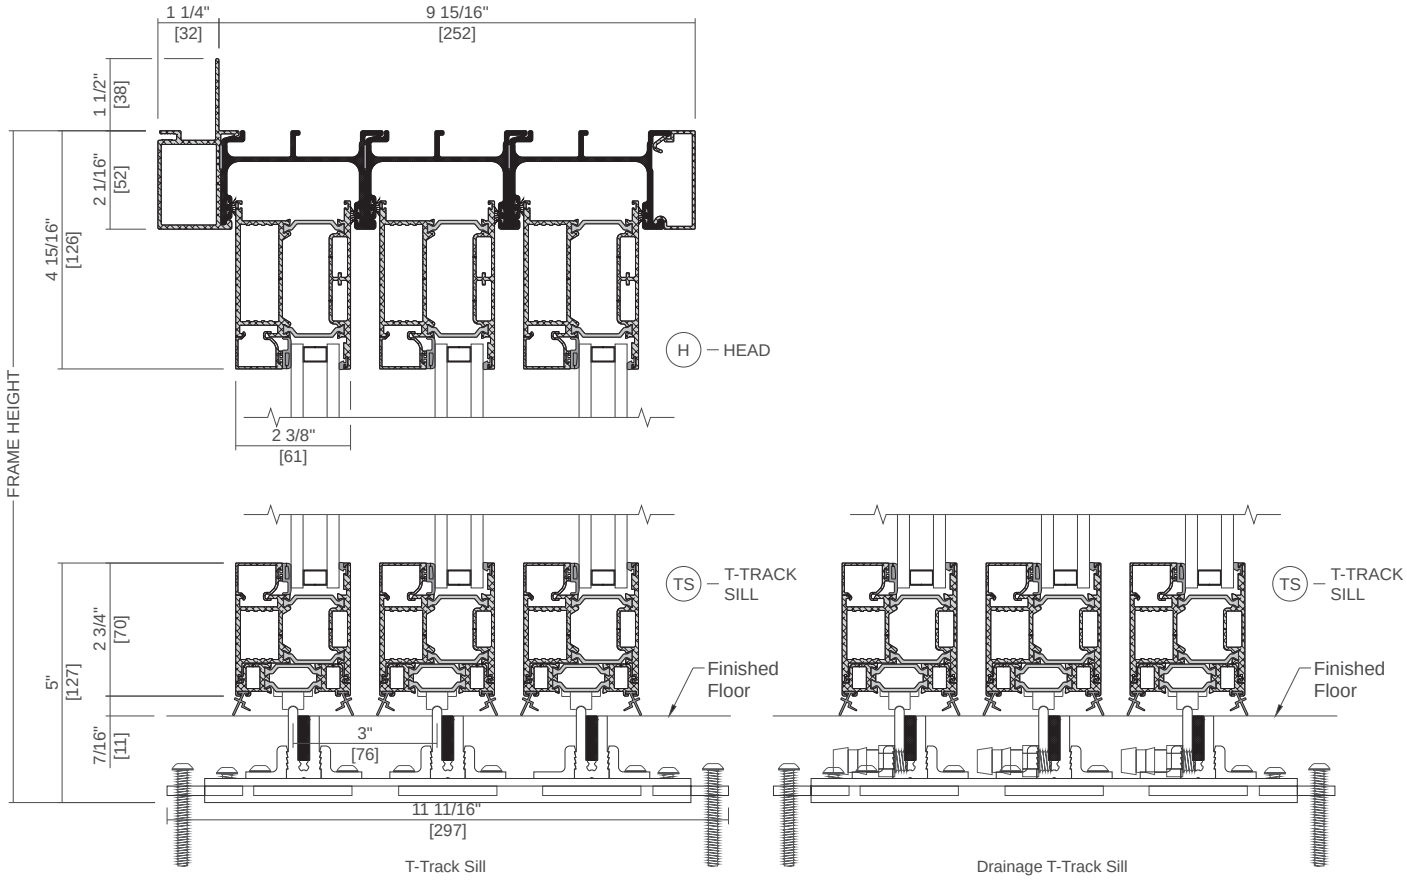

SILL PAN REQUIRED. CONSULT A WATER PROOFING CONSULTANT TO ENSURE ADEQUATE DRAINAGE.

Scale 3" = 1' 0"

All dimensions are approximate.